


Board
to
Board



Wire
to
Board

PCI

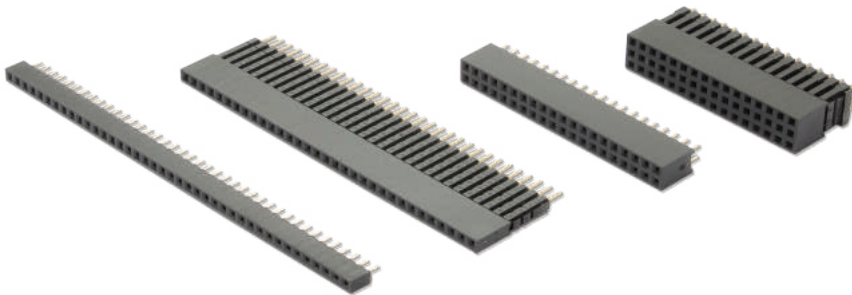

Greenconn ▶

Product selection guide
2019 - 20



I/O
connector


www.greenconn.com

solution for pitch 2.00mm

Board to Board




▶ Pin Header




GPFA101
GPFA102 Series

D01




GPFA103
GPFA104 Series

D02




GPFA110
GPFA111 Series

D03

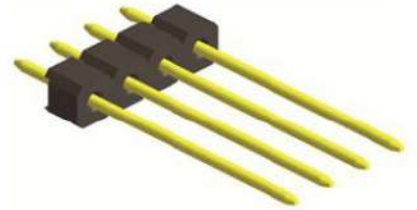


GPFA113 Series

D04

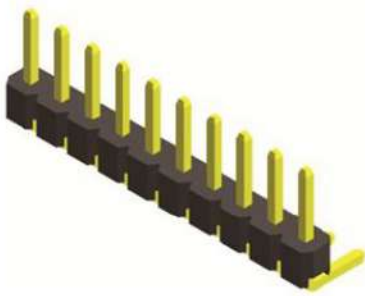


GPFB101
GPFB102 Series

D05




GPFB106 Series

D06

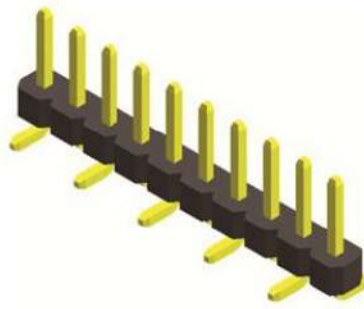

GPFC101
GPFC102 Series

D07

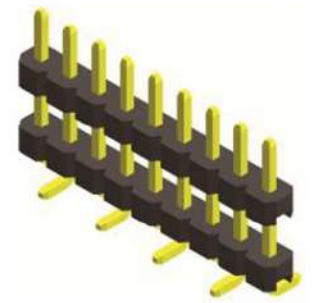


GPFC104 Series

D08




GPFD102 Series

D09

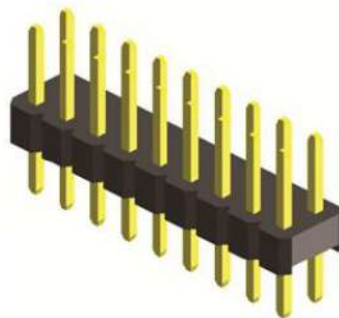


GPFA201
GPFA202 Series

D10



GPFA203
GPFA204 Series


D11

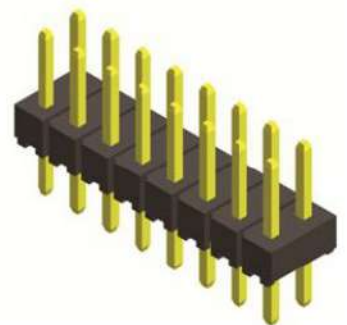

GPFA212
GPFA216 Series

D12

solution for pitch 2.00mm

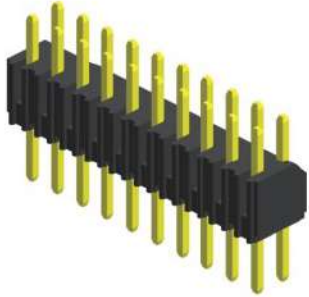

GPFA215 Series

D13



GPFB201
GPFB202 Series

D14




GPFB203 Series

D15




GPFB215 Series

D16

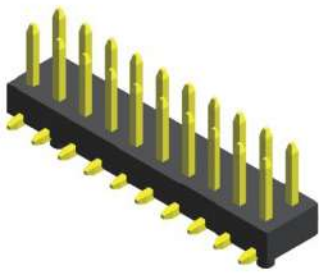

GPFC217 Series

D17

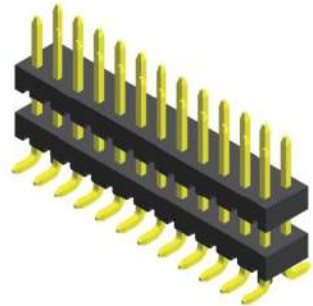


GPFC219 Series

D18




GPFD201 Series

D19

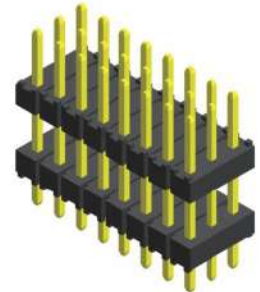


GPFA305 Series

D20

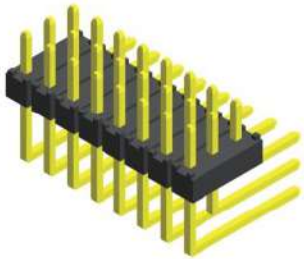


GPFB301 Series

D21

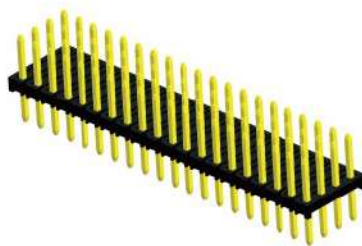

GPFA401 Series


D22

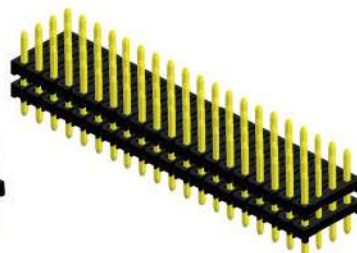

GPFA402 Series


D23

► Female Header

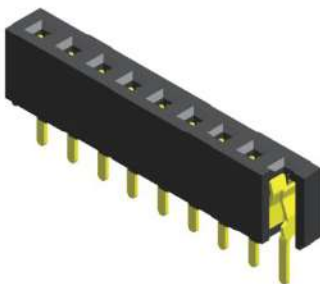


CSFA101 Series

D24



CSFA103 Series

D25



CSFA104 Series


D26



CSFB102 Series

D27

solution for pitch 2.00mm




CSFB107 Series

D28




CSFC101 Series

D29

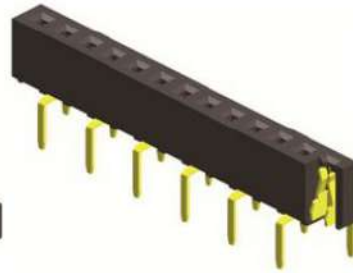


CSFF101 Series

D30




CSFA201 Series

D31

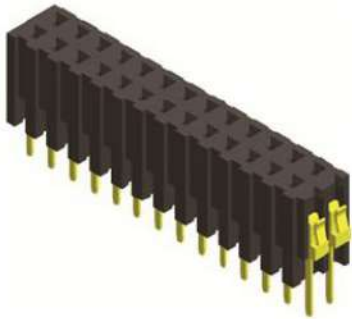


CSFA203 Series

D32




CSFA204 Series

D33




CSFA208
CSFA210 Series

D34

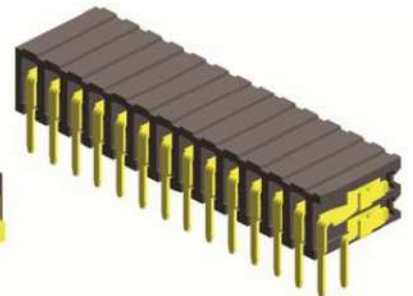


CSFB203 Series

D35

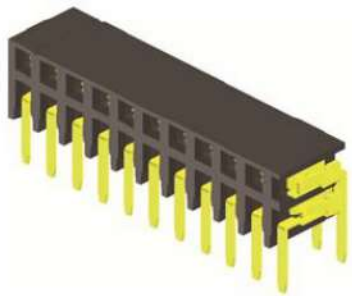


CSFB204 Series

D36




CSFB207 Series

D37




CSFB207 Series

D38

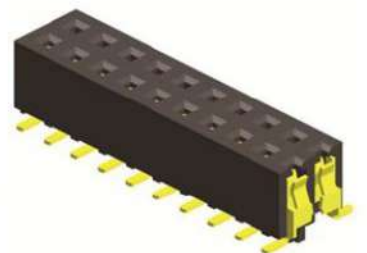

CSFC201 Series

D39

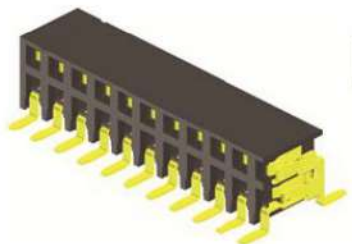

CSFC204 Series

D40




CSFC205 Series

D41



CSFC206 Series


D42

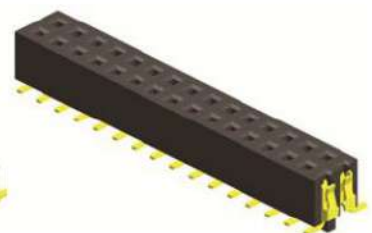

CSFC208
CSFC210 Series


D43

solution for pitch 2.00mm




CSFC215 Series

D44




CSFC215 Series

D45

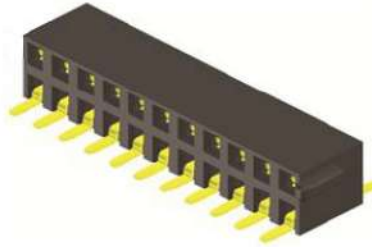


CSFC219 Series

D46

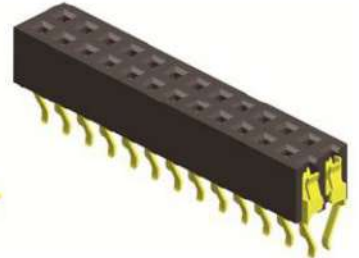


CSFE201 Series

D47




CSFF201 Series

D48




CSFF202 Series

D49




CSFA302 Series

D50

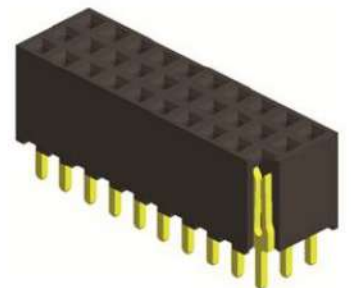


CSFA304 Series

D51

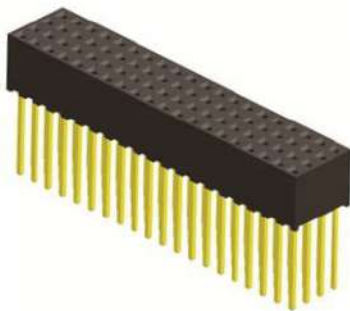

CSFA404 Series

D52

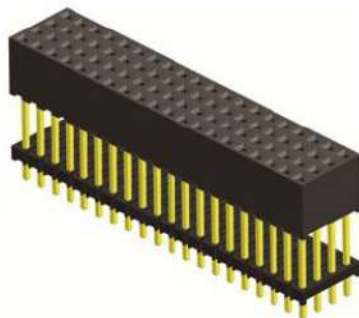

CSFA405 Series

D53

▶ Mini Jumper




CSFG106 Series

D54

solution for pitch 2.00mm


Wire to Board

► Box Header




GPFA213 Series

L01

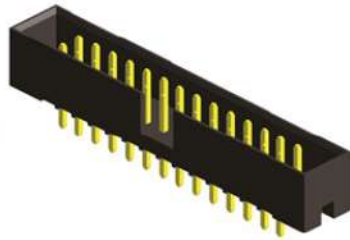


GPFA220 Series

L02

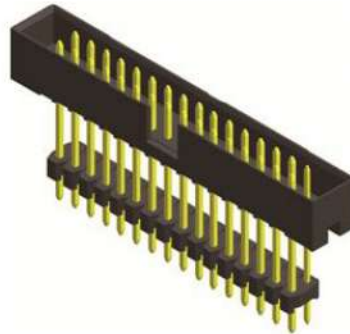


GPFA221 Series

L03




GPFA233 Series

L04




GPFA240 Series

L05




GPFB218 Series

L06

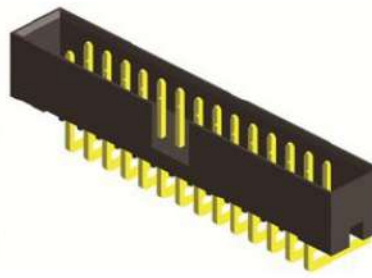


GPFB220 Series

L07

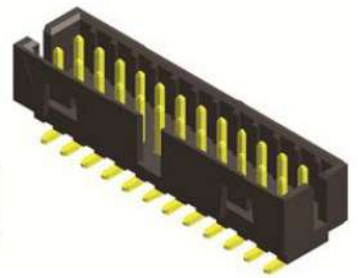


GPFC214 Series

L08




GPFC220 Series

L09



GPFC221 Series

L10




GPFC236 Series

L11

solution for pitch 2.00mm

▶ I.D.C. socket

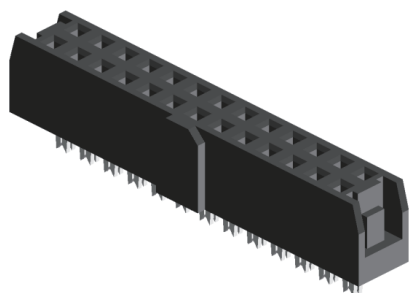

CKFA216 Series

L12

Pin Header

pitch 2.00mm (0.079") | Single row | Dip

GPFA101
GPFA102 Series


Specifications

Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C





Materials

Contact Material :	Brass
Insulation Material :	High Temperature Thermoplastic, 94V-0 Nylon

All materials must meet Greenconn's requirements for environmental protection.

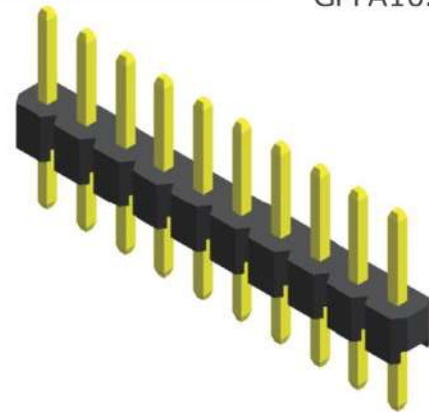

Mating with

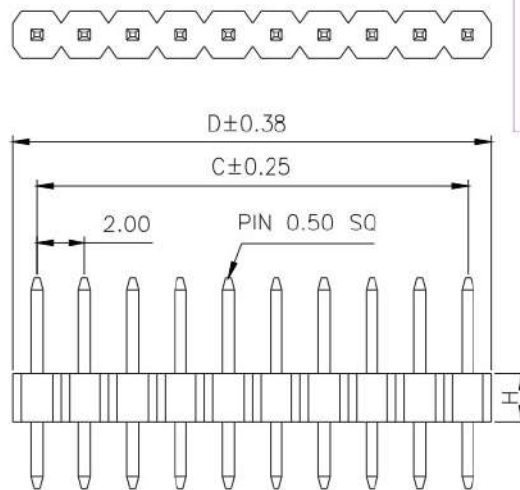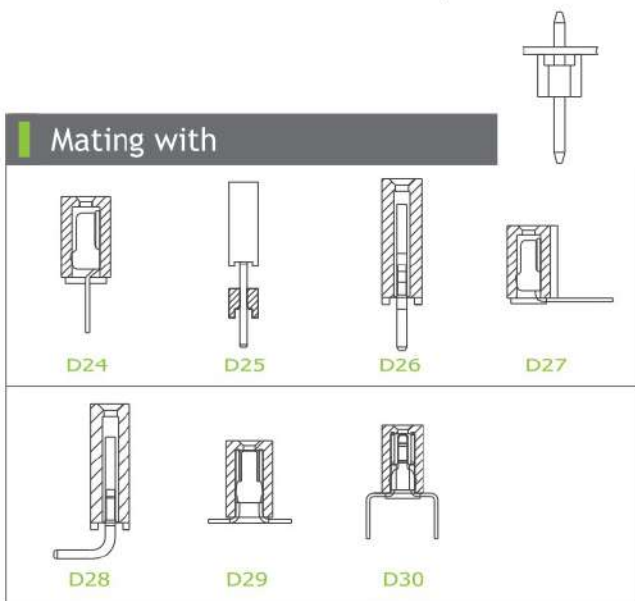

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	C	D			C	D			C	D			C	D	
02	2.00	4.00		11	20.00	22.00		21	40.00	42.00		31	60.00	62.00	
03	4.00	6.00		12	22.00	24.00		22	42.00	44.00		32	62.00	64.00	
04	6.00	8.00		13	24.00	26.00		23	44.00	46.00		33	64.00	66.00	
05	8.00	10.00		14	26.00	28.00		24	46.00	48.00		34	66.00	68.00	
06	10.00	12.00		15	28.00	30.00		25	48.00	50.00		35	68.00	70.00	
07	12.00	14.00		16	30.00	32.00		26	50.00	52.00		36	70.00	72.00	
08	14.00	16.00		17	32.00	34.00		27	52.00	54.00		37	72.00	74.00	
09	16.00	18.00		18	34.00	36.00		28	54.00	56.00		38	74.00	76.00	
10	18.00	20.00		19	36.00	38.00		29	56.00	58.00		39	76.00	78.00	
				20	38.00	40.00		30	58.00	60.00		40	78.00	80.00	

Ordering Information

GPFA1

Height Option (H)

- : H=2.00
- : H=1.50

-

No. of Pins per Row

-
-

Standard Plating

- : Gold Flash

Selective Plating

- : Tin
- : Gold Flash / Tin

Standard Packaging : Box

Pin Length (A/B)

- : A=4.00 / B=2.80
- : A=4.00 / B=2.80

For special length requirement
Please contact our sales personnel

R1BA

Pin Header

pitch 2.00mm (0.079") | Single row | Dip

GPFA110
GPFA111 Series


Specifications

Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C



Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 LCP

All materials must meet Greenconn's requirements for environmental protection.

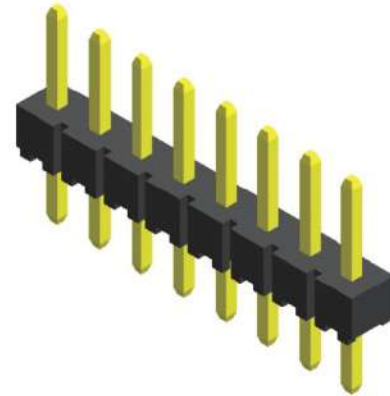

Mating with

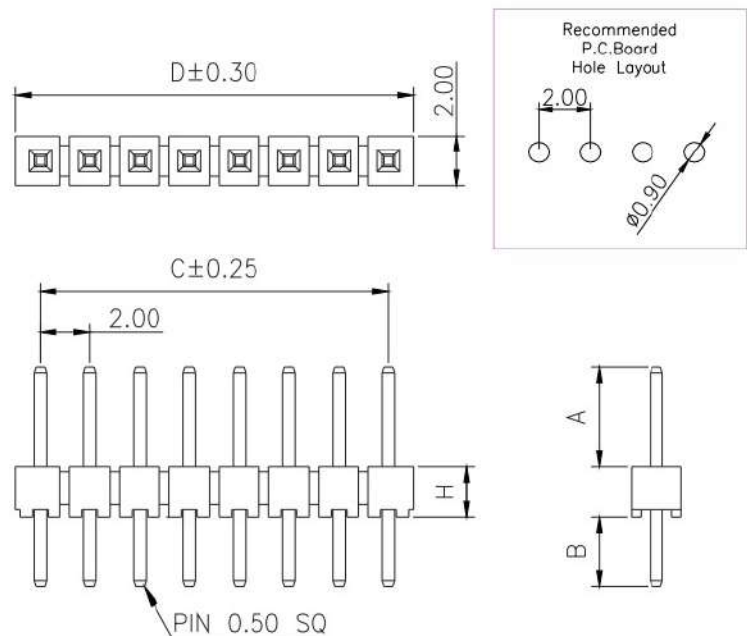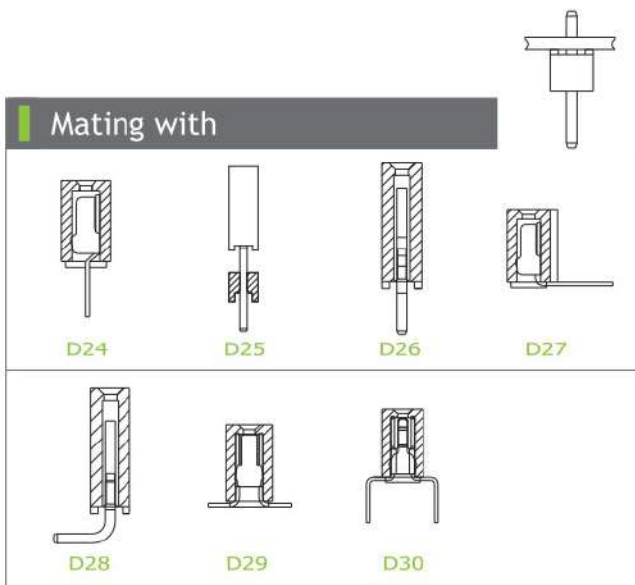

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	C	D		C	D		C	D		C	D
02	2.00	4.00	11	20.00	22.00	21	40.00	42.00	31	60.00	62.00
03	4.00	6.00	12	22.00	24.00	22	42.00	44.00	32	62.00	64.00
04	6.00	8.00	13	24.00	26.00	23	44.00	46.00	33	64.00	66.00
05	8.00	10.00	14	26.00	28.00	24	46.00	48.00	34	66.00	68.00
06	10.00	12.00	15	28.00	30.00	25	48.00	50.00	35	68.00	70.00
07	12.00	14.00	16	30.00	32.00	26	50.00	52.00	36	70.00	72.00
08	14.00	16.00	17	32.00	34.00	27	52.00	54.00	37	72.00	74.00
09	16.00	18.00	18	34.00	36.00	28	54.00	56.00	38	74.00	76.00
10	18.00	20.00	19	36.00	38.00	29	56.00	58.00	39	76.00	78.00
			20	38.00	40.00	30	58.00	60.00	40	78.00	80.00

Ordering Information

GPFA1	<input type="checkbox"/> <input type="checkbox"/>	-	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	C1AA
	Height Option (H)		No. of Pins per Row	Standard Plating		GPFA110...A	Pin Length (A/B)	
	<input type="checkbox"/> 10 : H=2.00		<input type="checkbox"/> 02	<input type="checkbox"/> 02 : Gold Flash		GPFA111...A	<input type="checkbox"/> 001 : A=4.00 / B=2.80	
	<input type="checkbox"/> 11 : H=1.50		<input type="checkbox"/> ?	Selective Plating			<input type="checkbox"/> 001 : A=4.00 / B=2.80	
			<input type="checkbox"/> 40	<input type="checkbox"/> 01 : Tin				
				<input type="checkbox"/> 05 : Gold Flash / Tin				

Standard Packaging : Box

For special length requirement
Please contact our sales personnel


Pin Header

pitch 2.00mm (0.079") | Single row | Dip

GPFA113 Series

Specifications

Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C


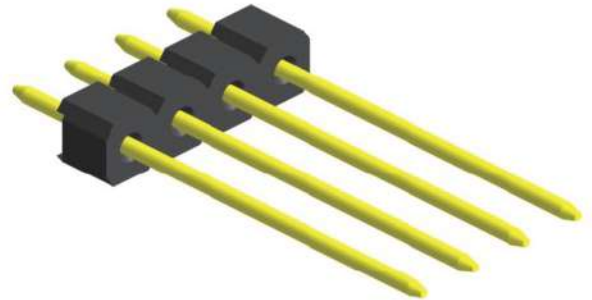


Materials

Contact Material :	Brass
Insulation Material :	High Temperature Thermoplastic, 94V-0 PBT

All materials must meet Greenconn's requirements for environmental protection.

Mating with

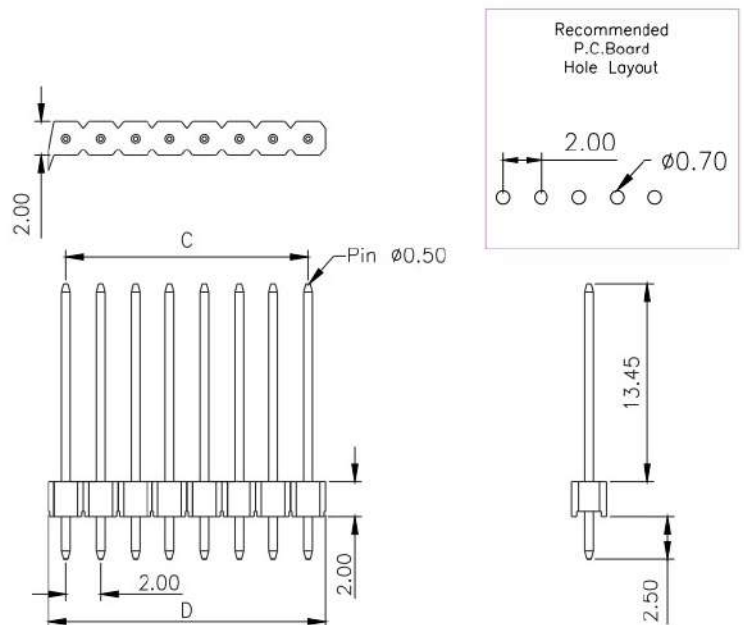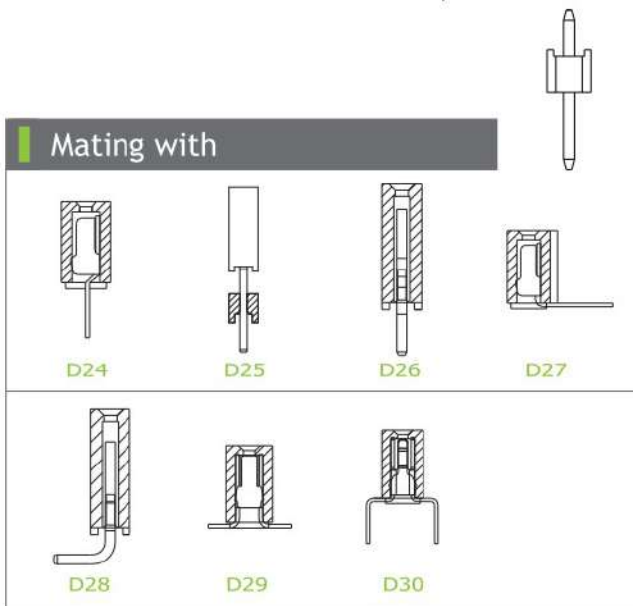

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	C	D		C	D		C	D		C	D
			11	20.00	22.00	21	40.00	42.00	31	60.00	62.00
			12	22.00	24.00	22	42.00	44.00	32	62.00	64.00
			13	24.00	26.00	23	44.00	46.00			
04	6.00	8.00	14	26.00	28.00	24	46.00	48.00			
05	8.00	10.00	15	28.00	30.00	25	48.00	50.00			
06	10.00	12.00	16	30.00	32.00	26	50.00	52.00			
07	12.00	14.00	17	32.00	34.00	27	52.00	54.00			
08	14.00	16.00	18	34.00	36.00	28	54.00	56.00			
09	16.00	18.00	19	36.00	38.00	29	56.00	58.00			
10	18.00	20.00	20	38.00	40.00	30	58.00	60.00			

Ordering Information

Standard Packaging : Box

GPFA1	<input type="checkbox"/> <input type="checkbox"/>	-	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	A001A1BA
	Height Option (H)		No. of Pins per Row	Standard Plating	
	<input type="checkbox"/> 13		<input type="checkbox"/> 04	<input type="checkbox"/> 01 : Tin	
			<input type="checkbox"/> ?	<input type="checkbox"/> 02 : Gold Flash	
			<input type="checkbox"/> 32	Selective Plating	
				<input type="checkbox"/> 05 : Gold Flash / Tin	

Pin Header

pitch 2.00mm (0.079") | Single row | R/A

GPFB101
GPFB102 Series


Specifications

Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C





Materials

Contact Material :	Brass
Insulation Material :	High Temperature Thermoplastic, 94V-0 Nylon

All materials must meet Greenconn's requirements for environmental protection.

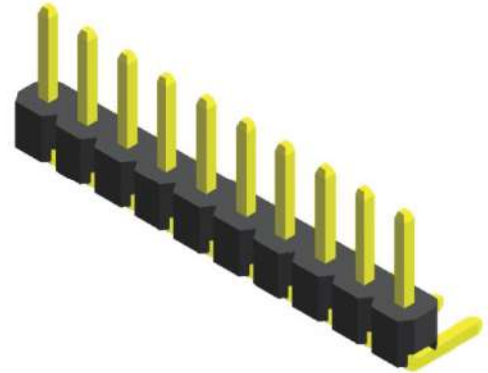

Mating with

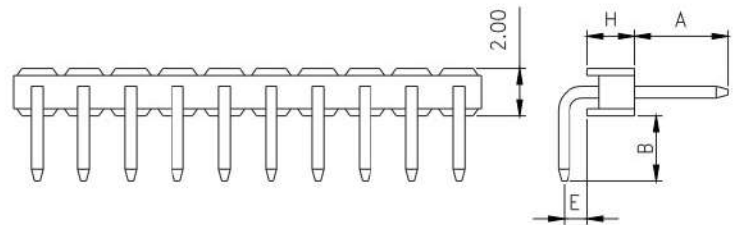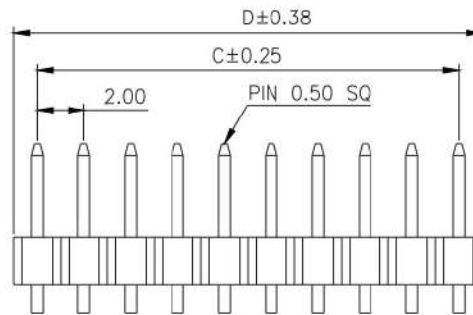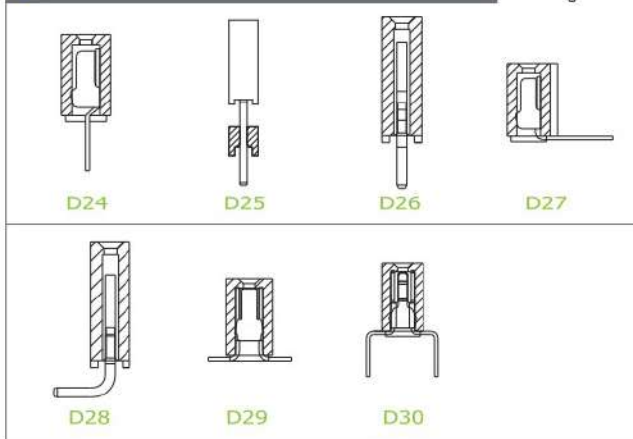

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	C	D		C	D		C	D		C	D
02	2.00	4.00	11	20.00	22.00	21	40.00	42.00	31	60.00	62.00
03	4.00	6.00	12	22.00	24.00	22	42.00	44.00	32	62.00	64.00
04	6.00	8.00	13	24.00	26.00	23	44.00	46.00	33	64.00	66.00
05	8.00	10.00	14	26.00	28.00	24	46.00	48.00	34	66.00	68.00
06	10.00	12.00	15	28.00	30.00	25	48.00	50.00	35	68.00	70.00
07	12.00	14.00	16	30.00	32.00	26	50.00	52.00	36	70.00	72.00
08	14.00	16.00	17	32.00	34.00	27	52.00	54.00	37	72.00	74.00
09	16.00	18.00	18	34.00	36.00	28	54.00	56.00	38	74.00	76.00
10	18.00	20.00	19	36.00	38.00	29	56.00	58.00	39	76.00	78.00
			20	38.00	40.00	30	58.00	60.00	40	78.00	80.00

Ordering Information

GPFB1	<input type="checkbox"/> <input type="checkbox"/>	-	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	R1BC
	Height Option (H)		No. of Pins per Row	Standard Plating	Pin Length (A/B/E)	
	<input type="checkbox"/> 01 : H=2.00		<input type="checkbox"/> 02	<input type="checkbox"/> 02 : Gold Flash	<input type="checkbox"/> 001 : A=4.00 / B=2.80 / E=1.00	
	<input type="checkbox"/> 02 : H=1.50		<input type="checkbox"/> ?	Selective Plating	<input type="checkbox"/> 006 : A=3.00 / B=3.00 / E=1.50	
			<input type="checkbox"/> 40	<input type="checkbox"/> 01 : Tin	For special length requirement Please contact our sales personnel	
				<input type="checkbox"/> 05 : Gold Flash / Tin		

Pin Header

pitch 2.00mm (0.079") | Single row | R/A | Board spacer

GPFB106 Series


Specifications

Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C


Materials

Contact Material :	Brass
Insulation Material :	High Temperature Thermoplastic, 94V-0 Nylon

All materials must meet Greenconn's requirements for environmental protection.

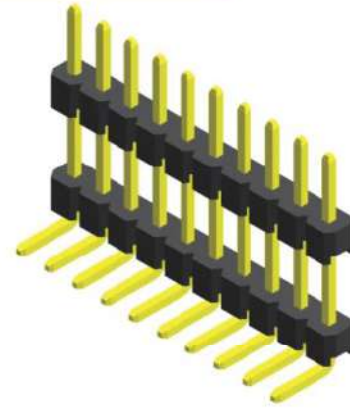

Mating with

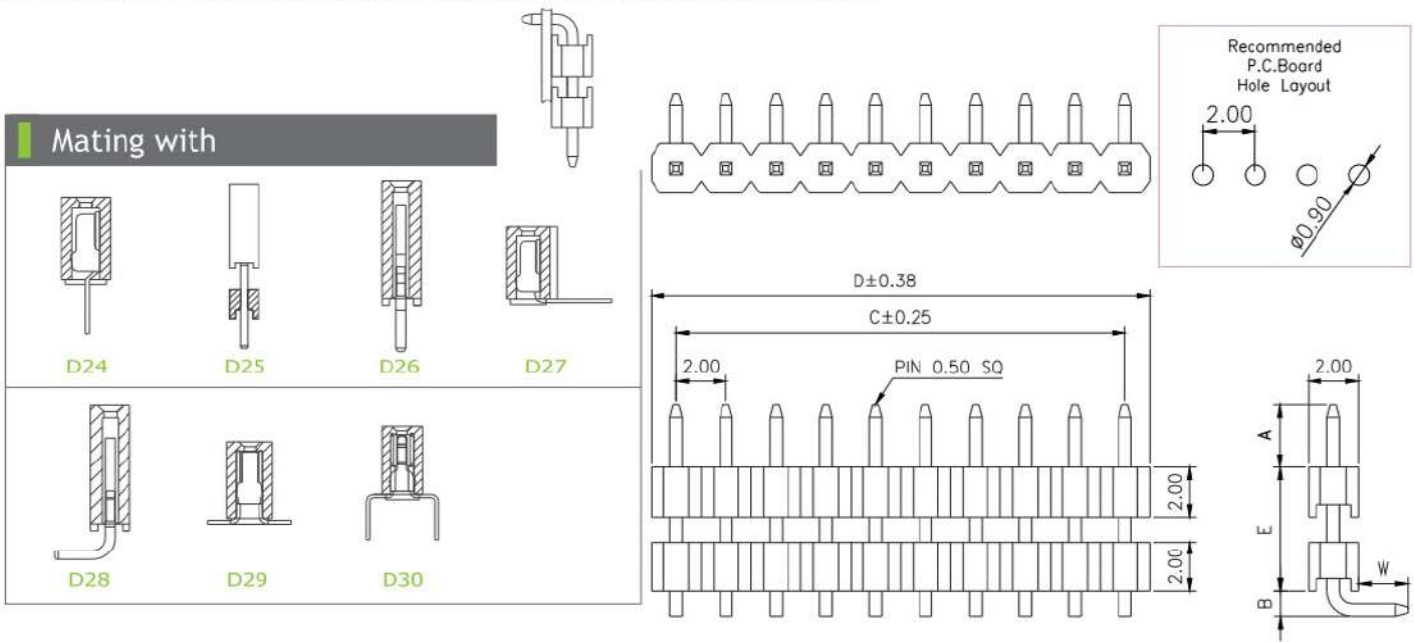

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	C	D			C	D			C	D			C	D	
02	2.00	4.00		11	20.00	22.00		21	40.00	42.00		31	60.00	62.00	
03	4.00	6.00		12	22.00	24.00		22	42.00	44.00		32	62.00	64.00	
04	6.00	8.00		13	24.00	26.00		23	44.00	46.00		33	64.00	66.00	
05	8.00	10.00		14	26.00	28.00		24	46.00	48.00		34	66.00	68.00	
06	10.00	12.00		15	28.00	30.00		25	48.00	50.00		35	68.00	70.00	
07	12.00	14.00		16	30.00	32.00		26	50.00	52.00		36	70.00	72.00	
08	14.00	16.00		17	32.00	34.00		27	52.00	54.00		37	72.00	74.00	
09	16.00	18.00		18	34.00	36.00		28	54.00	56.00		38	74.00	76.00	
10	18.00	20.00		19	36.00	38.00		29	56.00	58.00		39	76.00	78.00	
				20	38.00	40.00		30	58.00	60.00		40	78.00	80.00	

Ordering Information

GPFB1	<input type="checkbox"/> <input type="checkbox"/>	-	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	R1BC
	Height Option (H)		No. of Pins per Row	Standard Plating	Pin Length (A/B/E/W)	
	<input type="checkbox"/> 06		<input type="checkbox"/> 02	<input type="checkbox"/> 02 : Gold Flash	<input type="checkbox"/> 003 : A=10.0/B=1.52/E=6.25/W=3.09	
			<input type="checkbox"/> 40	Selective Plating	For special length requirement Please contact our sales personnel	
				<input type="checkbox"/> 01 : Tin		
				<input type="checkbox"/> 05 : Gold Flash / Tin		

Pin Header

pitch 2.00mm (0.079") | Single row | S.M.T.

GPFC101
GPFC102 Series


Specifications

Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C



Materials

Contact Material :	Brass
Insulation Material :	High Temperature Thermoplastic, 94V-0 Nylon

All materials must meet Greenconn's requirements for environmental protection.

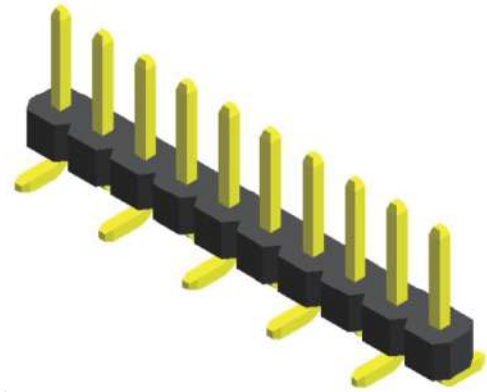

Mating with

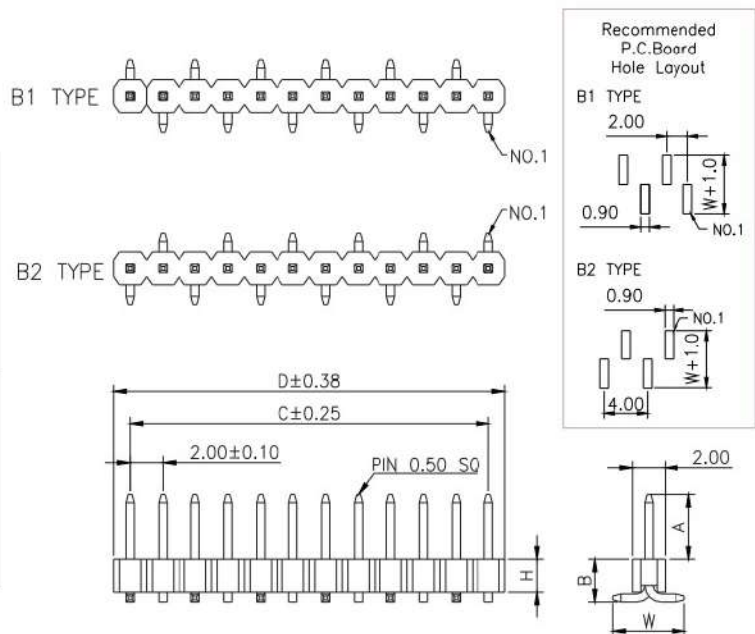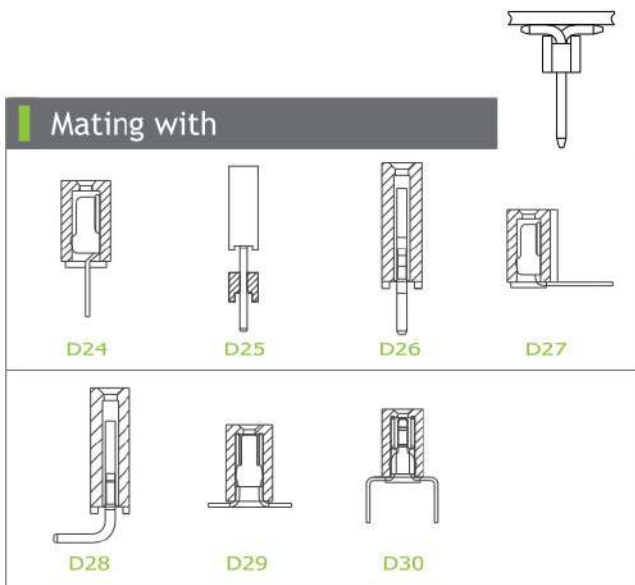

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	C	D		C	D		C	D		C	D
02	2.00	4.00	11	20.00	22.00	21	40.00	42.00	31	60.00	62.00
03	4.00	6.00	12	22.00	24.00	22	42.00	44.00	32	62.00	64.00
04	6.00	8.00	13	24.00	26.00	23	44.00	46.00	33	64.00	66.00
05	8.00	10.00	14	26.00	28.00	24	46.00	48.00	34	66.00	68.00
06	10.00	12.00	15	28.00	30.00	25	48.00	50.00	35	68.00	70.00
07	12.00	14.00	16	30.00	32.00	26	50.00	52.00	36	70.00	72.00
08	14.00	16.00	17	32.00	34.00	27	52.00	54.00	37	72.00	74.00
09	16.00	18.00	18	34.00	36.00	28	54.00	56.00	38	74.00	76.00
10	18.00	20.00	19	36.00	38.00	29	56.00	58.00	39	76.00	78.00
			20	38.00	40.00	30	58.00	60.00	40	78.00	80.00

Ordering Information

GPFC1	<input type="checkbox"/> <input type="checkbox"/>	-	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	R1BC
	Height Option (H)		No. of Pins per Row	Standard Plating	Pin Length (A/B/W) (Type)	
	<input type="checkbox"/> 01 : H=2.00		<input type="checkbox"/> 02	<input type="checkbox"/> 02 : Gold Flash	<input type="checkbox"/> 006 : A=4.00 / B=2.60 / W=4.40 (B1)	
	<input type="checkbox"/> 02 : H=1.50		<input type="checkbox"/> ?	Selective Plating	<input type="checkbox"/> 002 : A=4.00 / B=2.10 / W=4.40 (B2)	
			<input type="checkbox"/> 40	<input type="checkbox"/> 01 : Tin	For special length requirement Please contact our sales personnel	
				<input type="checkbox"/> 05 : Gold Flash / Tin		

Standard Packaging : Tube

Pin Header

pitch 2.00mm (0.079") | Single row | S.M.T.

GPFD102 Series

Specifications

Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C


Materials

Contact Material :	Brass
Insulation Material :	High Temperature Thermoplastic, 94V-0 Nylon

All materials must meet Greenconn's requirements for environmental protection.



Mating with

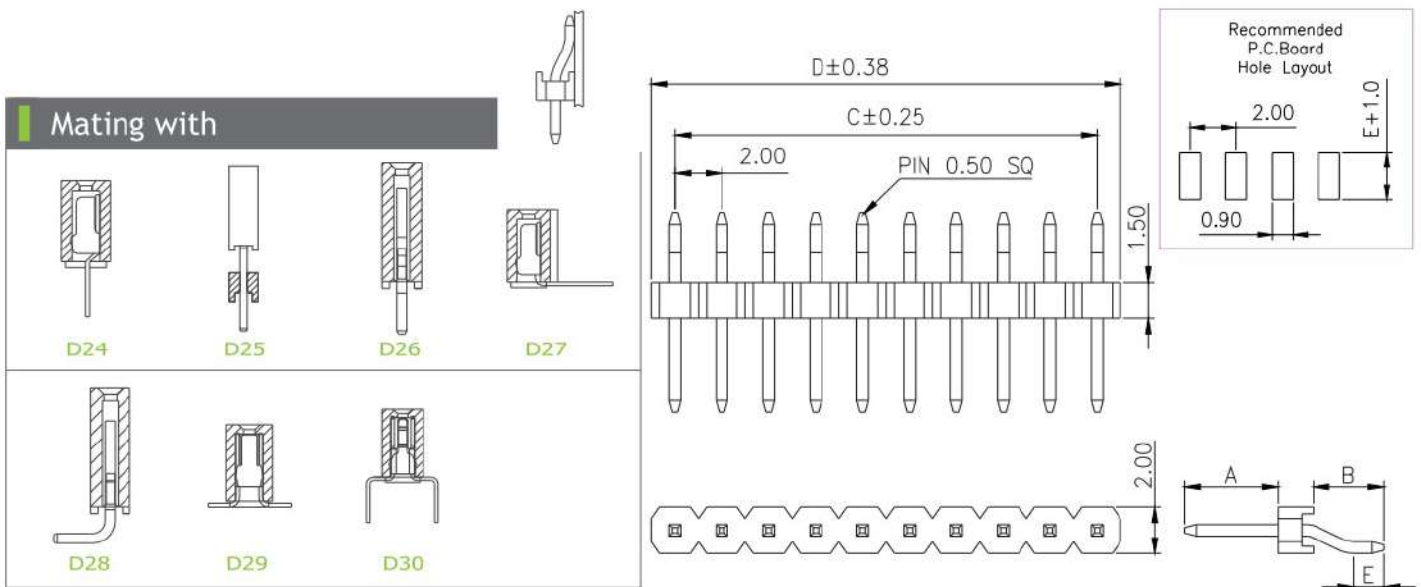

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	C	D		C	D		C	D		C	D
02	2.00	4.00	11	20.00	22.00	21	40.00	42.00	31	60.00	62.00
03	4.00	6.00	12	22.00	24.00	22	42.00	44.00	32	62.00	64.00
04	6.00	8.00	13	24.00	26.00	23	44.00	46.00	33	64.00	66.00
05	8.00	10.00	14	26.00	28.00	24	46.00	48.00	34	66.00	68.00
06	10.00	12.00	15	28.00	30.00	25	48.00	50.00	35	68.00	70.00
07	12.00	14.00	16	30.00	32.00	26	50.00	52.00	36	70.00	72.00
08	14.00	16.00	17	32.00	34.00	27	52.00	54.00	37	72.00	74.00
09	16.00	18.00	18	34.00	36.00	28	54.00	56.00	38	74.00	76.00
10	18.00	20.00	19	36.00	38.00	29	56.00	58.00	39	76.00	78.00
			20	38.00	40.00	30	58.00	60.00	40	78.00	80.00

Ordering Information

Standard Packaging : Tube

GPFD1	<input type="checkbox"/> <input type="checkbox"/>	-	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	R1BC
	Height Option (H)		No. of Pins per Row	Standard Plating	Pin Length (A/B/E)	
	<input type="checkbox"/> <input type="checkbox"/>		<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> : Gold Flash	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> : A=4.00 / B=3.00 / E=1.27	
	<input type="checkbox"/> <input type="checkbox"/>		<input type="checkbox"/> <input type="checkbox"/>	Selective Plating	<input type="checkbox"/> <input type="checkbox"/> : A=3.00 / B=2.30 / E=0.95	
	<input type="checkbox"/> <input type="checkbox"/>		<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> : Tin	For special length requirement Please contact our sales personnel	
	<input type="checkbox"/> <input type="checkbox"/>		<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> : Gold Flash / Tin		

Pin Header

pitch 2.00mm (0.079") | Dual row | Dip

GPFA201
GPFA202 Series


Specifications

Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C



Materials

Contact Material :	Brass
Insulation Material :	High Temperature Thermoplastic, 94V-0 Nylon

All materials must meet Greenconn's requirements for environmental protection.

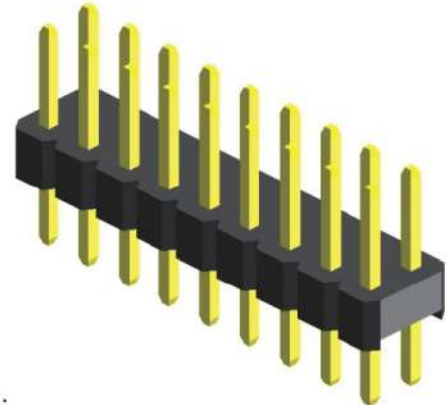

Mating with

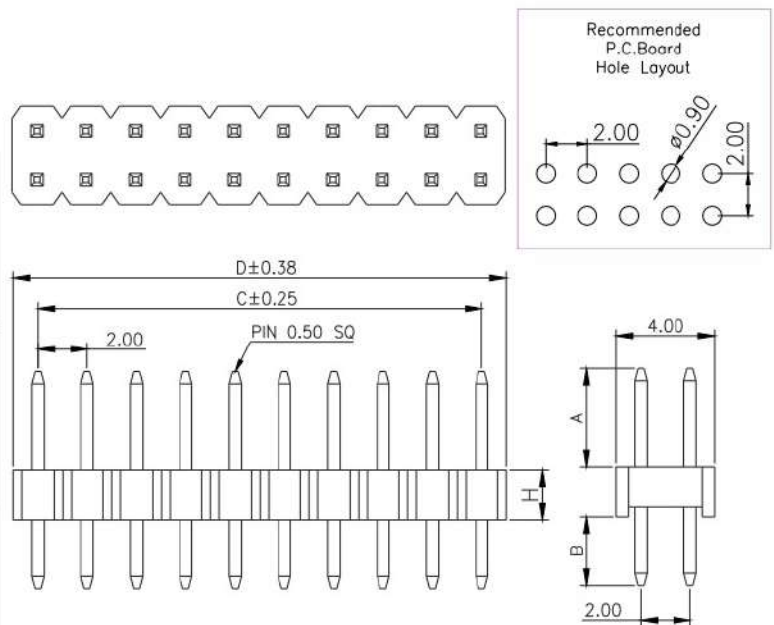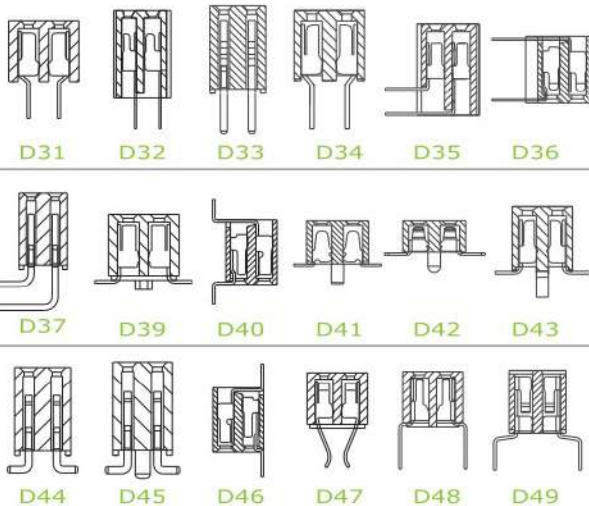

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	C	D		C	D		C	D		C	D
02	2.00	4.00	11	20.00	22.00	21	40.00	42.00	31	60.00	62.00
03	4.00	6.00	12	22.00	24.00	22	42.00	44.00	32	62.00	64.00
04	6.00	8.00	13	24.00	26.00	23	44.00	46.00	33	64.00	66.00
05	8.00	10.00	14	26.00	28.00	24	46.00	48.00	34	66.00	68.00
06	10.00	12.00	15	28.00	30.00	25	48.00	50.00	35	68.00	70.00
07	12.00	14.00	16	30.00	32.00	26	50.00	52.00	36	70.00	72.00
08	14.00	16.00	17	32.00	34.00	27	52.00	54.00	37	72.00	74.00
09	16.00	18.00	18	34.00	36.00	28	54.00	56.00	38	74.00	76.00
10	18.00	20.00	19	36.00	38.00	29	56.00	58.00	39	76.00	78.00
			20	38.00	40.00	30	58.00	60.00	40	78.00	80.00

Ordering Information

GPFA2	<input type="checkbox"/> <input type="checkbox"/>	-	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	R1BA
	Height Option (H)		No. of Pins per Row	Standard Plating	Pin Length (A/B)	
	<input type="checkbox"/> 01 : H=2.00		<input type="checkbox"/> 02	<input type="checkbox"/> 02 : Gold Flash	<input type="checkbox"/> 001 : A=4.00 / B=2.80	
	<input type="checkbox"/> 02 : H=1.50		<input type="checkbox"/> ?	GPFA201...A	<input type="checkbox"/> 019 : A=3.20 / B=3.50	
			<input type="checkbox"/> 40	GPFA202...A		
				Selective Plating		
				<input type="checkbox"/> 01 : Tin		
				<input type="checkbox"/> 05 : Gold Flash / Tin		

Standard Packaging : Box

For special length requirement
Please contact our sales personnel

Pin Header

pitch 2.00mm (0.079") | Dual row | Dip | Board spacer

GPFA203
GPFA204 Series



Specifications

Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C





Materials

Contact Material :	Brass
Insulation Material :	High Temperature Thermoplastic, 94V-0 Nylon

All materials must meet Greenconn's requirements for environmental protection.

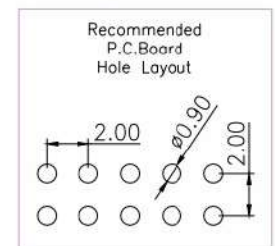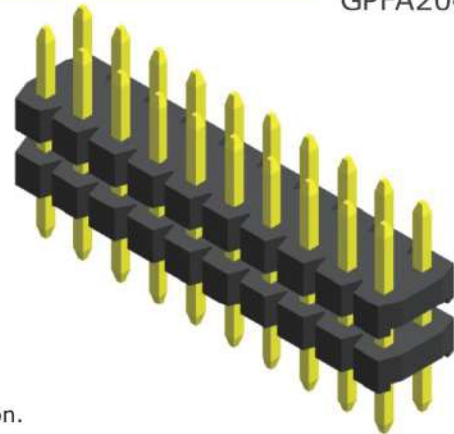

Mating with

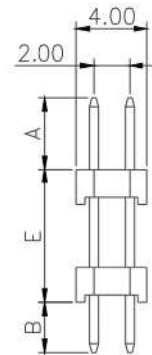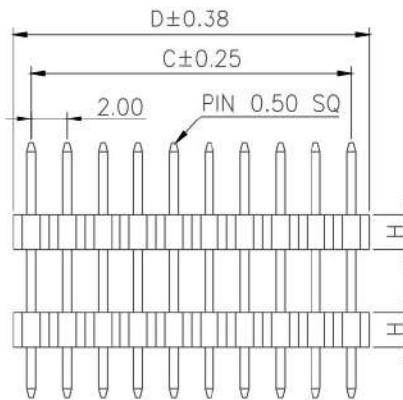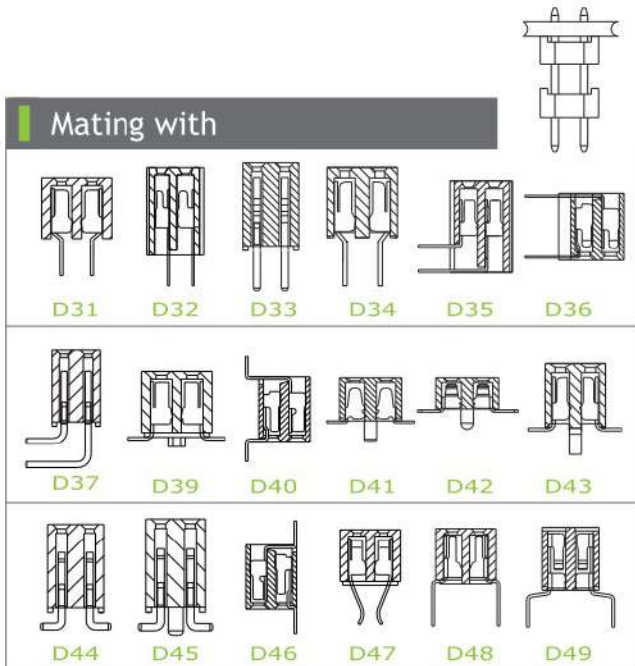

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	C	D		C	D		C	D		C	D
02	2.00	4.00	11	20.00	22.00	21	40.00	42.00	31	60.00	62.00
03	4.00	6.00	12	22.00	24.00	22	42.00	44.00	32	62.00	64.00
04	6.00	8.00	13	24.00	26.00	23	44.00	46.00	33	64.00	66.00
05	8.00	10.00	14	26.00	28.00	24	46.00	48.00	34	66.00	68.00
06	10.00	12.00	15	28.00	30.00	25	48.00	50.00	35	68.00	70.00
07	12.00	14.00	16	30.00	32.00	26	50.00	52.00	36	70.00	72.00
08	14.00	16.00	17	32.00	34.00	27	52.00	54.00	37	72.00	74.00
09	16.00	18.00	18	34.00	36.00	28	54.00	56.00	38	74.00	76.00
10	18.00	20.00	19	36.00	38.00	29	56.00	58.00	39	76.00	78.00
			20	38.00	40.00	30	58.00	60.00	40	78.00	80.00

Ordering Information

GPFA2	<input type="checkbox"/> <input type="checkbox"/>	-	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	R1BA
	Height Option (H)		No. of Pins per Row	Standard Plating	Pin Length (A/B/E)	
	<input type="checkbox"/> 03 : H=2.00		<input type="checkbox"/> 02	<input type="checkbox"/> 02 : Gold Flash	<input type="checkbox"/> 007 : A=4.00 / B=2.80 / E=7.00	
	<input type="checkbox"/> 04 : H=1.50		<input type="checkbox"/> ?	GPFA203...A	<input type="checkbox"/> 015 : A=3.20 / B=2.60 / E=3.00	
			<input type="checkbox"/> 40	GPFA204...A		
				Selective Plating		
				<input type="checkbox"/> 01 : Tin		
				<input type="checkbox"/> 05 : Gold Flash / Tin		

Standard Packaging : Box

For special length requirement
Please contact our sales personnel

Pin Header

pitch 2.00mm (0.079") | Dual row | Dip

GPFA212
GPFA216 Series


Specifications

Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C






Materials

Contact Material :	Brass
Insulation Material :	High Temperature Thermoplastic, 94V-0 Nylon

All materials must meet Greenconn's requirements for environmental protection.

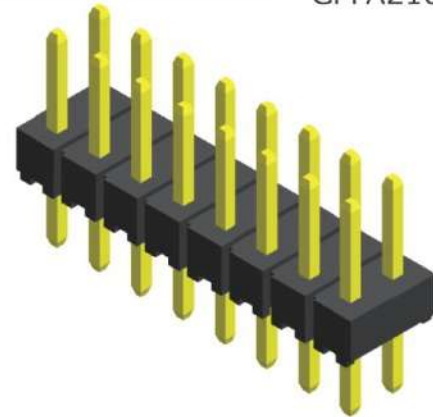

Mating with

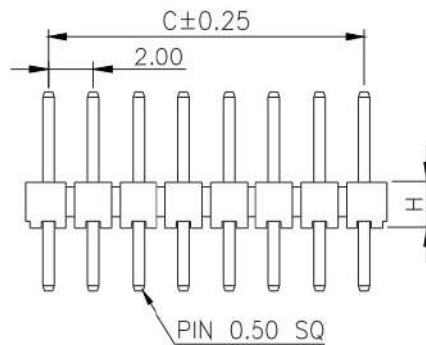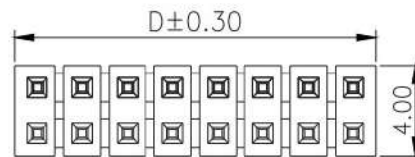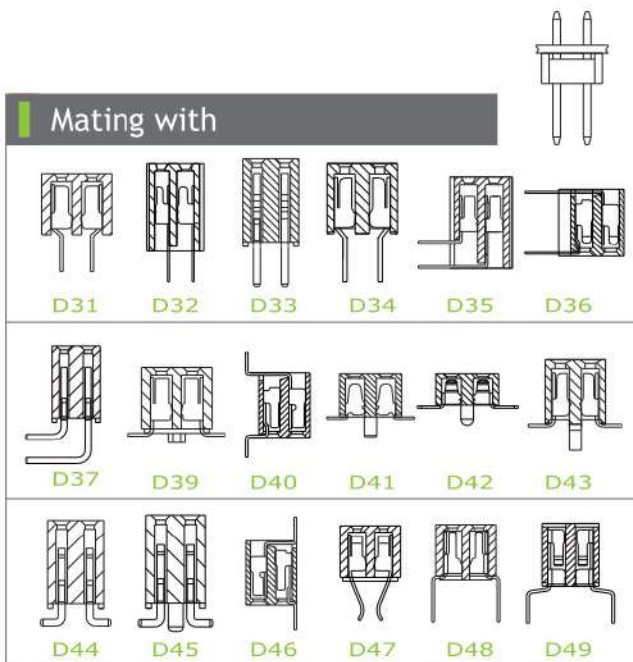

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	C	D		C	D		C	D		C	D
02	2.00	4.00	11	20.00	22.00	21	40.00	42.00	31	60.00	62.00
03	4.00	6.00	12	22.00	24.00	22	42.00	44.00	32	62.00	64.00
04	6.00	8.00	13	24.00	26.00	23	44.00	46.00	33	64.00	66.00
05	8.00	10.00	14	26.00	28.00	24	46.00	48.00	34	66.00	68.00
06	10.00	12.00	15	28.00	30.00	25	48.00	50.00	35	68.00	70.00
07	12.00	14.00	16	30.00	32.00	26	50.00	52.00	36	70.00	72.00
08	14.00	16.00	17	32.00	34.00	27	52.00	54.00	37	72.00	74.00
09	16.00	18.00	18	34.00	36.00	28	54.00	56.00	38	74.00	76.00
10	18.00	20.00	19	36.00	38.00	29	56.00	58.00	39	76.00	78.00
			20	38.00	40.00	30	58.00	60.00	40	78.00	80.00

Ordering Information

GPFA2	<input type="checkbox"/> <input type="checkbox"/>	-	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	R1BA
	Height Option (H)		No. of Pins per Row	Standard Plating	Pin Length (A/B)	
	<input type="checkbox"/> 12 : H=2.00		<input type="checkbox"/> 02	<input type="checkbox"/> 02 : Gold Flash	<input type="checkbox"/> 007 : A=4.00 / B=2.80	
	<input type="checkbox"/> 16 : H=1.50		<input type="checkbox"/> ?	Selective Plating	<input type="checkbox"/> 015 : A=1.65 / B=2.30	
			<input type="checkbox"/> 40	<input type="checkbox"/> 01 : Tin	For special length requirement Please contact our sales personnel	
				<input type="checkbox"/> 05 : Gold Flash / Tin		

Pin Header

pitch 2.00mm (0.079") | Dual row | Dip

GPFA215 Series



Specifications

Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C




Materials

Contact Material :	Brass
Insulation Material :	High Temperature Thermoplastic, 94V-0 Nylon

All materials must meet Greenconn's requirements for environmental protection.

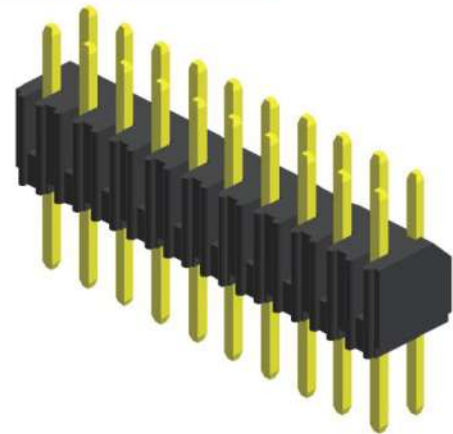

Mating with

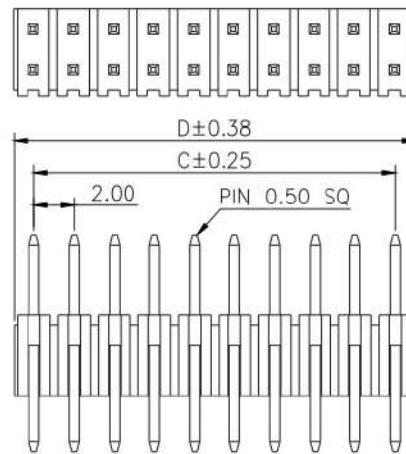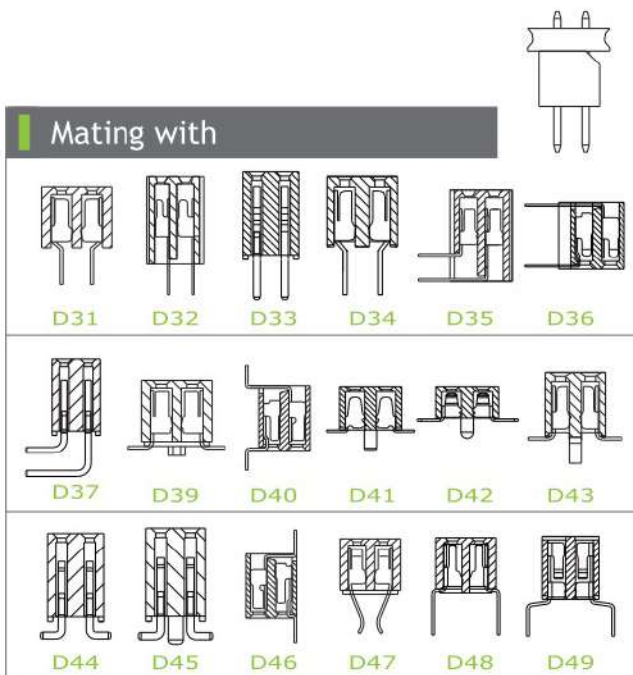

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	C	D		C	D		C	D		C	D
			11	20.00	22.00	21	40.00	42.00	31	60.00	62.00
			12	22.00	24.00	22	42.00	44.00	32	62.00	64.00
03	4.00	6.00	13	24.00	26.00	23	44.00	46.00	33	64.00	66.00
04	6.00	8.00	14	26.00	28.00	24	46.00	48.00	34	66.00	68.00
05	8.00	10.00	15	28.00	30.00	25	48.00	50.00	35	68.00	70.00
06	10.00	12.00	16	30.00	32.00	26	50.00	52.00	36	70.00	72.00
07	12.00	14.00	17	32.00	34.00	27	52.00	54.00	37	72.00	74.00
08	14.00	16.00	18	34.00	36.00	28	54.00	56.00	38	74.00	76.00
09	16.00	18.00	19	36.00	38.00	29	56.00	58.00	39	76.00	78.00
10	18.00	20.00	20	38.00	40.00	30	58.00	60.00	40	78.00	80.00

Ordering Information

GPFA2	<input type="checkbox"/> <input checked="" type="checkbox"/>	-	<input type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/> <input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	R1BA
	Height Option (H)		No. of Pins per Row	Standard Plating		Pin Length (A/B)	
	<input type="checkbox"/> <input checked="" type="checkbox"/>		<input type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/> <input checked="" type="checkbox"/> : Gold Flash		<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> : A=4.00 / B=2.80	
	<input type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/>		<input type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> : Tin		<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> : A=3.00 / B=3.00	
	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/>		<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> : Gold Flash / Tin		For special length requirement Please contact our sales personnel	

Pin Header

pitch 2.00mm (0.079") | Dual row | R/A

GPFB201
GPFB202 Series


Specifications

Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C





Materials

Contact Material :	Brass
Insulation Material :	High Temperature Thermoplastic, 94V-0 Nylon

All materials must meet Greenconn's requirements for environmental protection.

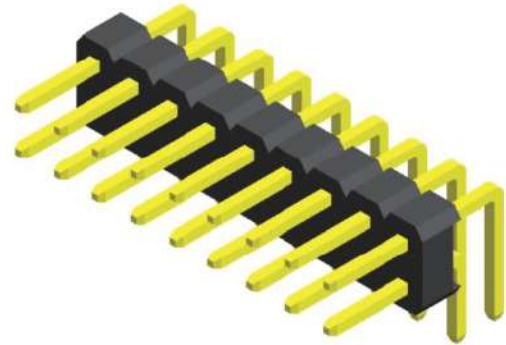

Mating with

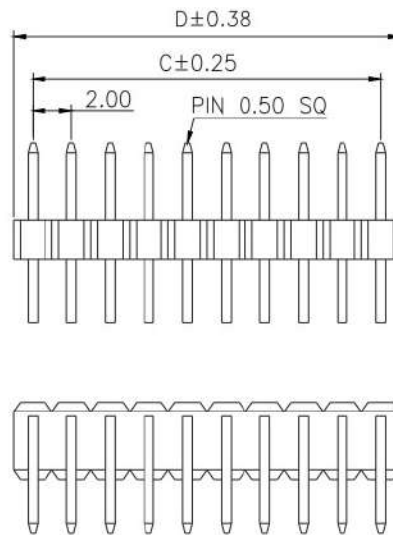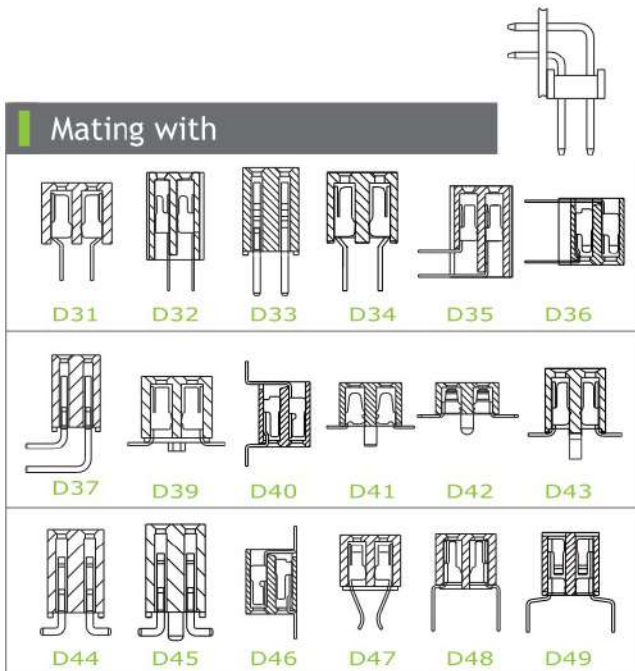

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	C	D		C	D		C	D		C	D
02	2.00	4.00	11	20.00	22.00	21	40.00	42.00	31	60.00	62.00
03	4.00	6.00	12	22.00	24.00	22	42.00	44.00	32	62.00	64.00
04	6.00	8.00	13	24.00	26.00	23	44.00	46.00	33	64.00	66.00
05	8.00	10.00	14	26.00	28.00	24	46.00	48.00	34	66.00	68.00
06	10.00	12.00	15	28.00	30.00	25	48.00	50.00	35	68.00	70.00
07	12.00	14.00	16	30.00	32.00	26	50.00	52.00	36	70.00	72.00
08	14.00	16.00	17	32.00	34.00	27	52.00	54.00	37	72.00	74.00
09	16.00	18.00	18	34.00	36.00	28	54.00	56.00	38	74.00	76.00
10	18.00	20.00	19	36.00	38.00	29	56.00	58.00	39	76.00	78.00
			20	38.00	40.00	30	58.00	60.00	40	78.00	80.00

Ordering Information

GPFB2	<input type="checkbox"/> <input checked="" type="checkbox"/>	-	<input type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/> <input checked="" type="checkbox"/>	R1BC
	Height Option (H)		No. of Pins per Row	Standard Plating		Pin Length (A/B/E)						
	<input type="checkbox"/> 01 : H=2.00		<input type="checkbox"/> 02	<input type="checkbox"/> 02 : Gold Flash	GPFB201...A	<input type="checkbox"/> 001 : A=4.00 / B=2.80 / E=3.05						
	<input type="checkbox"/> 02 : H=1.50		<input type="checkbox"/> ?	Selective Plating	GPFB202...A	<input type="checkbox"/> 001 : A=3.50 / B=3.00 / E=3.00						
			<input type="checkbox"/> 40	<input type="checkbox"/> 01 : Tin								
				<input type="checkbox"/> 05 : Gold Flash / Tin								

For special length requirement
Please contact our sales personnel

Pin Header

pitch 2.00mm (0.079") | Dual row | R/A | Board spacer

GPFB203 Series

Specifications

Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C





Materials

Contact Material :	Brass
Insulation Material :	High Temperature Thermoplastic, 94V-0 Nylon

All materials must meet Greenconn's requirements for environmental protection.



Mating with

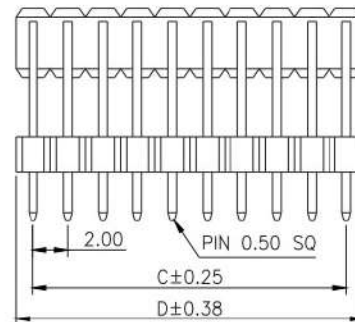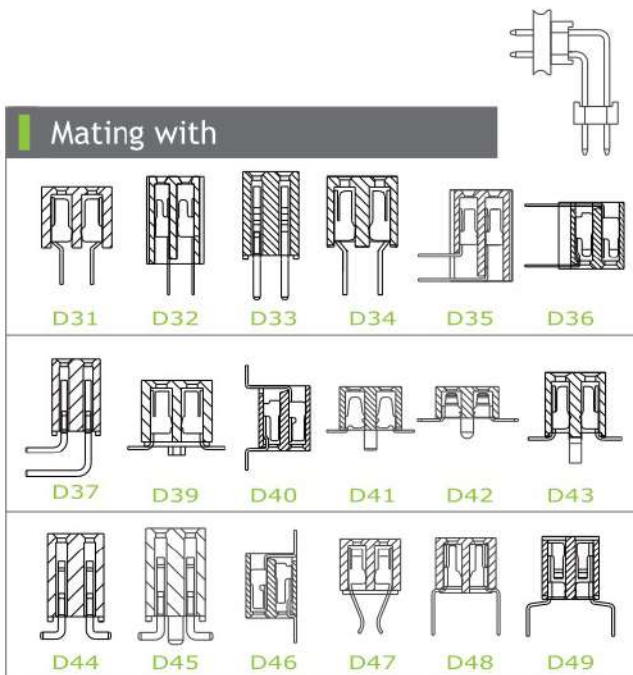

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	C	D		C	D		C	D		C	D
02	2.00	4.00	11	20.00	22.00	21	40.00	42.00	31	60.00	62.00
03	4.00	6.00	12	22.00	24.00	22	42.00	44.00	32	62.00	64.00
04	6.00	8.00	13	24.00	26.00	23	44.00	46.00	33	64.00	66.00
05	8.00	10.00	14	26.00	28.00	24	46.00	48.00	34	66.00	68.00
06	10.00	12.00	15	28.00	30.00	25	48.00	50.00	35	68.00	70.00
07	12.00	14.00	16	30.00	32.00	26	50.00	52.00	36	70.00	72.00
08	14.00	16.00	17	32.00	34.00	27	52.00	54.00	37	72.00	74.00
09	16.00	18.00	18	34.00	36.00	28	54.00	56.00	38	74.00	76.00
10	18.00	20.00	19	36.00	38.00	29	56.00	58.00	39	76.00	78.00
			20	38.00	40.00	30	58.00	60.00	40	78.00	80.00

Ordering Information

GPFB2	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	-	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	R1BC
	Height Option (H)		No. of Pins per Row	Standard Plating	Pin Length (A/B/E/F)	
	<input type="checkbox"/> <input type="checkbox"/>		<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> : Gold Flash	<input type="checkbox"/> : A=6.10/B=3.00/E=6.10/F=4.40	
	<input type="checkbox"/> <input type="checkbox"/>		<input type="checkbox"/> <input type="checkbox"/>	Selective Plating	<input type="checkbox"/> : A=7.00/B=3.00/E=8.00/F=3.00	
	<input type="checkbox"/> <input type="checkbox"/>		<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> : Tin	For special length requirement	
	<input type="checkbox"/> <input type="checkbox"/>		<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> : Gold Flash / Tin	Please contact our sales personnel	

Pin Header

pitch 2.00mm (0.079") | Dual row | R/A

GPFB215 Series

Specifications

Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C






Materials

Contact Material :	Brass
Insulation Material :	High Temperature Thermoplastic, 94V-0 Nylon

All materials must meet Greenconn's requirements for environmental protection.



Mating with

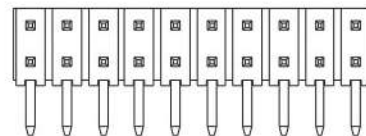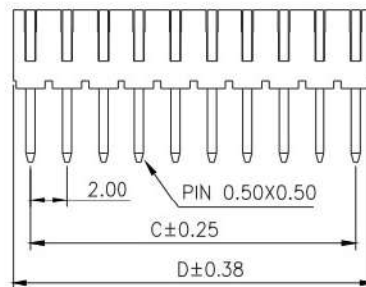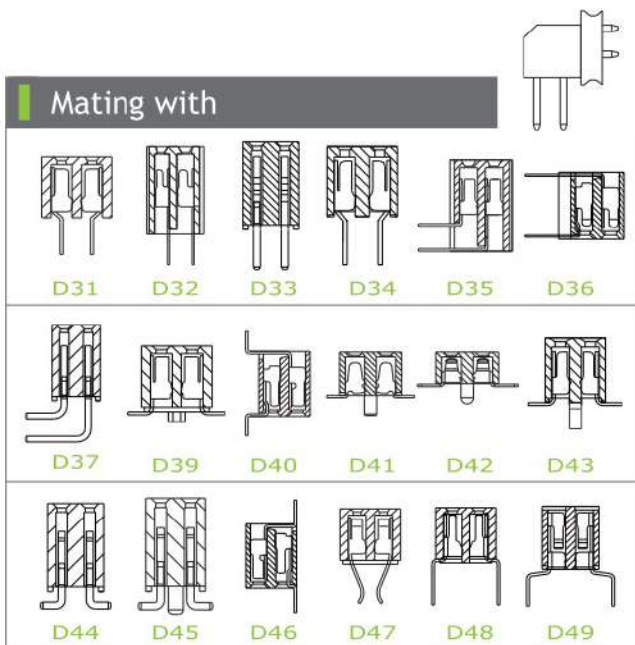

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	C	D		C	D		C	D		C	D
03	4.00	6.00	11	20.00	22.00	21	40.00	42.00	31	60.00	62.00
04	6.00	8.00	12	22.00	24.00	22	42.00	44.00	32	62.00	64.00
05	8.00	10.00	13	24.00	26.00	23	44.00	46.00	33	64.00	66.00
06	10.00	12.00	14	26.00	28.00	24	46.00	48.00	34	66.00	68.00
07	12.00	14.00	15	28.00	30.00	25	48.00	50.00	35	68.00	70.00
08	14.00	16.00	16	30.00	32.00	26	50.00	52.00	36	70.00	72.00
09	16.00	18.00	17	32.00	34.00	27	52.00	54.00	37	72.00	74.00
10	18.00	20.00	18	34.00	36.00	28	54.00	56.00	38	74.00	76.00
			19	36.00	38.00	29	56.00	58.00	39	76.00	78.00
			20	38.00	40.00	30	58.00	60.00	40	78.00	80.00

Ordering Information

GPFB2	<input type="checkbox"/> <input checked="" type="checkbox"/>	-	<input type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/> <input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input checked="" type="checkbox"/>	R1BC
	Height Option (H)		No. of Pins per Row	Standard Plating		Pin Length (A/B)		
	<input type="checkbox"/> <input checked="" type="checkbox"/>		<input type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/> <input checked="" type="checkbox"/> : Gold Flash		<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> : A=4.00 / B=2.80		
	<input type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/>		<input type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/>	Selective Plating		<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> : A=3.00 / B=3.00		
	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/>		<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/> : Tin		For special length requirement		
	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/>		<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/> : Gold Flash / Tin		Please contact our sales personnel		

Pin Header

pitch 2.00mm (0.079") | Dual row | S.M.T. | Locating peg

GPFC217 Series


Specifications

Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C





Materials

Contact Material :	Brass
Insulation Material :	High Temperature Thermoplastic, 94V-0 Nylon

All materials must meet Greenconn's requirements for environmental protection.

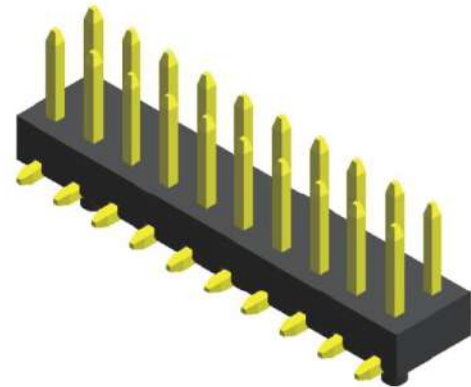

Mating with

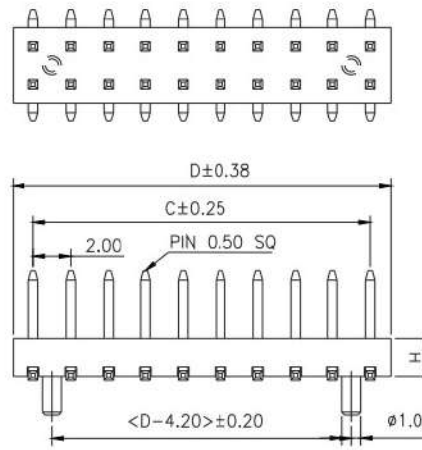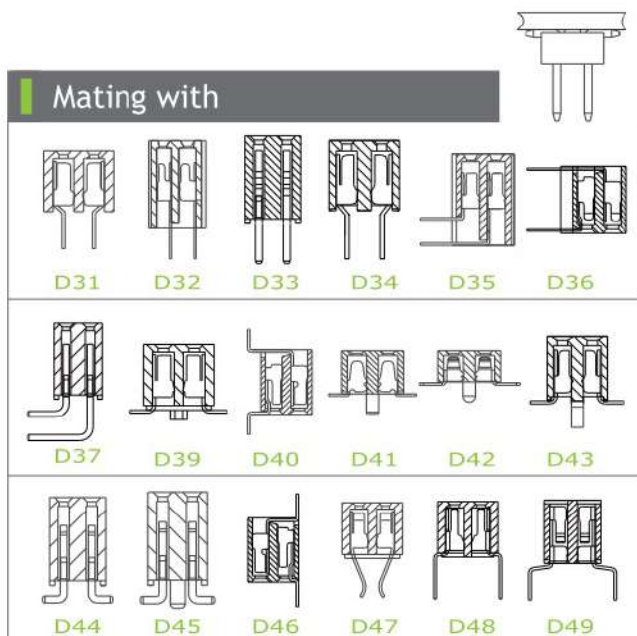

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	C	D		C	D		C	D		C	D
03	4.00	6.20	11	20.00	22.20	21	40.00	42.20	31	60.00	62.20
04	6.00	8.20	12	22.00	24.20	22	42.00	44.20	32	62.00	64.20
05	8.00	10.20	13	24.00	26.20	23	44.00	46.20	33	64.00	66.20
06	10.00	12.20	14	26.00	28.20	24	46.00	48.20	34	66.00	68.20
07	12.00	14.20	15	28.00	30.20	25	48.00	50.20	35	68.00	70.20
08	14.00	16.20	16	30.00	32.20	26	50.00	52.20	36	70.00	72.20
09	16.00	18.20	17	32.00	34.20	27	52.00	54.20	37	72.00	74.20
10	18.00	20.20	18	34.00	36.20	28	54.00	56.20	38	74.00	76.20
			19	36.00	38.20	29	56.00	58.20	39	76.00	78.20
			20	38.00	40.20	30	58.00	60.20	40	78.00	80.20

Ordering Information

GPFC2

Height Option (H)

: H=2.00

-

No. of Pins per Row

?

Standard Plating

: Gold Flash

Selective Plating

: Tin

: Gold Flash / Tin

Standard Packaging : Tube

R1BC

Pin Length (A/B/W)

: A=3.50 / B=2.20 / W=6.50

For special length requirement
Please contact our sales personnel

Pin Header

pitch 2.00mm (0.079") | Dual row | S.M.T. | Board spacer | Locating peg

GPFC219 Series


Specifications

Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C



Materials

Contact Material :	Brass
Insulation Material :	High Temperature Thermoplastic, 94V-0 Nylon

All materials must meet Greenconn's requirements for environmental protection.

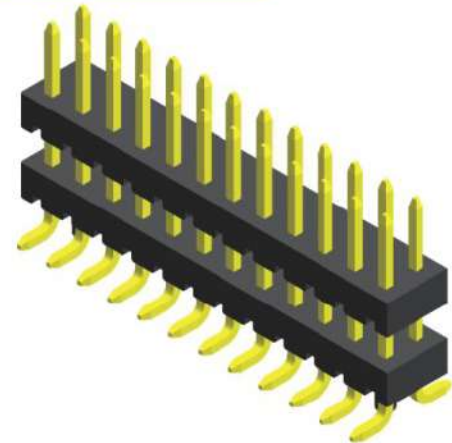

Mating with

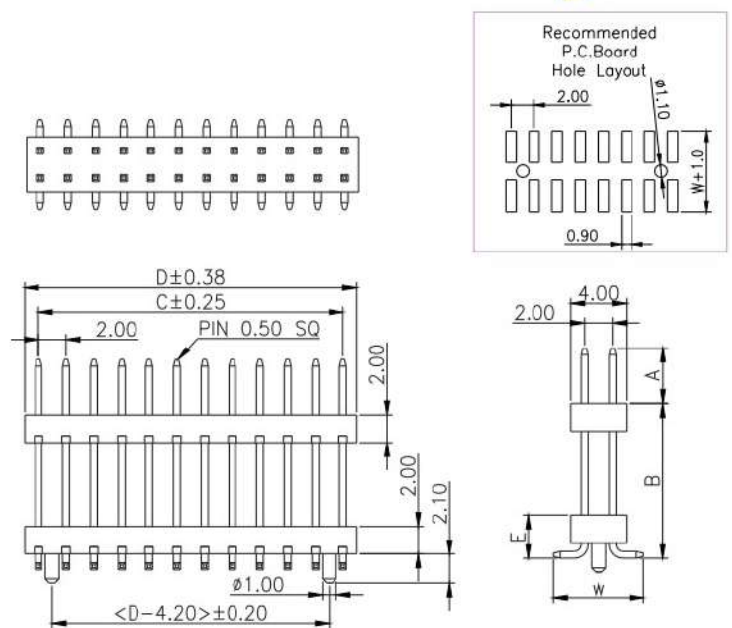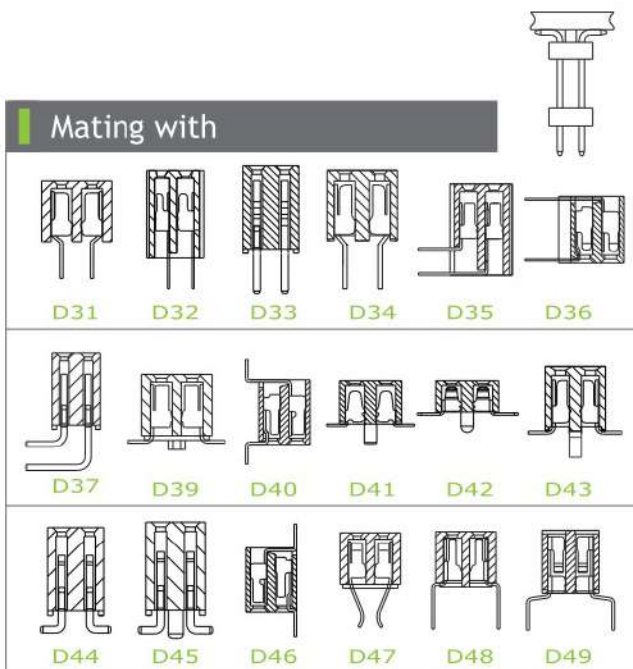

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	C	D		C	D		C	D		C	D
03	4.00	6.20	11	20.00	22.20	21	40.00	42.20	31	60.00	62.20
04	6.00	8.20	12	22.00	24.20	22	42.00	44.20	32	62.00	64.20
05	8.00	10.20	13	24.00	26.20	23	44.00	46.20	33	64.00	66.20
06	10.00	12.20	14	26.00	28.20	24	46.00	48.20	34	66.00	68.20
07	12.00	14.20	15	28.00	30.20	25	48.00	50.20	35	68.00	70.20
08	14.00	16.20	16	30.00	32.20	26	50.00	52.20	36	70.00	72.20
09	16.00	18.20	17	32.00	34.20	27	52.00	54.20	37	72.00	74.20
10	18.00	20.20	18	34.00	36.20	28	54.00	56.20	38	74.00	76.20
			19	36.00	38.20	29	56.00	58.20	39	76.00	78.20
			20	38.00	40.20	30	58.00	60.20	40	78.00	80.20

Ordering Information

GPFC2	<input type="checkbox"/> <input checked="" type="checkbox"/>	-	<input type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/> <input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	R1BC
	Height Option (H)		No. of Pins per Row	Standard Plating		Pin Length (A/B/E/W)		
	<input type="checkbox"/> <input checked="" type="checkbox"/>		<input type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> : Gold Flash		<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> : A=4.00/B=4.60/E=2.60/W=6.50		
	<input type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/>		<input type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/>	Selective Plating		<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> : A=4.00/B=16.0/E=3.15/W=6.50		
	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/>		<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> : Tin		For special length requirement Please contact our sales personnel		
	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/>		<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> : Gold Flash / Tin				

Pin Header

pitch 2.00mm (0.079") | Dual row | S.M.T.

GPFD201 Series

Specifications

Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C



Materials

Contact Material :	Brass
Insulation Material :	High Temperature Thermoplastic, 94V-0 Nylon

All materials must meet Greenconn's requirements for environmental protection.



Mating with

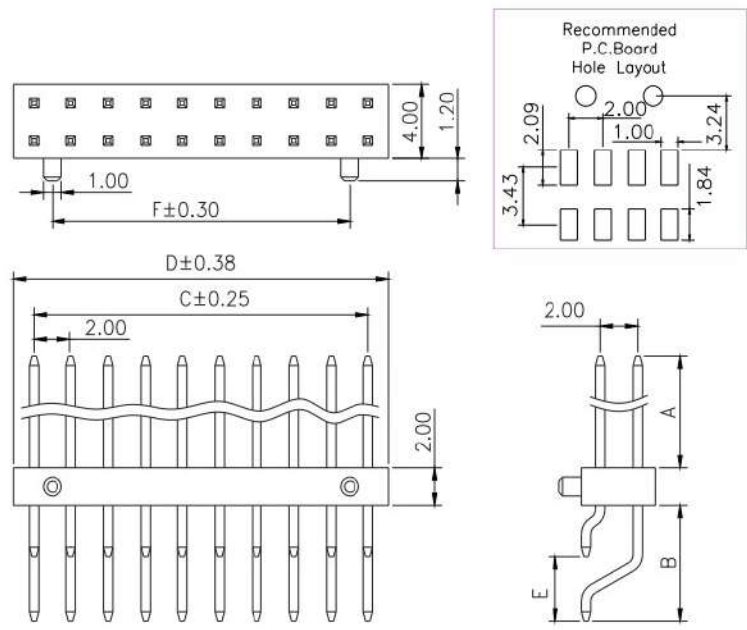

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	C	D	F		C	D	F		C	D	F
03	4.00	6.20	2.00	11	20.00	22.20	18.00	21	40.00	42.20	38.00
04	6.00	8.20	4.00	12	22.00	24.20	20.00	22	42.00	44.20	40.00
05	8.00	10.20	6.00	13	24.00	26.20	22.00	23	44.00	46.20	42.00
06	10.00	12.20	8.00	14	26.00	28.20	24.00	24	46.00	48.20	44.00
07	12.00	14.20	10.00	15	28.00	30.20	26.00	25	48.00	50.20	46.00
08	14.00	16.20	12.00	16	30.00	32.20	28.00				
09	16.00	18.20	14.00	17	32.00	34.20	30.00				
10	18.00	20.20	16.00	18	34.00	36.20	32.00				
				19	36.00	38.20	34.00				
				20	38.00	40.20	36.00				

Ordering Information

GPFD2	<input type="checkbox"/> <input type="checkbox"/>	-	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	R1BC
	Height Option (H)		No. of Pins per Row	Standard Plating	Pin Length (A/B/E)	
	<input type="checkbox"/> 01		<input type="checkbox"/> 03	<input type="checkbox"/> 02 : Gold Flash	<input type="checkbox"/> 700 : A=4.00 / B=6.22 / E=3.43	
			<input type="checkbox"/> 25	Selective Plating		
				<input type="checkbox"/> 01 : Tin		
				<input type="checkbox"/> 05 : Gold Flash / Tin		

For special length requirement Please contact our sales personnel

Pin Header

pitch 2.00mm (0.079") | Triple row | Dip | Board spacer

GPFA305 Series


Specifications

Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C


Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 LCP

All materials must meet Greenconn's requirements for environmental protection.


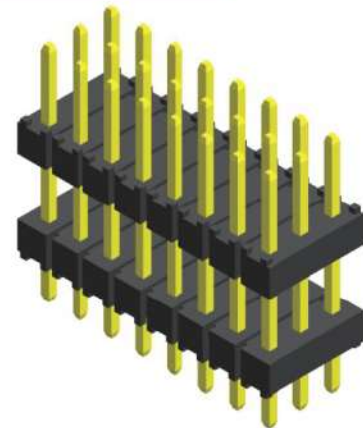


Mating with





D50

D51

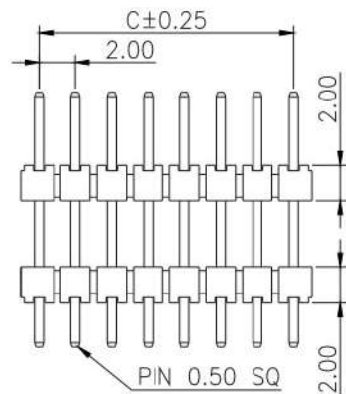

Recommended P.C.Board Layout



* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	C	D		C	D		C	D		C	D
02	2.00	4.00	11	20.00	22.00	21	40.00	42.00	31	60.00	62.00
03	4.00	6.00	12	22.00	24.00	22	42.00	44.00	32	62.00	64.00
04	6.00	8.00	13	24.00	26.00	23	44.00	46.00	33	64.00	66.00
05	8.00	10.00	14	26.00	28.00	24	46.00	48.00	34	66.00	68.00
06	10.00	12.00	15	28.00	30.00	25	48.00	50.00	35	68.00	70.00
07	12.00	14.00	16	30.00	32.00	26	50.00	52.00	36	70.00	72.00
08	14.00	16.00	17	32.00	34.00	27	52.00	54.00	37	72.00	74.00
09	16.00	18.00	18	34.00	36.00	28	54.00	56.00	38	74.00	76.00
10	18.00	20.00	19	36.00	38.00	29	56.00	58.00	39	76.00	78.00
			20	38.00	40.00	30	58.00	60.00	40	78.00	80.00

Ordering Information

GPFA3

Height Option (H)

05

-

No. of Pins per Row

02

?

40

Standard Plating

02 : Gold Flash

Selective Plating

01 : Tin

05 : Gold Flash / Tin

Standard Packaging : Tube

C1BC

A Pin Length (A/B/E)

001 : A=4.00 / B=2.40 / E=7.60

For special length requirement
Please contact our sales personnel

Pin Header

pitch 2.00mm (0.079") | Triple row | R/A

GPFB301 Series


Specifications

Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C


Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 LCP

All materials must meet Greenconn's requirements for environmental protection.



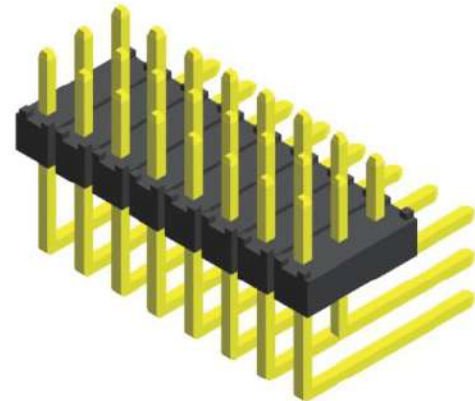


Mating with





D50

D51

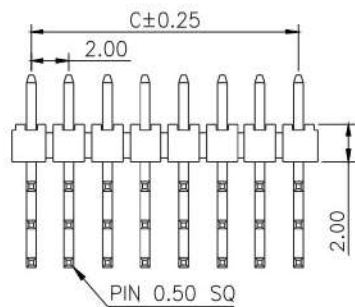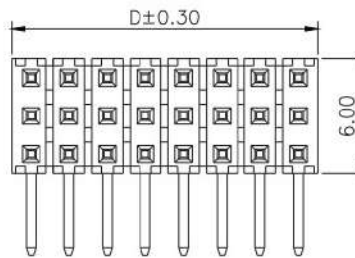

Recommended P.C.Board Layout



* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	C	D			C	D			C	D			C	D	
02	2.00	4.00		11	20.00	22.00		21	40.00	42.00		31	60.00	62.00	
03	4.00	6.00		12	22.00	24.00		22	42.00	44.00		32	62.00	64.00	
04	6.00	8.00		13	24.00	26.00		23	44.00	46.00		33	64.00	66.00	
05	8.00	10.00		14	26.00	28.00		24	46.00	48.00		34	66.00	68.00	
06	10.00	12.00		15	28.00	30.00		25	48.00	50.00		35	68.00	70.00	
07	12.00	14.00		16	30.00	32.00		26	50.00	52.00		36	70.00	72.00	
08	14.00	16.00		17	32.00	34.00		27	52.00	54.00		37	72.00	74.00	
09	16.00	18.00		18	34.00	36.00		28	54.00	56.00		38	74.00	76.00	
10	18.00	20.00		19	36.00	38.00		29	56.00	58.00		39	76.00	78.00	
				20	38.00	40.00		30	58.00	60.00		40	78.00	80.00	

Ordering Information

GPFB3

Height Option (H)

01

-

No. of Pins per Row

02

?

40

Standard Plating

02 : Gold Flash

Selective Plating

01 : Tin

05 : Gold Flash / Tin

Standard Packaging : Tube

C1BC

A Pin Length (A/B/E)

001 : A=3.20 / B=2.60 / E=1.27

002 : A=4.00 / B=2.55 / E=1.27

For special length requirement
Please contact our sales personnel

Pin Header

pitch 2.00mm (0.079") | Four row | Dip

GPFA401 Series


Specifications

Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C


Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 Nylon




All materials must meet Greenconn's requirements for environmental protection.

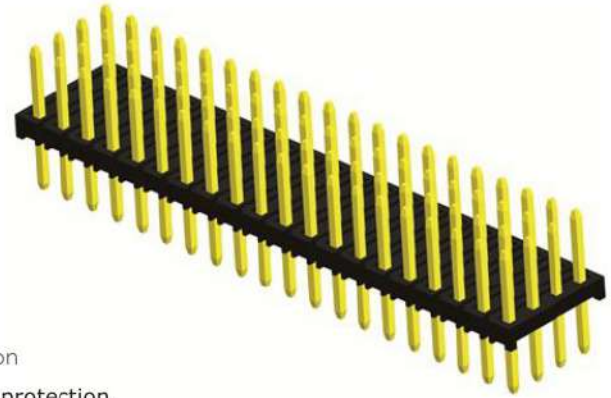

Mating with

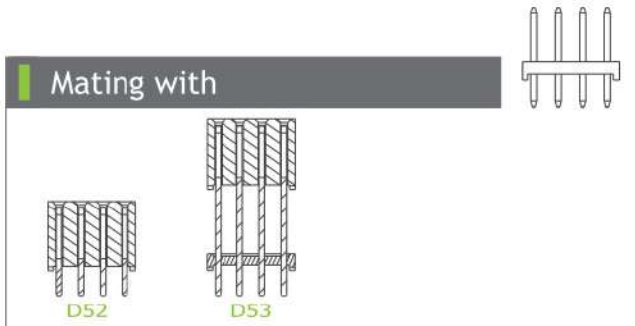

Recommended P.C.Board Layout

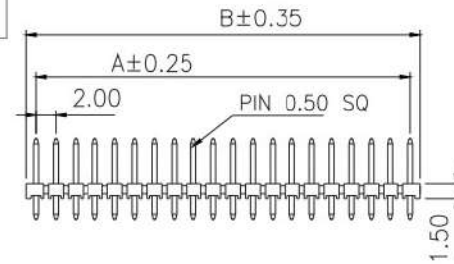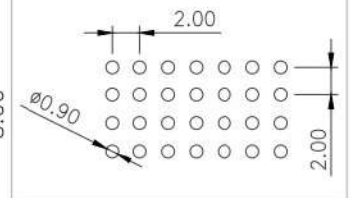

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	A	B		A	B		A	B		A	B
02	2.00	4.00	11	20.00	22.00	21	40.00	42.00	31	60.00	62.00
03	4.00	6.00	12	22.00	24.00	22	42.00	44.00	32	62.00	64.00
04	6.00	8.00	13	24.00	26.00	23	44.00	46.00	33	64.00	66.00
05	8.00	10.00	14	26.00	28.00	24	46.00	48.00	34	66.00	68.00
06	10.00	12.00	15	28.00	30.00	25	48.00	50.00	35	68.00	70.00
07	12.00	14.00	16	30.00	32.00	26	50.00	52.00	36	70.00	72.00
08	14.00	16.00	17	32.00	34.00	27	52.00	54.00	37	72.00	74.00
09	16.00	18.00	18	34.00	36.00	28	54.00	56.00	38	74.00	76.00
10	18.00	20.00	19	36.00	38.00	29	56.00	58.00	39	76.00	78.00
			20	38.00	40.00	30	58.00	60.00	40	78.00	80.00

Ordering Information

Standard Packaging : Box

GPFA4	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	-	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	A001R1AA
	Height Option (H)		No. of Pins per Row	Standard Plating	
	<input type="checkbox"/> 01		<input type="checkbox"/> 02	<input type="checkbox"/> 02 : Gold Flash	
			<input type="checkbox"/> ?	Selective Plating	
			<input type="checkbox"/> 40	<input type="checkbox"/> 01 : Tin	
				<input type="checkbox"/> 05 : Gold Flash / Tin	

Pin Header

pitch 2.00mm (0.079") | Four row | Dip | Board spacer

GPFA402 Series


Specifications

Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C

Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 Nylon


All materials must meet Greenconn's requirements for environmental protection.

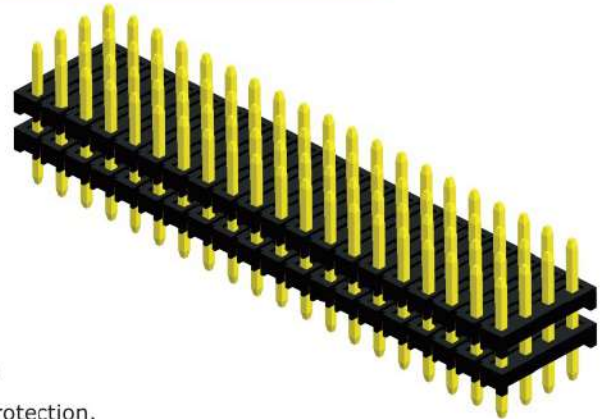





Mating with



D52



D53

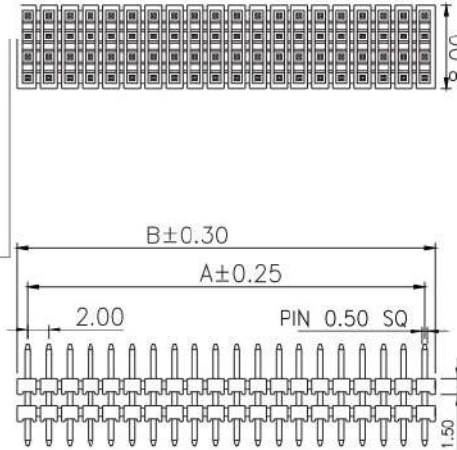

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	A	B		A	B		A	B		A	B
02	2.00	4.00	11	20.00	22.00	21	40.00	42.00	31	60.00	62.00
03	4.00	6.00	12	22.00	24.00	22	42.00	44.00	32	62.00	64.00
04	6.00	8.00	13	24.00	26.00	23	44.00	46.00	33	64.00	66.00
05	8.00	10.00	14	26.00	28.00	24	46.00	48.00	34	66.00	68.00
06	10.00	12.00	15	28.00	30.00	25	48.00	50.00	35	68.00	70.00
07	12.00	14.00	16	30.00	32.00	26	50.00	52.00	36	70.00	72.00
08	14.00	16.00	17	32.00	34.00	27	52.00	54.00	37	72.00	74.00
09	16.00	18.00	18	34.00	36.00	28	54.00	56.00	38	74.00	76.00
10	18.00	20.00	19	36.00	38.00	29	56.00	58.00	39	76.00	78.00
			20	38.00	40.00	30	58.00	60.00	40	78.00	80.00

Ordering Information

Standard Packaging : Box

GPFA4	<input type="checkbox"/> <input checked="" type="checkbox"/>	-	<input type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/> <input checked="" type="checkbox"/>	A002R1AA
	Height Option (H)		No. of Pins per Row	Standard Plating	
	<input type="checkbox"/> <input checked="" type="checkbox"/>		<input type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/> <input checked="" type="checkbox"/> : Gold Flash	
			<input type="checkbox"/> <input type="checkbox"/>	Selective Plating	
			<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> : Tin	
			<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> : Gold Flash / Tin	

Female Header

pitch 2.00mm (0.079") | Single row | Dip

CSFA101 Series


Specifications

Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C


Materials

Contact Material :	Brass
Insulation Material :	High Temperature Thermoplastic, 94V-0 Nylon




All materials must meet Greenconn's requirements for environmental protection.

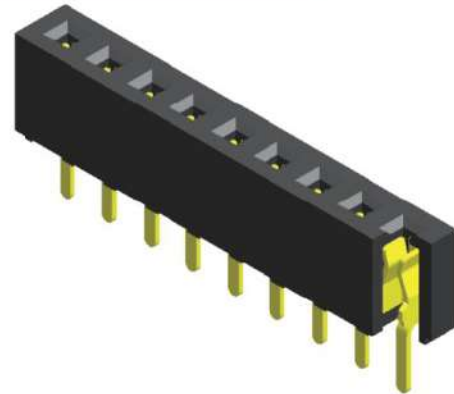

Mating with

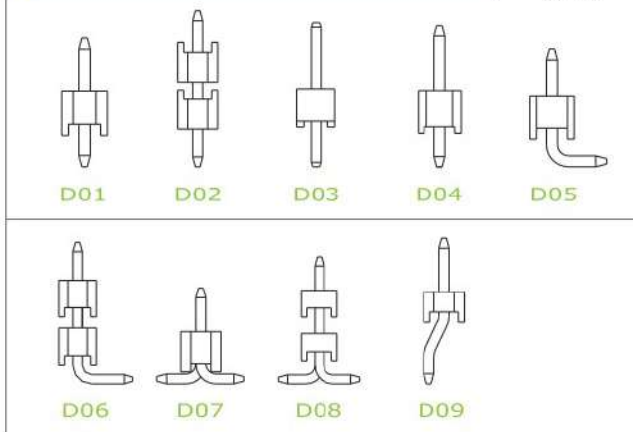

P.S. : Suggested mating pin length : 3.0 ~ 4.0 mm

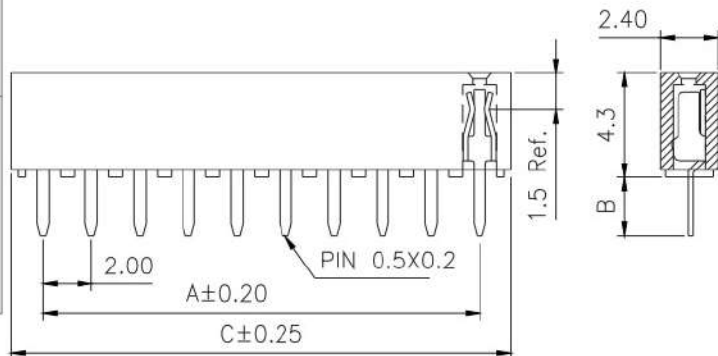

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	A	C		A	C		A	C		A	C
02	2.00	4.60	11	20.00	22.60	21	40.00	42.60	31	60.00	62.60
03	4.00	6.60	12	22.00	24.60	22	42.00	44.60	32	62.00	64.60
04	6.00	8.60	13	24.00	26.60	23	44.00	46.60	33	64.00	66.60
05	8.00	10.60	14	26.00	28.60	24	46.00	48.60	34	66.00	68.60
06	10.00	12.60	15	28.00	30.60	25	48.00	50.60	35	68.00	70.60
07	12.00	14.60	16	30.00	32.60	26	50.00	52.60	36	70.00	72.60
08	14.00	16.60	17	32.00	34.60	27	52.00	54.60	37	72.00	74.60
09	16.00	18.60	18	34.00	36.60	28	54.00	56.60	38	74.00	76.60
10	18.00	20.60	19	36.00	38.60	29	56.00	58.60	39	76.00	78.60
			20	38.00	40.60	30	58.00	60.60	40	78.00	80.60

Ordering Information

CSFA1	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	-	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	R1AA
	Height Option (H)		No. of Pins per Row	Standard Plating	Pin Length (B)	
	<input type="text" value="01"/>		<input type="text" value="02"/>	<input type="text" value="02"/> : Gold Flash	<input type="text" value="001"/> : B=2.40	
			<input type="text" value="40"/>	Selective Plating		
				<input type="text" value="01"/> : Tin		
				<input type="text" value="05"/> : Gold Flash / Tin		

For special length requirement Please contact our sales personnel

Female Header

pitch 2.00mm (0.079") | Single row | Dip

CSFA103 Series


Specifications

Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C


Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 Nylon




All materials must meet Greenconn's requirements for environmental protection

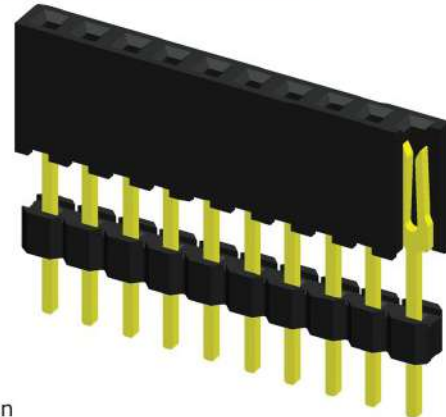

Mating with

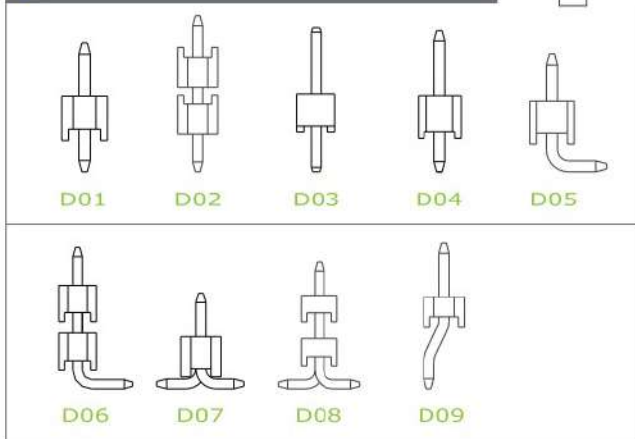

P.S. : Suggested mating pin length : 1.5 ~ 4.9 mm

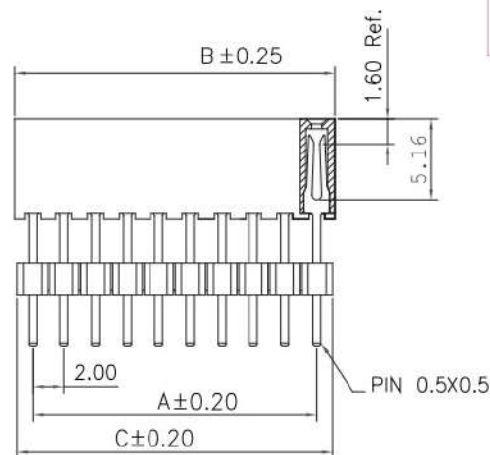

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	A	B	C		A	B	C		A	B	C		A	B	C
02	2.00	4.30	4.00	11	20.00	22.30	22.00	21	40.00	42.30	42.00	31	60.00	62.30	62.00
03	4.00	6.30	6.00	12	22.00	24.30	24.00	22	42.00	44.30	44.00	32	62.00	64.30	64.00
04	6.00	8.30	8.00	13	24.00	26.30	26.00	23	44.00	46.30	46.00	33	64.00	66.30	66.00
05	8.00	10.30	10.00	14	26.00	28.30	28.00	24	46.00	48.30	48.00	34	66.00	68.30	68.00
06	10.00	12.30	12.00	15	28.00	30.30	30.00	25	48.00	50.30	50.00	35	68.00	70.30	70.00
07	12.00	14.30	14.00	16	30.00	32.30	32.00	26	50.00	52.30	52.00	36	70.00	72.30	72.00
08	14.00	16.30	16.00	17	32.00	34.30	34.00	27	52.00	54.30	54.00	37	72.00	74.30	74.00
09	16.00	18.30	18.00	18	34.00	36.30	36.00	28	54.00	56.30	56.00	38	74.00	76.30	76.00
10	18.00	20.30	20.00	19	36.00	38.30	38.00	29	56.00	58.30	58.00	39	76.00	78.30	78.00
				20	38.00	40.30	40.00	30	58.00	60.30	60.00	40	78.00	80.30	80.00

Ordering Information

CSFA1

Height Option (H) Standard

: H=6.35

-

No. of Pins per Row

Standard Plating

: Gold Flash

Selective Plating

: Tin

: Gold Flash / Tin

Standard Packaging : Box

R1AA

Pin Length (D/E/F/G)

: D=11.2/E=3.20/F=2.00/G=6.35

: D=9.35/E=2.30/F=2.00/G=6.35

For special length requirement
Please contact our sales personnel

Female Header

pitch 2.00mm (0.079") | Single row | Dip

CSFA104 Series


Specifications

Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C


Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 LCP



All materials must meet Greenconn's requirements for environmental protection.

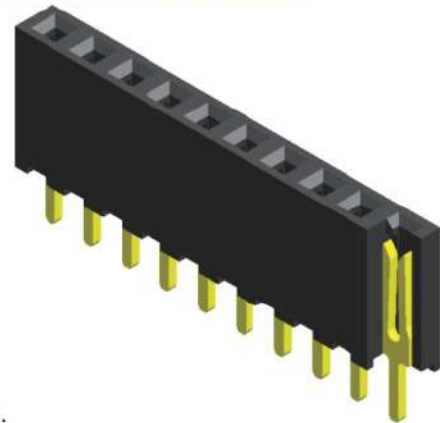

Mating with

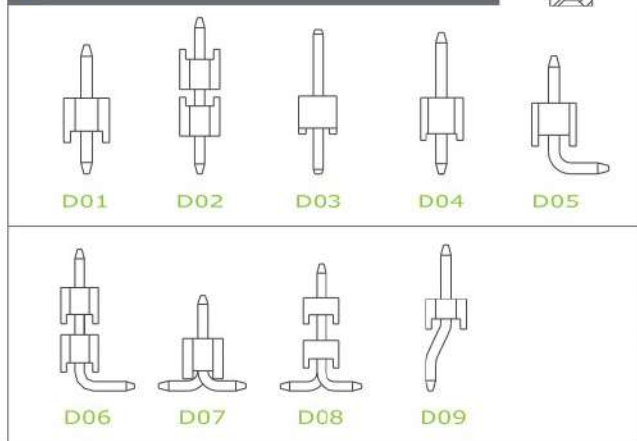

P.S. : Suggested mating pin length : 3.0 ~ 4.9 mm

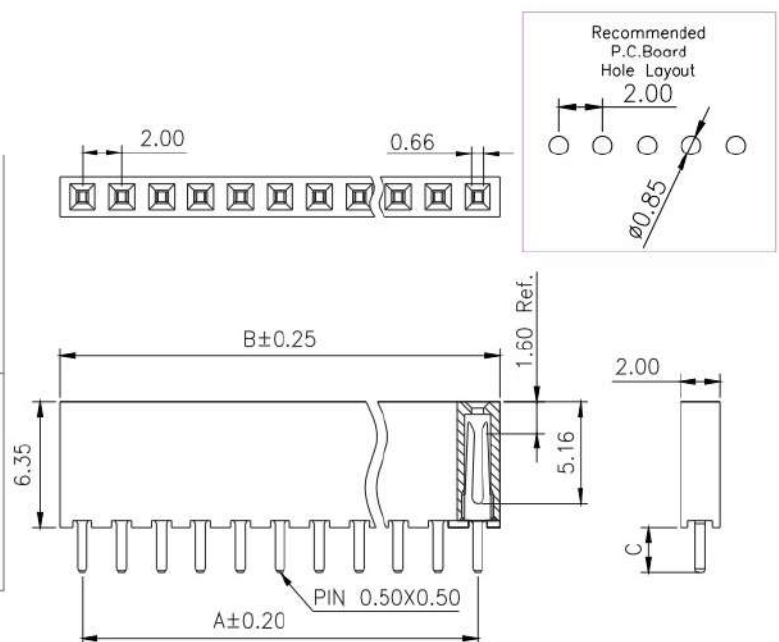

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	A	C		A	C		A	C		A	C
02	2.00	4.30	11	20.00	22.30	21	40.00	42.30	31	60.00	62.30
03	4.00	6.30	12	22.00	24.30	22	42.00	44.30	32	62.00	64.30
04	6.00	8.30	13	24.00	26.30	23	44.00	46.30	33	64.00	66.30
05	8.00	10.30	14	26.00	28.30	24	46.00	48.30	34	66.00	68.30
06	10.00	12.30	15	28.00	30.30	25	48.00	50.30	35	68.00	70.30
07	12.00	14.30	16	30.00	32.30	26	50.00	52.30	36	70.00	72.30
08	14.00	16.30	17	32.00	34.30	27	52.00	54.30	37	72.00	74.30
09	16.00	18.30	18	34.00	36.30	28	54.00	56.30	38	74.00	76.30
10	18.00	20.30	19	36.00	38.30	29	56.00	58.30	39	76.00	78.30
			20	38.00	40.30	30	58.00	60.30	40	78.00	80.30

Ordering Information

CSFA1	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>	-	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>	<input checked="" type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	C1AA
	Height Option (H)		No. of Pins per Row	Standard Plating		Pin Length (C)		
	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>		<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> : Gold Flash		<input type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/> : B=2.30		
	<input type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/>		<input type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/>	Selective Plating				
			<input type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> : Tin				
			<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/> : Gold Flash / Tin				

For special length requirement
Please contact our sales personnel

Female Header

pitch 2.00mm (0.079") | Single row | R/A

CSFB102 Series


Specifications

Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C


Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 Nylon

All materials must meet Greenconn's requirements for environmental protection.

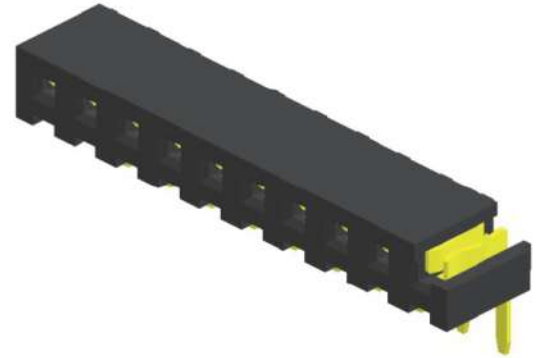

Mating with

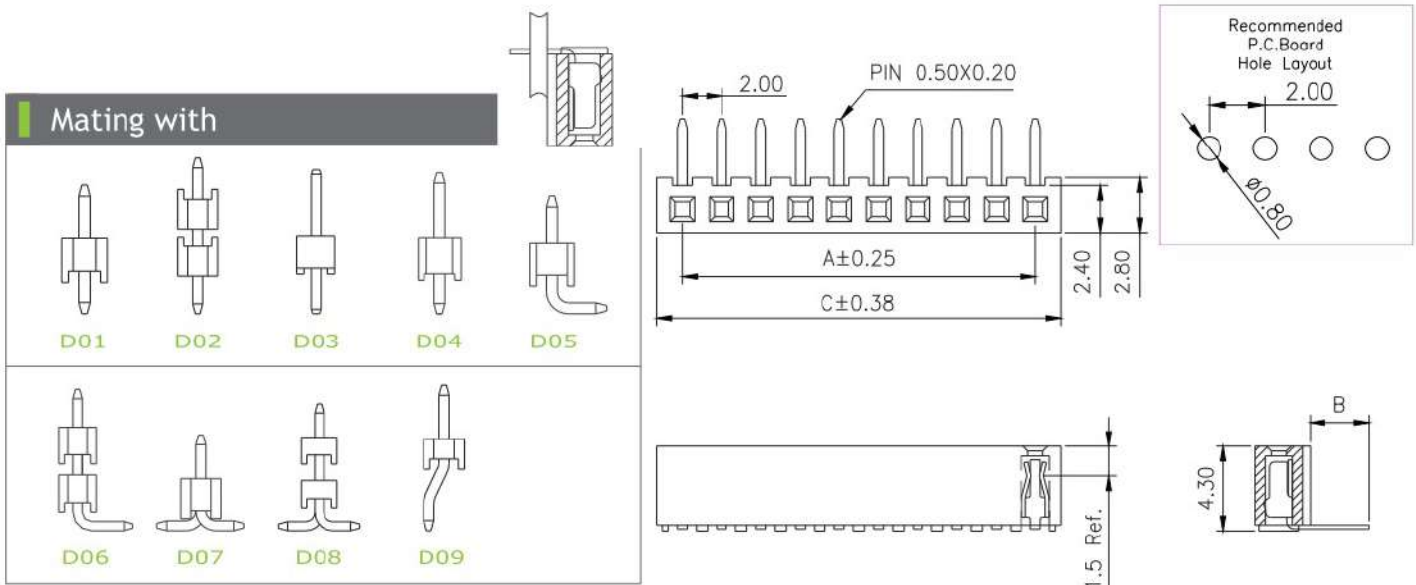

P.S. : Suggested mating pin length : 3.0 ~ 4.0 mm

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	A	C		A	C		A	C		A	C
02	2.00	4.60	11	20.00	22.60	21	40.00	42.60	31	60.00	62.60
03	4.00	6.60	12	22.00	24.60	22	42.00	44.60	32	62.00	64.60
04	6.00	8.60	13	24.00	26.60	23	44.00	46.60	33	64.00	66.60
05	8.00	10.60	14	26.00	28.60	24	46.00	48.60	34	66.00	68.60
06	10.00	12.60	15	28.00	30.60	25	48.00	50.60	35	68.00	70.60
07	12.00	14.60	16	30.00	32.60	26	50.00	52.60	36	70.00	72.60
08	14.00	16.60	17	32.00	34.60	27	52.00	54.60	37	72.00	74.60
09	16.00	18.60	18	34.00	36.60	28	54.00	56.60	38	74.00	76.60
10	18.00	20.60	19	36.00	38.60	29	56.00	58.60	39	76.00	78.60
			20	38.00	40.60	30	58.00	60.60	40	78.00	80.60

Ordering Information

Standard Packaging : Tube

CSFB1	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	-	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	R1AC
	Height Option (H)		No. of Pins per Row	Standard Plating	Pin Length (B)	
	<input type="checkbox"/> 02		<input type="checkbox"/> 02	<input type="checkbox"/> 02 : Gold Flash	<input type="checkbox"/> 001 : B=3.00	
			<input type="checkbox"/> 40	Selective Plating		
				<input type="checkbox"/> 01 : Tin		
				<input type="checkbox"/> 05 : Gold Flash / Tin		

For special length requirement
Please contact our sales personnel

Female Header

pitch 2.00mm (0.079") | Single row | R/A

CSFB107 Series


Specifications

Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C



Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 LCP

All materials must meet Greenconn's requirements for environmental protection.

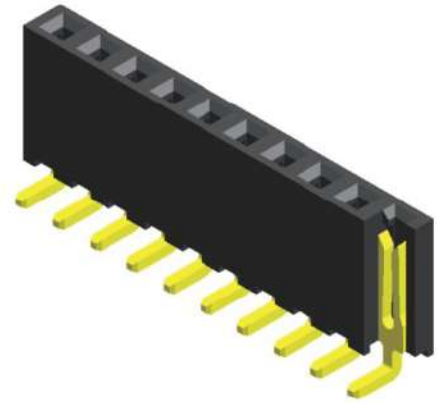

Mating with

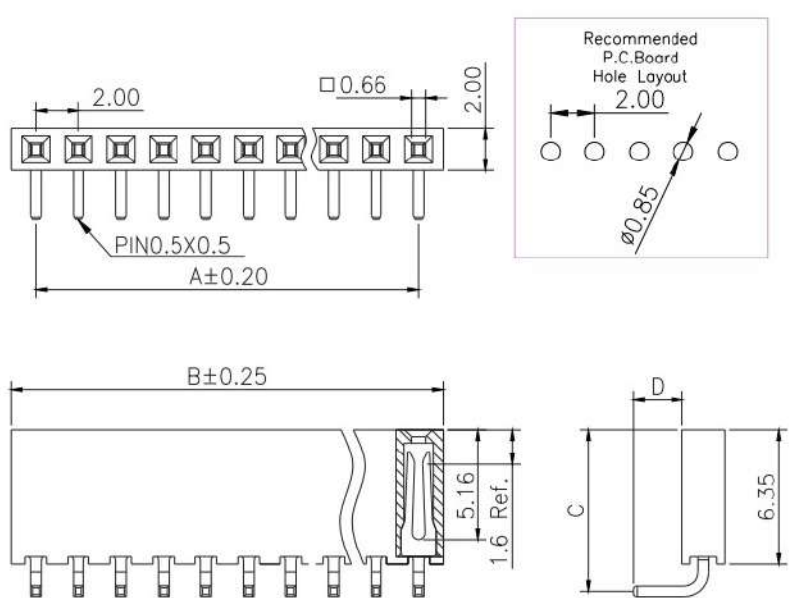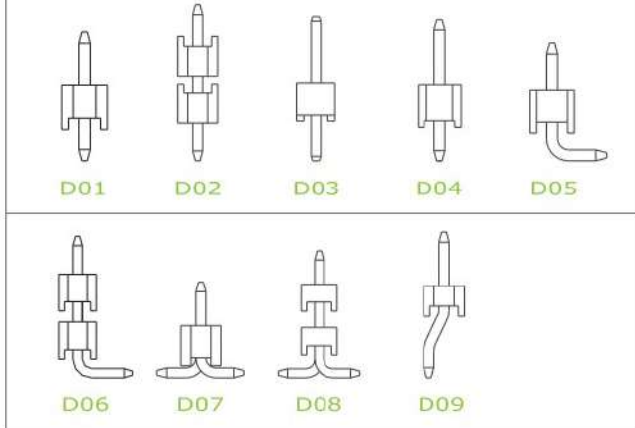

P.S. : Suggested mating pin length : 3.0 ~ 4.9 mm

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	A	B		A	B		A	B		A	B
02	2.00	4.30	11	20.00	22.30	21	40.00	42.30	31	60.00	62.30
03	4.00	6.30	12	22.00	24.30	22	42.00	44.30	32	62.00	64.30
04	6.00	8.30	13	24.00	26.30	23	44.00	46.30	33	64.00	66.30
05	8.00	10.30	14	26.00	28.30	24	46.00	48.30	34	66.00	68.30
06	10.00	12.30	15	28.00	30.30	25	48.00	50.30	35	68.00	70.30
07	12.00	14.30	16	30.00	32.30	26	50.00	52.30	36	70.00	72.30
08	14.00	16.30	17	32.00	34.30	27	52.00	54.30	37	72.00	74.30
09	16.00	18.30	18	34.00	36.30	28	54.00	56.30	38	74.00	76.30
10	18.00	20.30	19	36.00	38.30	29	56.00	58.30	39	76.00	78.30
			20	38.00	40.30	30	58.00	60.30	40	78.00	80.30

Ordering Information

CSFB1

Height Option (H)

-

No. of Pins per Row

Standard Plating

: Gold Flash

Selective Plating

: Tin

: Gold Flash / Tin

Standard Packaging : Tube

Pin Length (C/D)

: C=7.60 / D=2.30

C1AC

For special length requirement
Please contact our sales personnel

Female Header

pitch 2.00mm (0.079") | Single row | S.M.T.

CSFC101 Series

Specifications

Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C


Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 Nylon


All materials must meet Greenconn's requirements for environmental protection.



Mating with

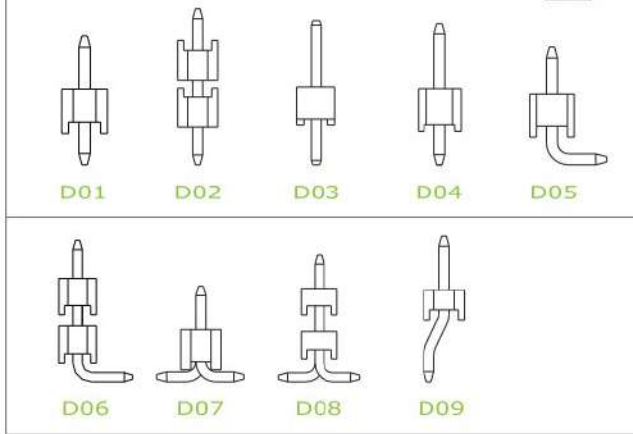

P.S. : Suggested mating pin length : 2.5 ~ 4.0 mm

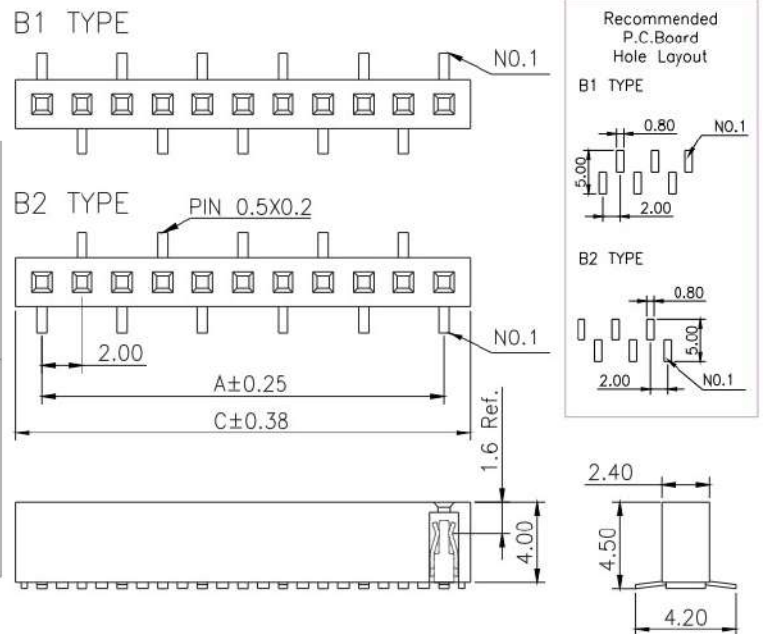

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	A	C		A	C		A	C		A	C
03	4.00	6.60	11	20.00	22.60	21	40.00	42.60	31	60.00	62.60
04	6.00	8.60	12	22.00	24.60	22	42.00	44.60	32	62.00	64.60
05	8.00	10.60	13	24.00	26.60	23	44.00	46.60	33	64.00	66.60
06	10.00	12.60	14	26.00	28.60	24	46.00	48.60	34	66.00	68.60
07	12.00	14.60	15	28.00	30.60	25	48.00	50.60	35	68.00	70.60
08	14.00	16.60	16	30.00	32.60	26	50.00	52.60	36	70.00	72.60
09	16.00	18.60	17	32.00	34.60	27	52.00	54.60	37	72.00	74.60
10	18.00	20.60	18	34.00	36.60	28	54.00	56.60	38	74.00	76.60
			19	36.00	38.60	29	56.00	58.60	39	76.00	78.60
			20	38.00	40.60	30	58.00	60.60	40	78.00	80.60

Ordering Information

CSFC1

Height Option (H)

01

-

No. of Pins per Row

03

?

40

Standard Plating

02 : Gold Flash

Selective Plating

01 : Tin

05 : Gold Flash / Tin

Standard Packaging : Tube

R1AC

A Pin Type

005 : B2 Type

006 : B1 Type

For special length requirement
Please contact our sales personnel

Female Header

pitch 2.00mm (0.079") | Single row | Dip

CSFF101 Series


Specifications

Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C


Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 Nylon


All materials must meet Greenconn's requirements for environmental protection.

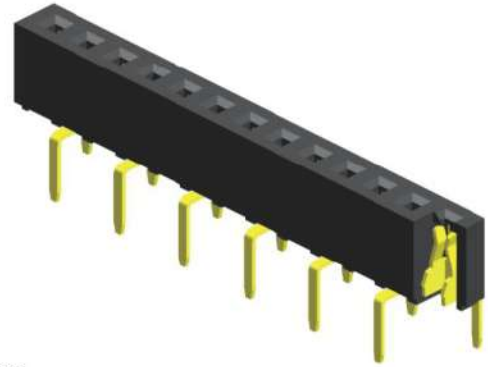


Mating with

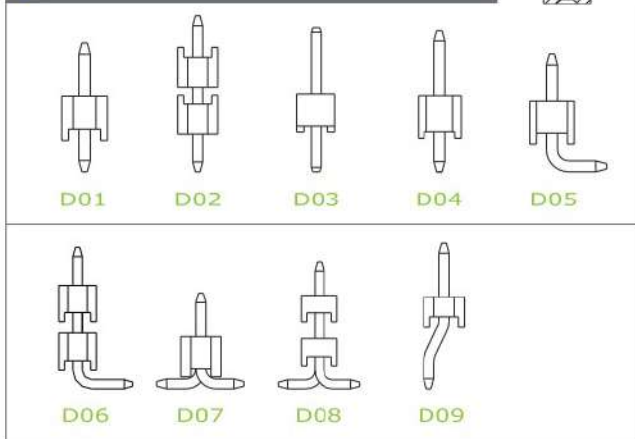




P.S. : Suggested mating pin length : 2.5 ~ 4.0 mm



B1 TYPE



B2 TYPE

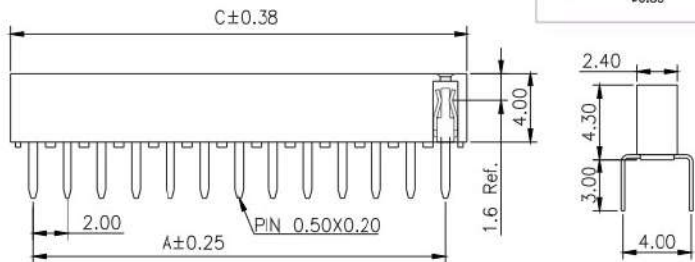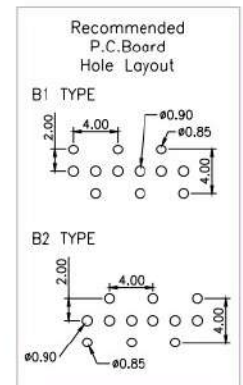

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	A	C		A	C		A	C		A	C
02	2.00	4.60	11	20.00	22.60	21	40.00	42.60	31	60.00	62.60
03	4.00	6.60	12	22.00	24.60	22	42.00	44.60	32	62.00	64.60
04	6.00	8.60	13	24.00	26.60	23	44.00	46.60	33	64.00	66.60
05	8.00	10.60	14	26.00	28.60	24	46.00	48.60	34	66.00	68.60
06	10.00	12.60	15	28.00	30.60	25	48.00	50.60	35	68.00	70.60
07	12.00	14.60	16	30.00	32.60	26	50.00	52.60	36	70.00	72.60
08	14.00	16.60	17	32.00	34.60	27	52.00	54.60	37	72.00	74.60
09	16.00	18.60	18	34.00	36.60	28	54.00	56.60	38	74.00	76.60
10	18.00	20.60	19	36.00	38.60	29	56.00	58.60	39	76.00	78.60
			20	38.00	40.60	30	58.00	60.60	40	78.00	80.60

Ordering Information

CSFF1

Height Option (H)

01

-

No. of Pins per Row

02

?

40

Standard Plating

02 : Gold Flash

Selective Plating

01 : Tin

05 : Gold Flash / Tin

Standard Packaging : Tube

R1AC

A Pin Type

003 : B1 Type

004 : B2 Type

For special length requirement
Please contact our sales personnel

Female Header

pitch 2.00mm (0.079") | Dual row | Dip

CSFA201 Series


Specifications

Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C





Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 Nylon

All materials must meet Greenconn's requirements for environmental protection.

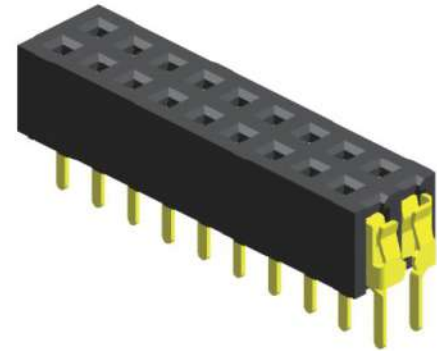

Mating with

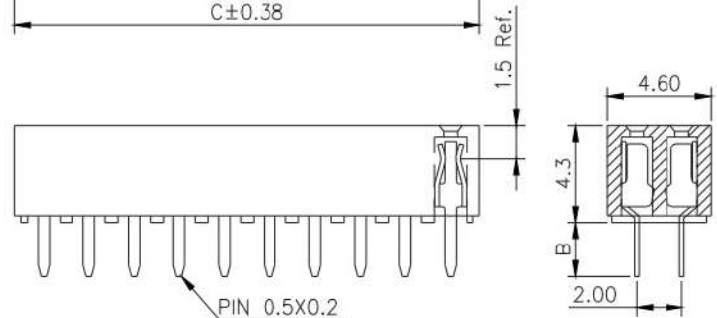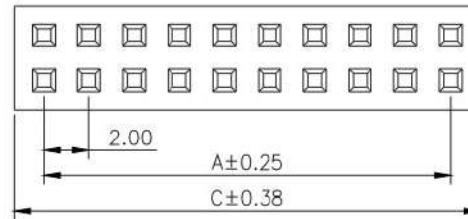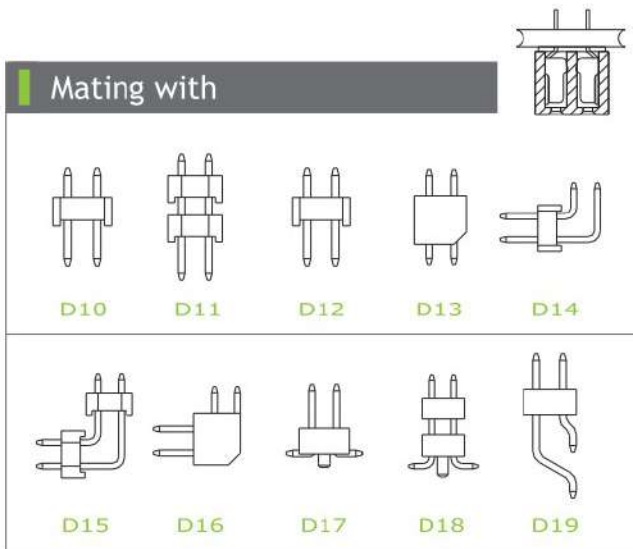

P.S. : Suggested mating pin length : 3.0 ~ 4.0 mm

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	A	C		A	C		A	C		A	C
02	2.00	4.60	11	20.00	22.60	21	40.00	42.60	31	60.00	62.60
03	4.00	6.60	12	22.00	24.60	22	42.00	44.60	32	62.00	64.60
04	6.00	8.60	13	24.00	26.60	23	44.00	46.60	33	64.00	66.60
05	8.00	10.60	14	26.00	28.60	24	46.00	48.60	34	66.00	68.60
06	10.00	12.60	15	28.00	30.60	25	48.00	50.60	35	68.00	70.60
07	12.00	14.60	16	30.00	32.60	26	50.00	52.60	36	70.00	72.60
08	14.00	16.60	17	32.00	34.60	27	52.00	54.60	37	72.00	74.60
09	16.00	18.60	18	34.00	36.60	28	54.00	56.60	38	74.00	76.60
10	18.00	20.60	19	36.00	38.60	29	56.00	58.60	39	76.00	78.60
			20	38.00	40.60	30	58.00	60.60	40	78.00	80.60

Ordering Information

CSFA2	<input type="checkbox"/> <input type="checkbox"/>	-	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	R1AC
	Height Option (H)		No. of Pins per Row	Standard Plating	Pin Length (B)	
	<input type="checkbox"/> 01		<input type="checkbox"/> 02	<input type="checkbox"/> 02 : Gold Flash	<input type="checkbox"/> 001 : B=2.40	
			<input type="checkbox"/> ?	Selective Plating		
			<input type="checkbox"/> 40	<input type="checkbox"/> 01 : Tin		
				<input type="checkbox"/> 05 : Gold Flash / Tin		

Standard Packaging : Tube

For special length requirement
Please contact our sales personnel

Female Header

pitch 2.00mm (0.079") | Dual row | Dip

CSFA203 Series


Specifications

Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C


Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 Nylon


All materials must meet Greenconn's requirements for environmental protection.

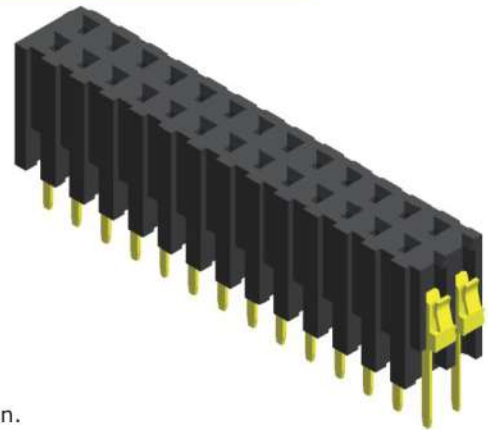

Mating with

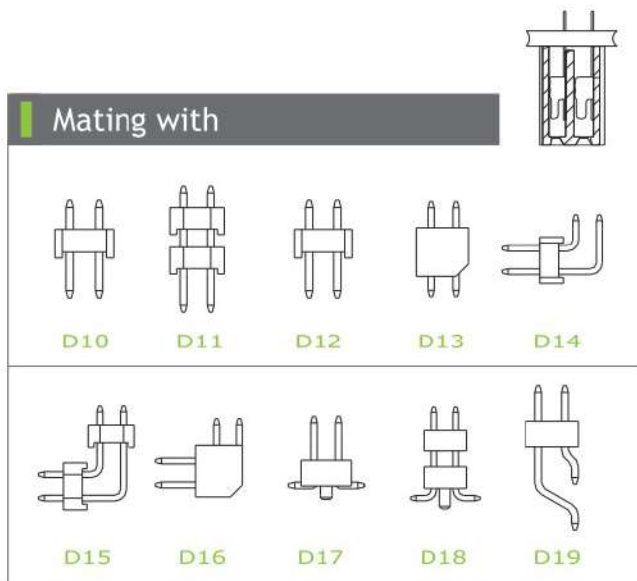

P.S. : Suggested mating pin length : 4.0 ~ 7.0 mm

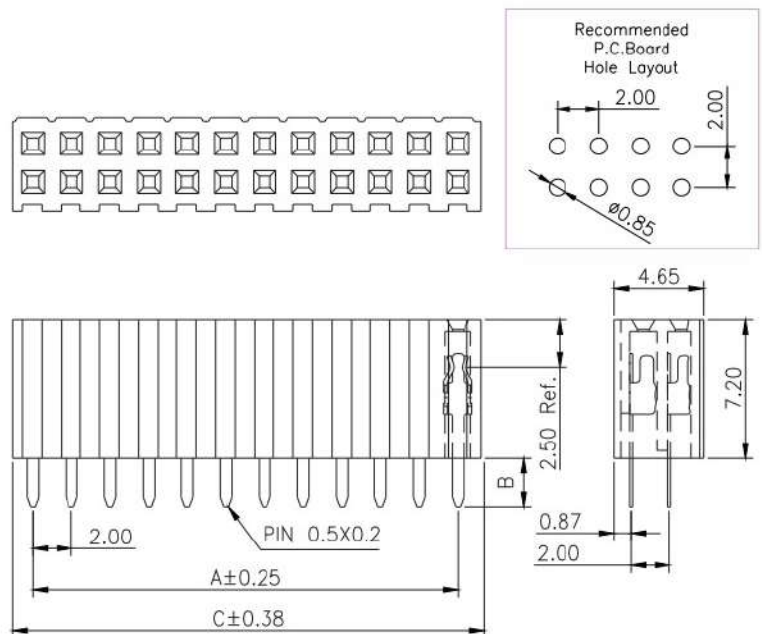

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	A	C		A	C		A	C		A	C
02	2.00	4.50	11	20.00	22.50	21	40.00	42.50	31	60.00	62.50
03	4.00	6.50	12	22.00	24.50	22	42.00	44.50	32	62.00	64.50
04	6.00	8.50	13	24.00	26.50	23	44.00	46.50	33	64.00	66.50
05	8.00	10.50	14	26.00	28.50	24	46.00	48.50	34	66.00	68.50
06	10.00	12.50	15	28.00	30.50	25	48.00	50.50	35	68.00	70.50
07	12.00	14.50	16	30.00	32.50	26	50.00	52.50	36	70.00	72.50
08	14.00	16.50	17	32.00	34.50	27	52.00	54.50	37	72.00	74.50
09	16.00	18.50	18	34.00	36.50	28	54.00	56.50	38	74.00	76.50
10	18.00	20.50	19	36.00	38.50	29	56.00	58.50	39	76.00	78.50
			20	38.00	40.50	30	58.00	60.50	40	78.00	80.50

Ordering Information

CSFA2	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	-	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	R1AC
	Height Option (H)		No. of Pins per Row	Standard Plating	Pin Length (B)	
	<input type="checkbox"/> <input type="checkbox"/>		<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> : Gold Flash	<input type="checkbox"/> : B=2.50	
	<input type="checkbox"/> <input type="checkbox"/>		<input type="checkbox"/> <input type="checkbox"/>	Selective Plating	<input type="checkbox"/> : B=2.30	
	<input type="checkbox"/> <input type="checkbox"/>		<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> : Tin	For special length requirement Please contact our sales personnel	
	<input type="checkbox"/> <input type="checkbox"/>		<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> : Gold Flash / Tin		

Female Header

pitch 2.00mm (0.079") | Dual row | Dip

CSFA204 Series


Specifications

Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C



Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 Nylon

All materials must meet Greenconn's requirements for environmental protection.

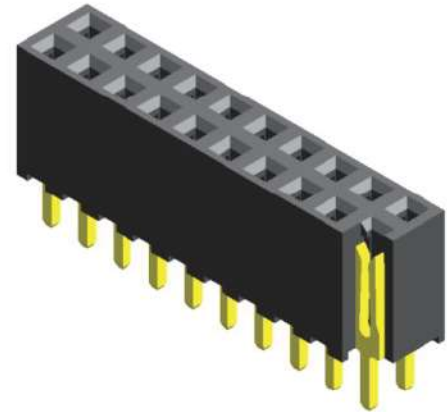

Mating with

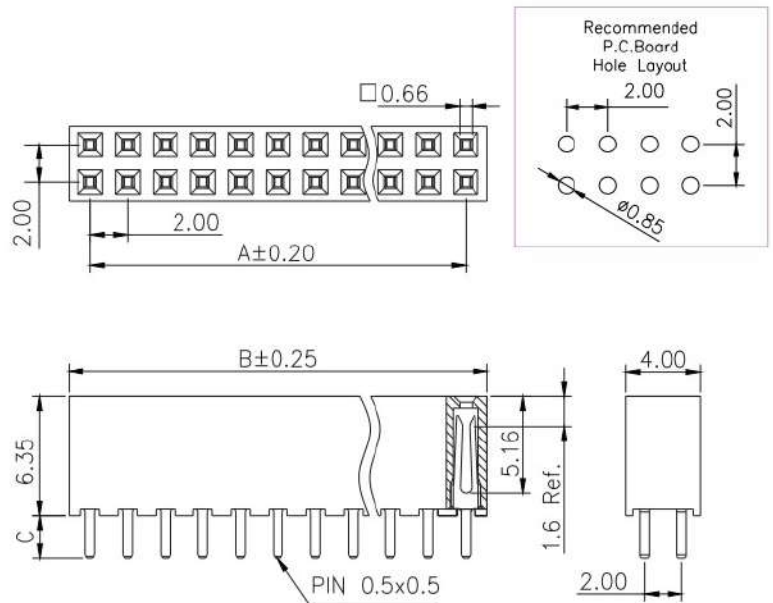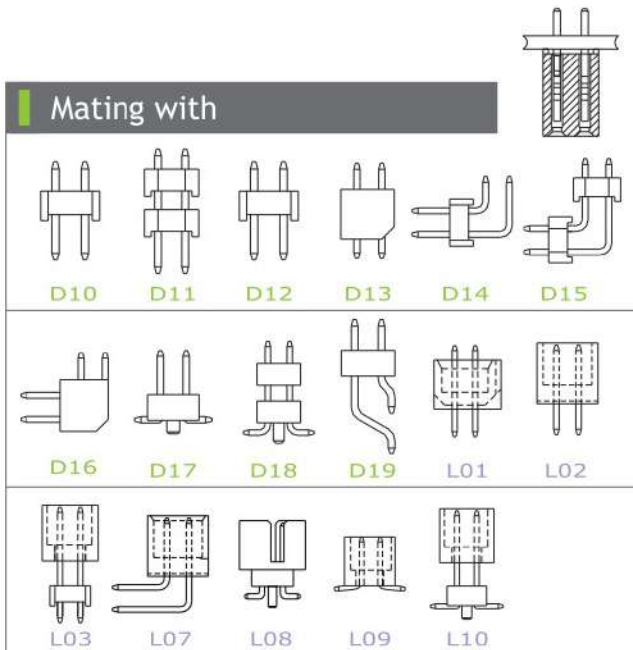

P.S. : Suggested mating pin length : 3.0 ~ 4.9 mm

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	A	B		A	B		A	B		A	B
02	2.00	4.30	11	20.00	22.30	21	40.00	42.30	31	60.00	62.30
03	4.00	6.30	12	22.00	24.30	22	42.00	44.30	32	62.00	64.30
04	6.00	8.30	13	24.00	26.30	23	44.00	46.30	33	64.00	66.30
05	8.00	10.30	14	26.00	28.30	24	46.00	48.30	34	66.00	68.30
06	10.00	12.30	15	28.00	30.30	25	48.00	50.30	35	68.00	70.30
07	12.00	14.30	16	30.00	32.30	26	50.00	52.30	36	70.00	72.30
08	14.00	16.30	17	32.00	34.30	27	52.00	54.30	37	72.00	74.30
09	16.00	18.30	18	34.00	36.30	28	54.00	56.30	38	74.00	76.30
10	18.00	20.30	19	36.00	38.30	29	56.00	58.30	39	76.00	78.30
			20	38.00	40.30	30	58.00	60.30	40	78.00	80.30

Ordering Information

CSFA2	<input type="checkbox"/> <input type="checkbox"/>	-	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	R1AC
	Height Option (H)		No. of Pins per Row	Standard Plating	Pin Length (B)	
	<input type="checkbox"/> 04		<input type="checkbox"/> 02	<input type="checkbox"/> 02 : Gold Flash	<input type="checkbox"/> 001 : B=2.30	
			<input type="checkbox"/> 40	Selective Plating		
				<input type="checkbox"/> 01 : Tin		
				<input type="checkbox"/> 05 : Gold Flash / Tin		

For special length requirement
Please contact our sales personnel

Female Header

pitch 2.00mm (0.079") | Dual row | Dip

CSFA208
CSFA210 Series


Specifications

Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C



Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 Nylon

All materials must meet Greenconn's requirements for environmental protection.

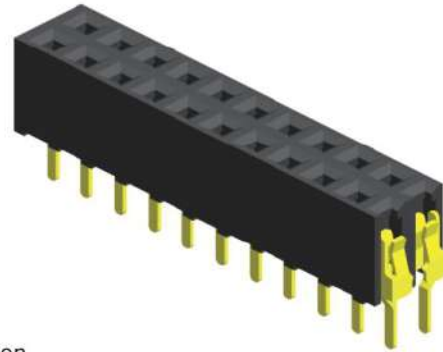

Mating with

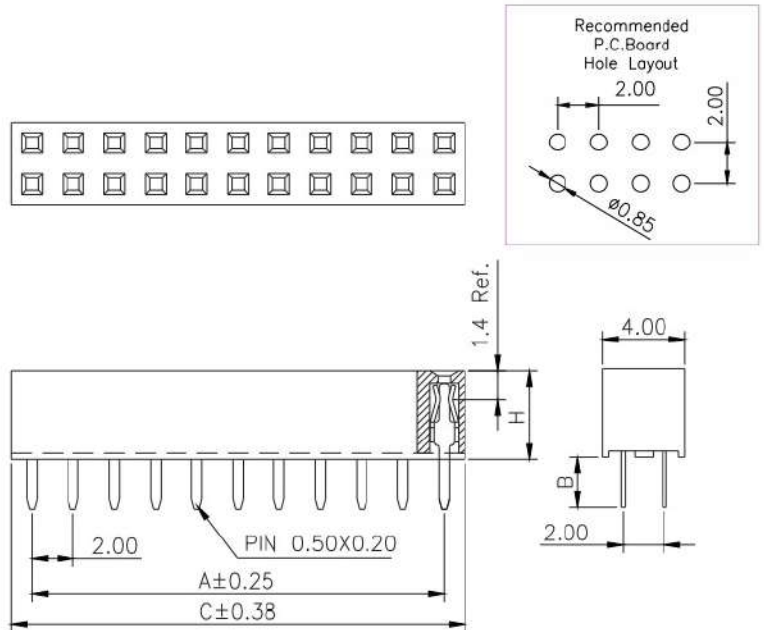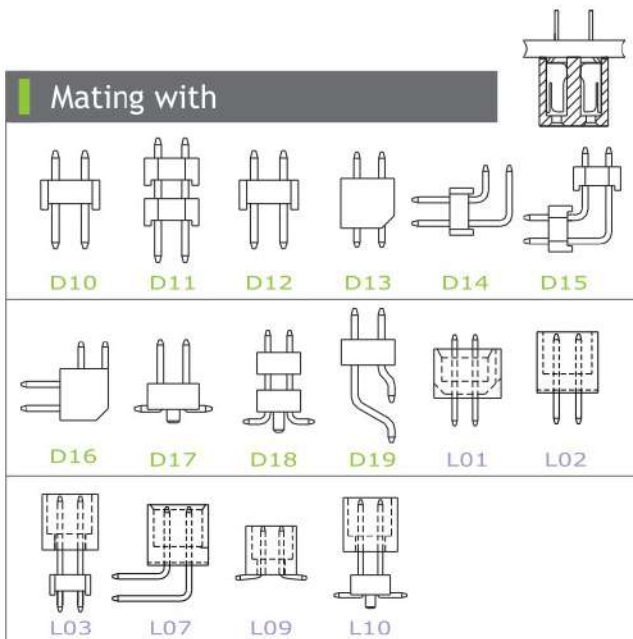

P.S. : Suggested mating pin length : 2.9 ~ 4.0 mm

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	A	C		A	C		A	C		A	C
03	4.00	6.60	11	20.00	22.60	21	40.00	42.60	31	60.00	62.60
04	6.00	8.60	12	22.00	24.60	22	42.00	44.60	32	62.00	64.60
05	8.00	10.60	13	24.00	26.60	23	44.00	46.60	33	64.00	66.60
06	10.00	12.60	14	26.00	28.60	24	46.00	48.60	34	66.00	68.60
07	12.00	14.60	15	28.00	30.60	25	48.00	50.60	35	68.00	70.60
08	14.00	16.60	16	30.00	32.60	26	50.00	52.60	36	70.00	72.60
09	16.00	18.60	17	32.00	34.60	27	52.00	54.60	37	72.00	74.60
10	18.00	20.60	18	34.00	36.60	28	54.00	56.60	38	74.00	76.60
			19	36.00	38.60	29	56.00	58.60	39	76.00	78.60
			20	38.00	40.60	30	58.00	60.60	40	78.00	80.60

Ordering Information

CSFA2	<input type="checkbox"/> <input type="checkbox"/>	-	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	R1AC
	Height Option (H)		No. of Pins per Row	Standard Plating		Pin Length (B)	
	<input type="checkbox"/> 08 : H=4.30		<input type="checkbox"/> 03	<input type="checkbox"/> 02 : Gold Flash	CSFA208...A	<input type="checkbox"/> 001 : B=2.40	
	<input type="checkbox"/> 10 : H=4.00		<input type="checkbox"/> 40	Selective Plating	CSFA210...A	<input type="checkbox"/> 001 : B=2.80	
				<input type="checkbox"/> 01 : Tin			For special length requirement Please contact our sales personnel
				<input type="checkbox"/> 05 : Gold Flash / Tin			

Female Header

pitch 2.00mm (0.079") | Dual row | R/A

CSFB203 Series


Specifications

Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C






Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 Nylon

All materials must meet Greenconn's requirements for environmental protection.

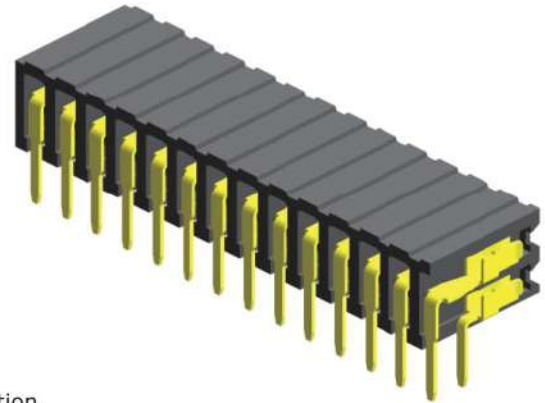

Mating with

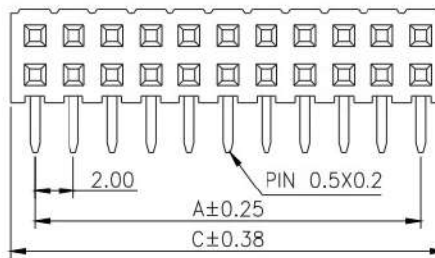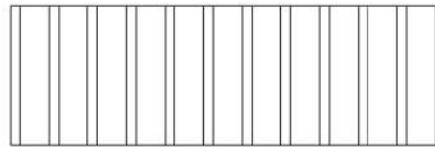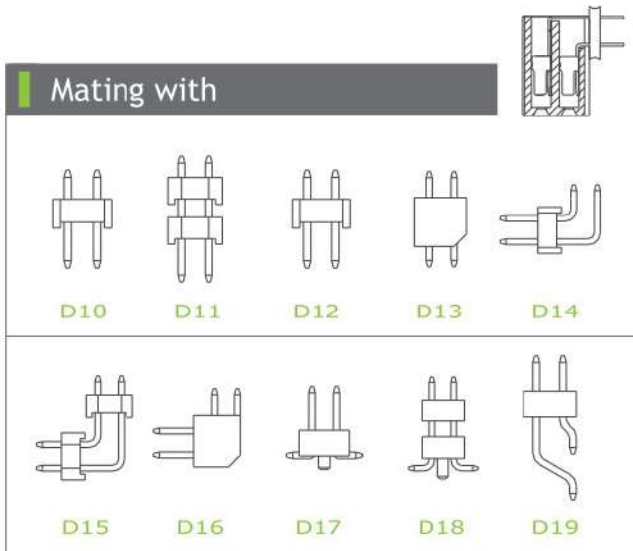

P.S. : Suggested mating pin length : 3.5 ~ 7.0 mm

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	A	C		A	C		A	C		A	C
02	2.00	4.50	11	20.00	22.50	21	40.00	42.50	31	60.00	62.50
03	4.00	6.50	12	22.00	24.50	22	42.00	44.50	32	62.00	64.50
04	6.00	8.50	13	24.00	26.50	23	44.00	46.50	33	64.00	66.50
05	8.00	10.50	14	26.00	28.50	24	46.00	48.50	34	66.00	68.50
06	10.00	12.50	15	28.00	30.50	25	48.00	50.50	35	68.00	70.50
07	12.00	14.50	16	30.00	32.50	26	50.00	52.50	36	70.00	72.50
08	14.00	16.50	17	32.00	34.50	27	52.00	54.50	37	72.00	74.50
09	16.00	18.50	18	34.00	36.50	28	54.00	56.50	38	74.00	76.50
10	18.00	20.50	19	36.00	38.50	29	56.00	58.50	39	76.00	78.50
			20	38.00	40.50	30	58.00	60.50	40	78.00	80.50

Ordering Information

CSFB2

Height Option (H)

-

No. of Pins per Row

Standard Plating

: Gold Flash

Selective Plating

: Tin

: Gold Flash / Tin

Standard Packaging : Tube

Pin Length (B)

: B=2.55

: B=2.70

For special length requirement
Please contact our sales personnel

R1AC

Female Header

pitch 2.00mm (0.079") | Dual row | R/A

CSFB204 Series


Specifications

Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C


Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 Nylon



All materials must meet Greenconn's requirements for environmental protection.

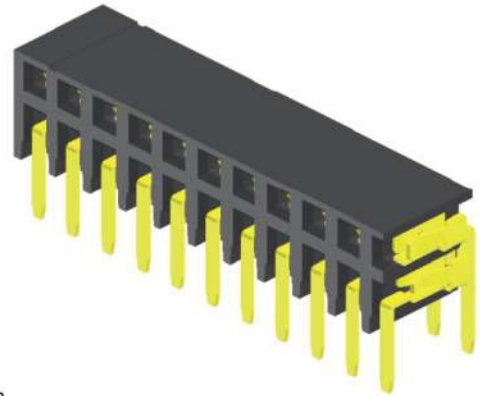

Mating with

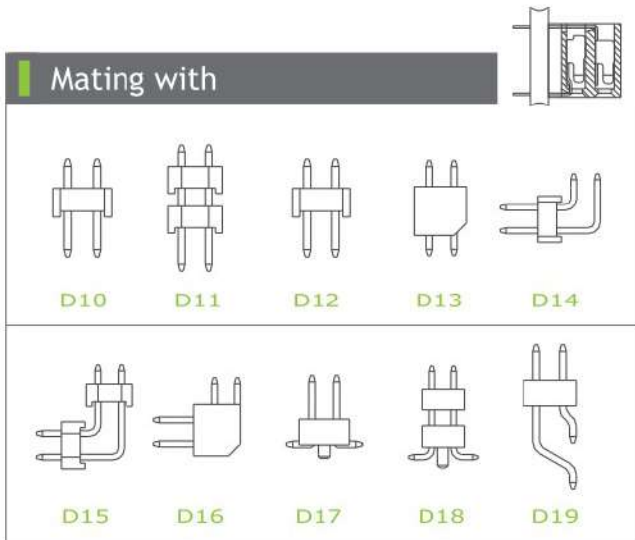

P.S. : Suggested mating pin length : 3.0 ~ 4.8 mm

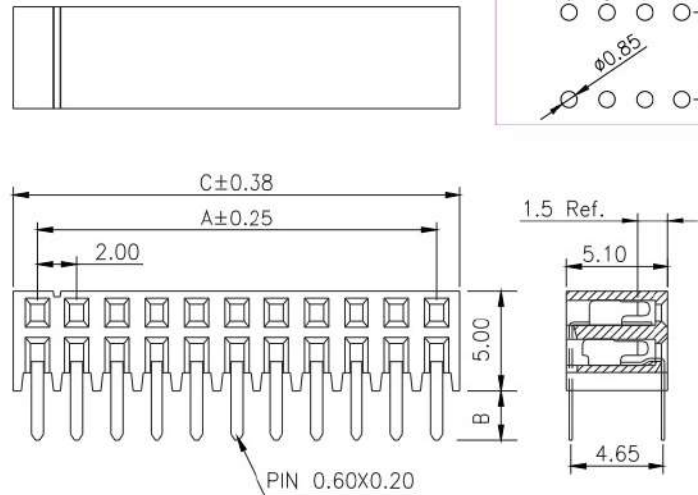

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	A	C		A	C		A	C
02	2.00	4.40	11	20.00	22.40	21	40.00	42.40
03	4.00	6.40	12	22.00	24.40	22	42.00	44.40
04	6.00	8.40	13	24.00	26.40	23	44.00	46.40
05	8.00	10.40	14	26.00	28.40	24	46.00	48.40
06	10.00	12.40	15	28.00	30.40	25	48.00	50.40
07	12.00	14.40	16	30.00	32.40			
08	14.00	16.40	17	32.00	34.40			
09	16.00	18.40	18	34.00	36.40			
10	18.00	20.40	19	36.00	38.40			
			20	38.00	40.40			

Ordering Information

CSFB2	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	-	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	R1AC
	Height Option (H)		No. of Pins per Row	Standard Plating	Pin Length (B)	
	<input type="checkbox"/> 04		<input type="checkbox"/> 02	<input type="checkbox"/> 02 : Gold Flash	<input type="checkbox"/> 001 : B=2.50	
			<input type="checkbox"/> 25	Selective Plating		
				<input type="checkbox"/> 01 : Tin		
				<input type="checkbox"/> 05 : Gold Flash / Tin		

For special length requirement Please contact our sales personnel

Female Header

pitch 2.00mm (0.079") | Dual row | R/A

CSFB207 Series


Specifications

Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C



Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 LCP

All materials must meet Greenconn's requirements for environmental protection.

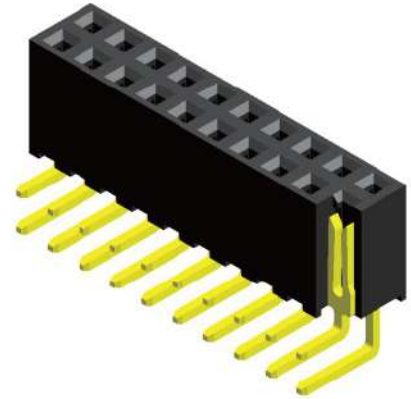

Mating with

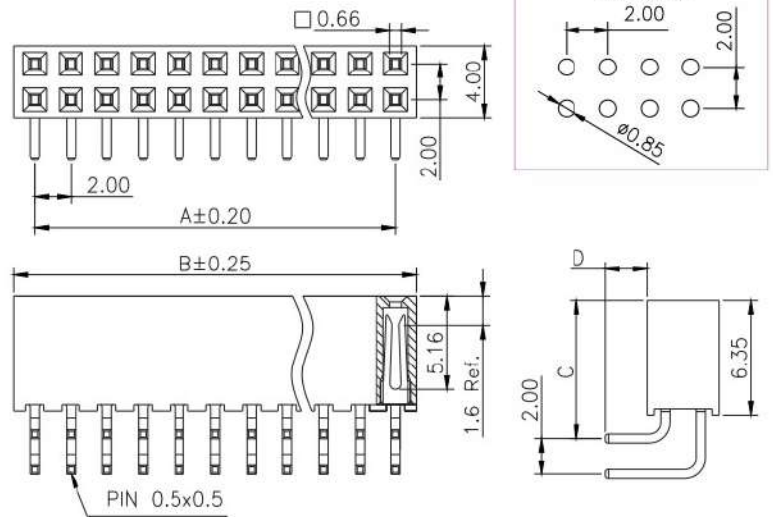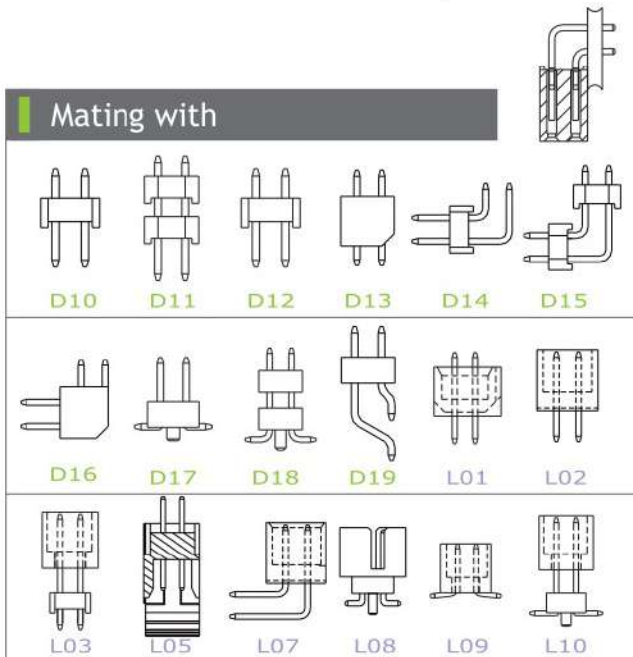

P.S. : Suggested mating pin length : 3.0 ~ 4.9 mm

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	A	B		A	B		A	B		A	B
02	2.00	4.30	11	20.00	22.30	21	40.00	42.30	31	60.00	62.30
03	4.00	6.30	12	22.00	24.30	22	42.00	44.30	32	62.00	64.30
04	6.00	8.30	13	24.00	26.30	23	44.00	46.30	33	64.00	66.30
05	8.00	10.30	14	26.00	28.30	24	46.00	48.30	34	66.00	68.30
06	10.00	12.30	15	28.00	30.30	25	48.00	50.30	35	68.00	70.30
07	12.00	14.30	16	30.00	32.30	26	50.00	52.30	36	70.00	72.30
08	14.00	16.30	17	32.00	34.30	27	52.00	54.30	37	72.00	74.30
09	16.00	18.30	18	34.00	36.30	28	54.00	56.30	38	74.00	76.30
10	18.00	20.30	19	36.00	38.30	29	56.00	58.30	39	76.00	78.30
			20	38.00	40.30	30	58.00	60.30	40	78.00	80.30

Ordering Information

CSFB2	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	-	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	C1AC
	Height Option (H)		No. of Pins per Row	Standard Plating	Pin Length (C/D)	
	<input type="checkbox"/> 07		<input type="checkbox"/> 02	<input type="checkbox"/> 02 : Gold Flash	<input type="checkbox"/> 001 : C=7.60 / D=2.30	
			<input type="checkbox"/> 40	Selective Plating		
				<input type="checkbox"/> 01 : Tin		
				<input type="checkbox"/> 05 : Gold Flash / Tin		

For special length requirement
Please contact our sales personnel

Female Header

pitch 2.00mm (0.079") | Dual row | R/A | Polarization

CSFB207 Series


Specifications

Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C


Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 LCP




All materials must meet Greenconn's requirements for environmental protection.

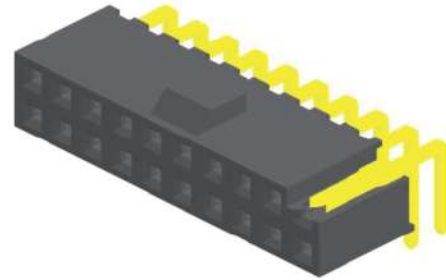

Mating with

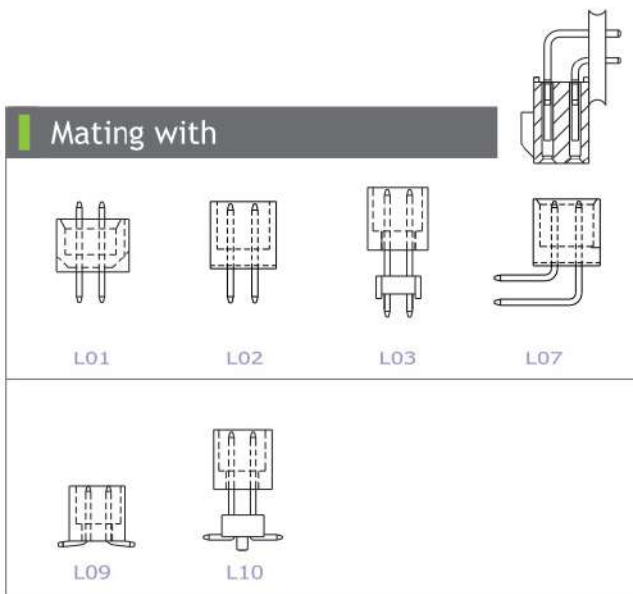

P.S. : Suggested mating pin length : 3.0 ~ 4.9 mm

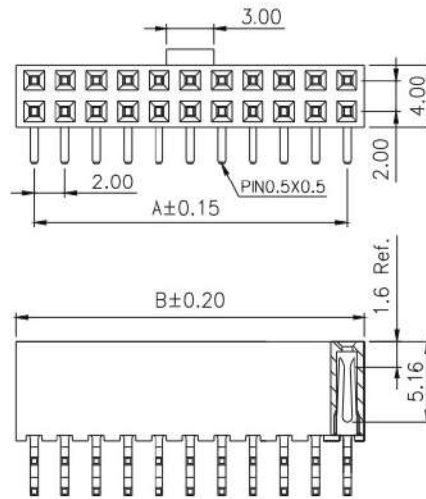

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	A	B		A	B		A	B		A	B
02			11	20.00	22.30	21	40.00	42.30	31	60.00	62.30
03			12	22.00	24.30	22	42.00	44.30	32	62.00	64.30
04	6.00	8.30	13	24.00	26.30	23	44.00	46.30	33	64.00	66.30
05	8.00	10.30	14	26.00	28.30	24	46.00	48.30	34	66.00	68.30
06	10.00	12.30	15	28.00	30.30	25	48.00	50.30	35	68.00	70.30
07	12.00	14.30	16	30.00	32.30	26	50.00	52.30	36	70.00	72.30
08	14.00	16.30	17	32.00	34.30	27	52.00	54.30	37	72.00	74.30
09	16.00	18.30	18	34.00	36.30	28	54.00	56.30	38	74.00	76.30
10	18.00	20.30	19	36.00	38.30	29	56.00	58.30	39	76.00	78.30
			20	38.00	40.30	30	58.00	60.30	40	78.00	80.30

Ordering Information

Standard Packaging : Tube

CSFB2	<input type="checkbox"/> <input checked="" type="checkbox"/>	-	<input type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/> <input checked="" type="checkbox"/>	E001C1AC
	Height Option (H)		No. of Pins per Row	Standard Plating	
	<input type="checkbox"/> <input checked="" type="checkbox"/>		<input type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/> <input checked="" type="checkbox"/> : Gold Flash	
			<input type="checkbox"/> <input checked="" type="checkbox"/>	Selective Plating	
			<input type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/> <input checked="" type="checkbox"/> : Tin	
			<input type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/> <input checked="" type="checkbox"/> : Gold Flash / Tin	

Female Header

pitch 2.00mm (0.079") | Dual row | S.M.T. | Locating peg

CSFC201 Series


Specifications

Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C


Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 Nylon


All materials must meet Greenconn's requirements for environmental protection.

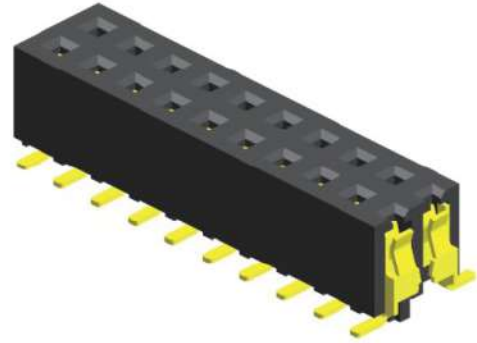

Mating with

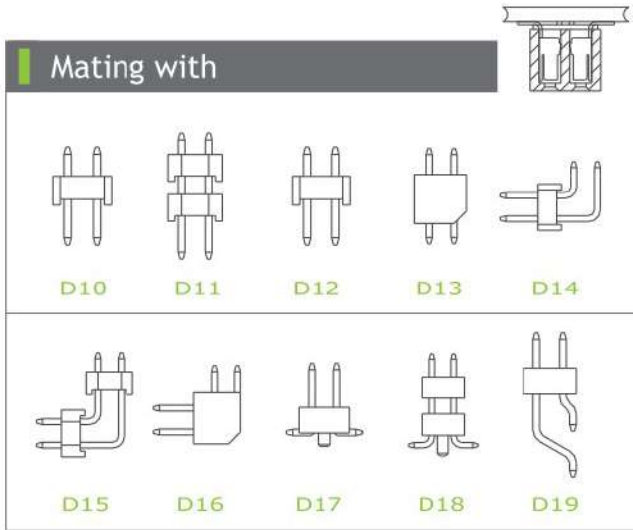

P.S. : Suggested mating pin length : 3.0 ~ 4.0 mm

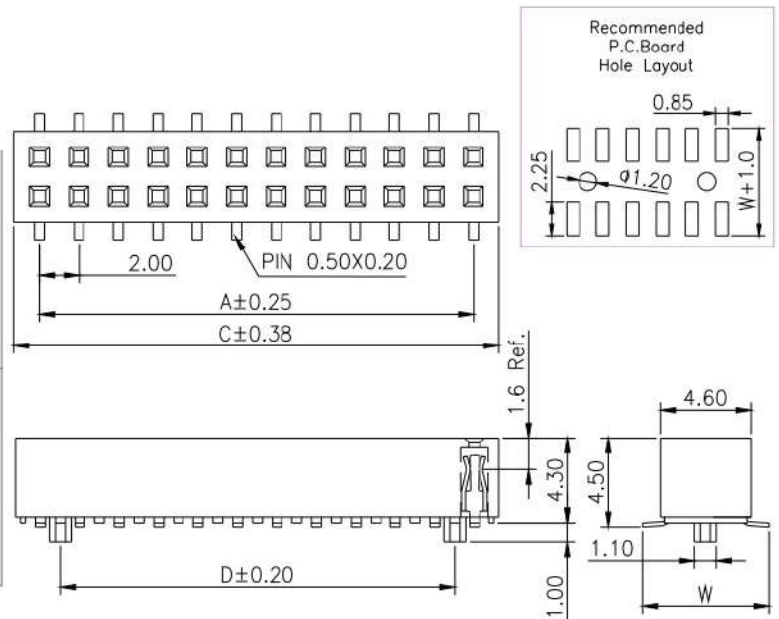

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information						
	A	C	D		A	C	D		A	C	D				
03	4.00	6.60	2.00	11	20.00	22.60	18.00	21	40.00	42.60	38.00	31	60.00	62.60	58.00
04	6.00	8.60	4.00	12	22.00	24.60	20.00	22	42.00	44.60	40.00	32	62.00	64.60	60.00
05	8.00	10.60	6.00	13	24.00	26.60	22.00	23	44.00	46.60	42.00	33	64.00	66.60	62.00
06	10.00	12.60	8.00	14	26.00	28.60	24.00	24	46.00	48.60	44.00	34	66.00	68.60	64.00
07	12.00	14.60	10.00	15	28.00	30.60	26.00	25	48.00	50.60	46.00	35	68.00	70.60	66.00
08	14.00	16.60	12.00	16	30.00	32.60	28.00	26	50.00	52.60	48.00	36	70.00	72.60	68.00
09	16.00	18.60	14.00	17	32.00	34.60	30.00	27	52.00	54.60	50.00	37	72.00	74.60	70.00
10	18.00	20.60	16.00	18	34.00	36.60	32.00	28	54.00	56.60	52.00	38	74.00	76.60	72.00
				19	36.00	38.60	34.00	29	56.00	58.60	54.00	39	76.00	78.60	74.00
				20	38.00	40.60	36.00	30	58.00	60.60	56.00	40	78.00	80.60	76.00

Ordering Information

CSFC2	<input checked="" type="checkbox"/> X <input checked="" type="checkbox"/>	-	X X	<input checked="" type="checkbox"/> X <input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> X <input checked="" type="checkbox"/> X	R1AC
	Height Option (H) Standard		No. of Pins per Row	Standard Plating	<input type="checkbox"/> C Pin Length (W)	
	<input type="checkbox"/> 01		<input type="checkbox"/> 03	<input type="checkbox"/> 02 : Gold Flash	<input type="checkbox"/> 002 : W=6.40	
			<input type="checkbox"/> 40	Selective Plating	<input type="checkbox"/> 007 : W=7.20	
				<input type="checkbox"/> 01 : Tin	For special length requirement Please contact our sales personnel	
				<input type="checkbox"/> 05 : Gold Flash / Tin		

Female Header

pitch 2.00mm (0.079") | Dual row | S.M.T.

CSFC204 Series


Specifications

Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C


Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 Nylon


All materials must meet Greenconn's requirements for environmental protection.

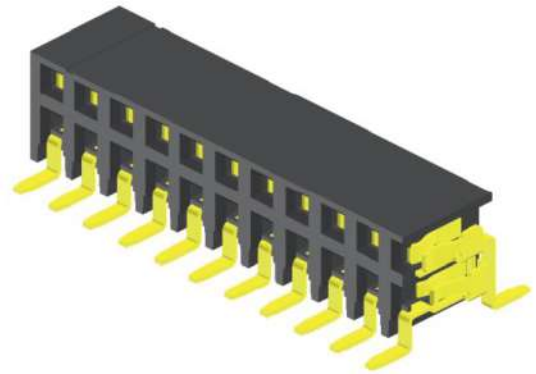

Mating with

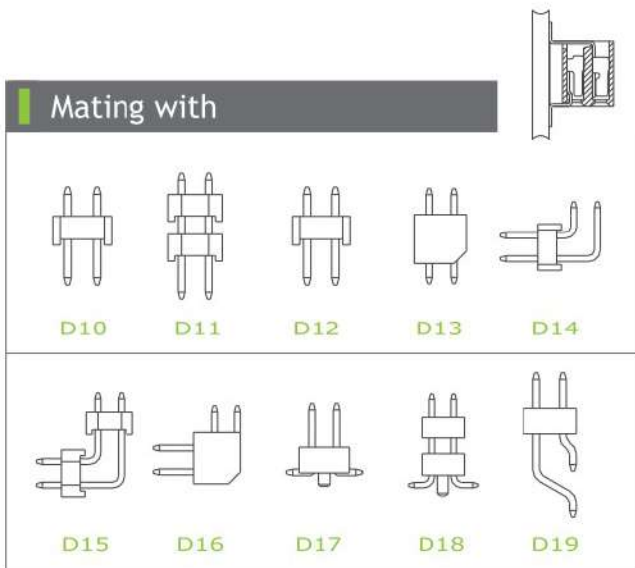

P.S. : Suggested mating pin length : 3.0 ~ 4.8 mm

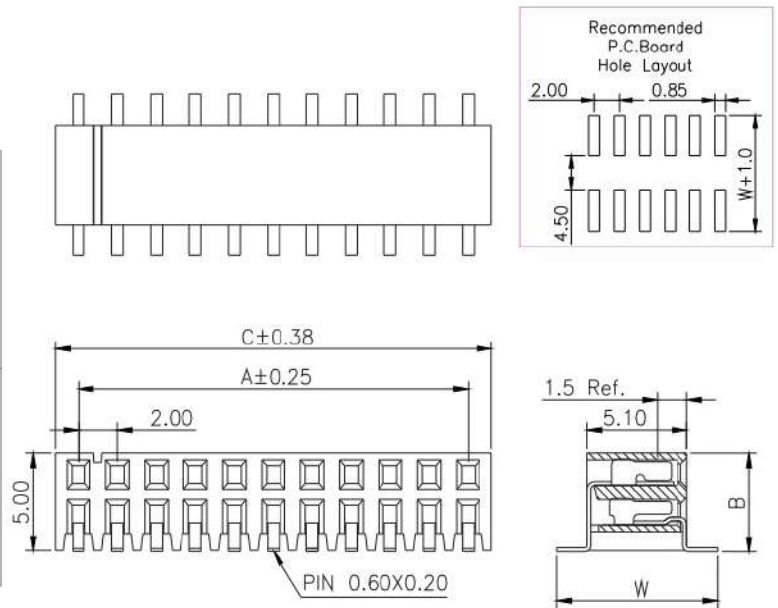

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	A	C		A	C		A	C
02	2.00	4.40	11	20.00	22.40	21	40.00	42.40
03	4.00	6.40	12	22.00	24.40	22	42.00	44.40
04	6.00	8.40	13	24.00	26.40	23	44.00	46.40
05	8.00	10.40	14	26.00	28.40	24	46.00	48.40
06	10.00	12.40	15	28.00	30.40	25	48.00	50.40
07	12.00	14.40	16	30.00	32.40			
08	14.00	16.40	17	32.00	34.40			
09	16.00	18.40	18	34.00	36.40			
10	18.00	20.40	19	36.00	38.40			
			20	38.00	40.40			

Ordering Information

CSFC2	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	-	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	R1AC
	Height Option (H)		No. of Pins per Row	Standard Plating	Pin Length (B/W)	
	<input type="checkbox"/> 04		<input type="checkbox"/> 02	<input type="checkbox"/> 02 : Gold Flash	<input type="checkbox"/> 001 : B=5.05 / W=8.30	
			<input type="checkbox"/> ?	Selective Plating		
			<input type="checkbox"/> 25	<input type="checkbox"/> 01 : Tin		
				<input type="checkbox"/> 05 : Gold Flash / Tin		

Standard Packaging : Tube

For special length requirement
Please contact our sales personnel

Female Header

pitch 2.00mm (0.079") | Dual row | S.M.T. | Locating peg

CSFC205 Series


Specifications

Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C


Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 Nylon


All materials must meet Greenconn's requirements for environmental protection.

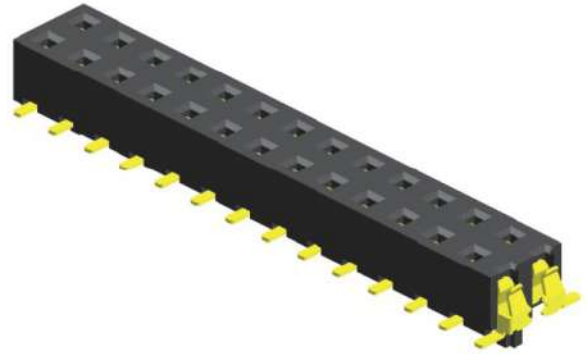

Mating with

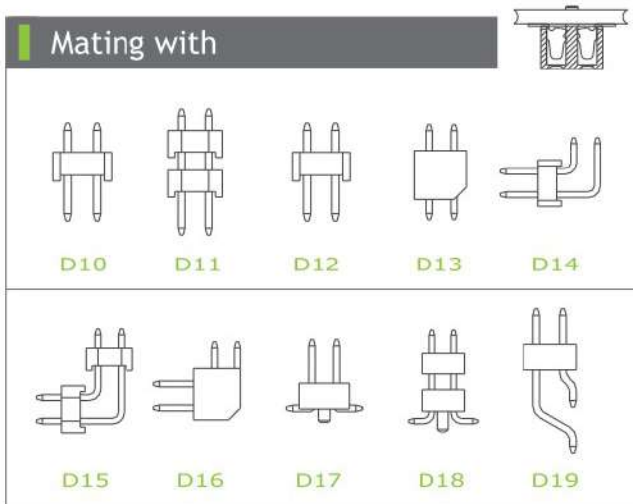

P.S. : Suggested mating pin length : 2.5 ~ 2.8 mm

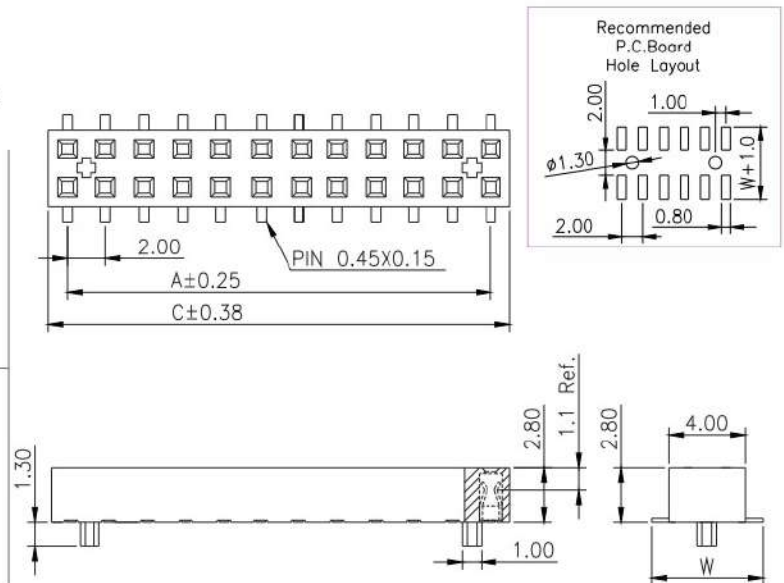

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	A	C		A	C		A	C		A	C
02	2.00	4.00	11	20.00	22.00	21	40.00	42.00	31	60.00	62.00
03	4.00	6.00	12	22.00	24.00	22	42.00	44.00	32	62.00	64.00
04	6.00	8.00	13	24.00	26.00	23	44.00	46.00	33	64.00	66.00
05	8.00	10.00	14	26.00	28.00	24	46.00	48.00	34	66.00	68.00
06	10.00	12.00	15	28.00	30.00	25	48.00	50.00	35	68.00	70.00
07	12.00	14.00	16	30.00	32.00	26	50.00	52.00			
08	14.00	16.00	17	32.00	34.00	27	52.00	54.00			
09	16.00	18.00	18	34.00	36.00	28	54.00	56.00			
10	18.00	20.00	19	36.00	38.00	29	56.00	58.00			
			20	38.00	40.00	30	58.00	60.00			

Ordering Information

CSFC2

Height Option (H)

-

No. of Pins per Row

Standard Plating

: Gold Flash

Selective Plating

: Tin

Standard Packaging : Tube

Pin Length (W)

A : 001 : W=5.80

C : 003 : W=6.30

D : 001 : W=5.80

R1AC

For special length requirement
Please contact our sales personnel

Female Header

pitch 2.00mm (0.079") | Dual row | S.M.T. | Locating peg

CSFC206 Series


Specifications

Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C


Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 Nylon




All materials must meet Greenconn's requirements for environmental protection.

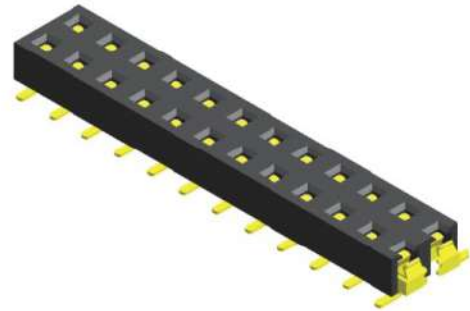

Mating with

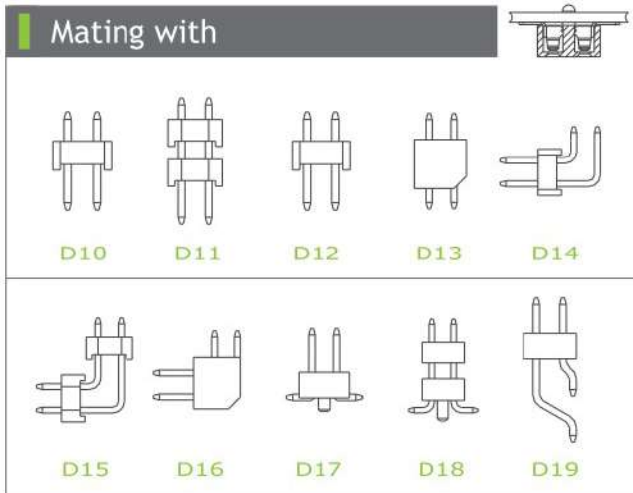

P.S. : Suggested mating pin length : 1.6 ~ 2.0 mm

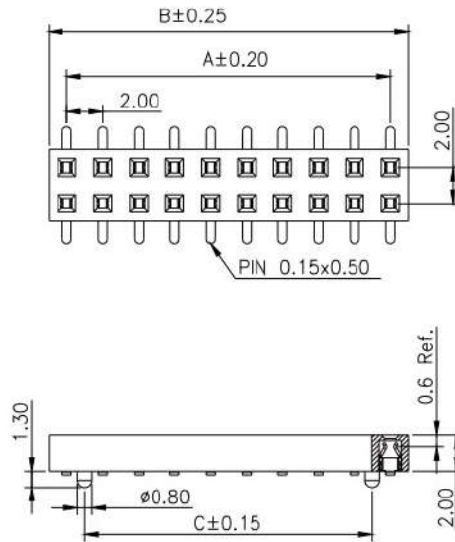

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	A	B	C		A	B	C		A	B	C		A	B	C
03	4.00	6.00	2.00	11	20.00	22.00	18.00	21	40.00	42.00	38.00	31	60.00	62.00	58.00
04	6.00	8.00	4.00	12	22.00	24.00	20.00	22	42.00	44.00	40.00	32	62.00	64.00	60.00
05	8.00	10.00	6.00	13	24.00	26.00	22.00	23	44.00	46.00	42.00	33	64.00	66.00	62.00
06	10.00	12.00	8.00	14	26.00	28.00	24.00	24	46.00	48.00	44.00	34	66.00	68.00	64.00
07	12.00	14.00	10.00	15	28.00	30.00	26.00	25	48.00	50.00	46.00	35	68.00	70.00	66.00
08	14.00	16.00	12.00	16	30.00	32.00	28.00	26	50.00	52.00	48.00	36	70.00	72.00	68.00
09	16.00	18.00	14.00	17	32.00	34.00	30.00	27	52.00	54.00	50.00	37	72.00	74.00	70.00
10	18.00	20.00	16.00	18	34.00	36.00	32.00	28	54.00	56.00	52.00	38	74.00	76.00	72.00
				19	36.00	38.00	34.00	29	56.00	58.00	54.00	39	76.00	78.00	74.00
				20	38.00	40.00	36.00	30	58.00	60.00	56.00	40	78.00	80.00	76.00

Ordering Information

CSFC2 Height Option (H)

- No. of Pins per Row

Standard Plating

: Gold Flash

Selective Plating

: Tin

Standard Packaging : Tube

R1AC

Pin Length (W)

: W=6.50

: W=5.10

For special length requirement Please contact our sales personnel

Female Header

pitch 2.00mm (0.079") | Dual row | S.M.T. | Locating peg

CSFC208
CSFC210 Series


Specifications

Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C



Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 Nylon

All materials must meet Greenconn's requirements for environmental protection.

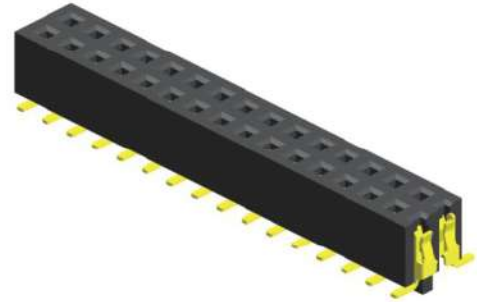

Mating with

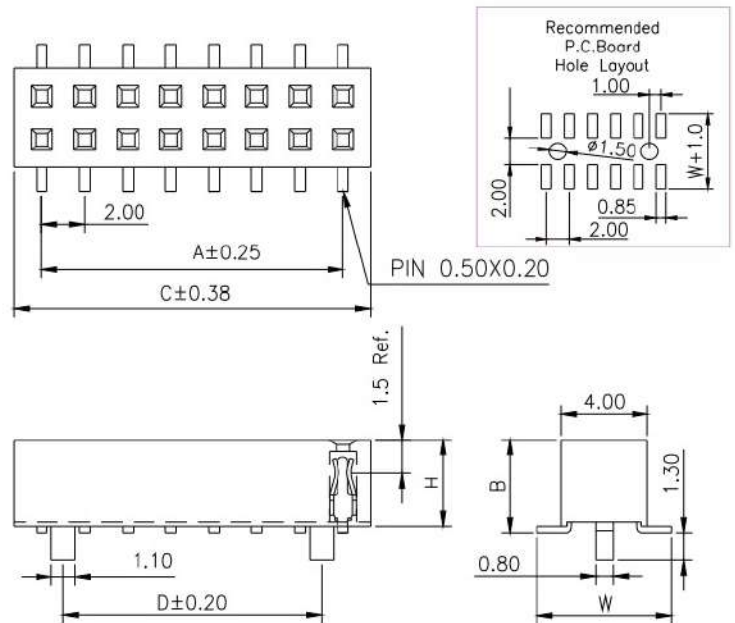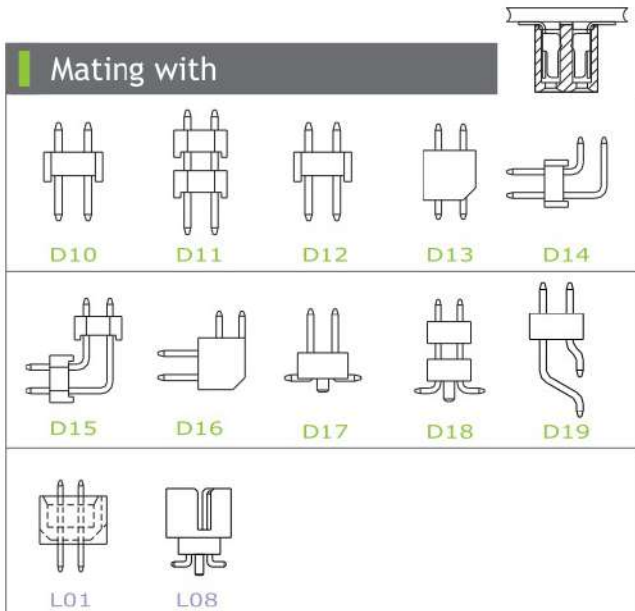

P.S. : Suggested mating pin length : 3.0 ~ 4.0 mm

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	A	C	D		A	C	D		A	C	D		A	C	D
03	4.00	6.60	2.00	11	20.00	22.60	18.00	21	40.00	42.60	38.00	31	60.00	62.60	58.00
04	6.00	8.60	4.00	12	22.00	24.60	20.00	22	42.00	44.60	40.00	32	62.00	64.60	60.00
05	8.00	10.60	6.00	13	24.00	26.60	22.00	23	44.00	46.60	42.00	33	64.00	66.60	62.00
06	10.00	12.60	8.00	14	26.00	28.60	24.00	24	46.00	48.60	44.00	34	66.00	68.60	64.00
07	12.00	14.60	10.00	15	28.00	30.60	26.00	25	48.00	50.60	46.00	35	68.00	70.60	66.00
08	14.00	16.60	12.00	16	30.00	32.60	28.00	26	50.00	52.60	48.00	36	70.00	72.60	68.00
09	16.00	18.60	14.00	17	32.00	34.60	30.00	27	52.00	54.60	50.00	37	72.00	74.60	70.00
10	18.00	20.60	16.00	18	34.00	36.60	32.00	28	54.00	56.60	52.00	38	74.00	76.60	72.00
				19	36.00	38.60	34.00	29	56.00	58.60	54.00	39	76.00	78.60	74.00
				20	38.00	40.60	36.00	30	58.00	60.60	56.00	40	78.00	80.60	76.00

Ordering Information

CSFC2

Height Option (H)

- 08 : H=4.30
- 10 : H=4.00

-

No. of Pins per Row

- 03
- ?
- 40

Standard Plating

- 02 : Gold Flash

Selective Plating

- 01 : Tin
- 05 : Gold Flash / Tin

Standard Packaging : Tube

Pin Length (B/W)

- 001 : B=4.50 / W=5.60
- 002 : B=4.30 / W=6.25

R1AC

For special length requirement
Please contact our sales personnel

Female Header

pitch 2.00mm (0.079") | Dual row | S.M.T.

CSFC215 Series


Specifications

Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C



Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 LCP

All materials must meet Greenconn's requirements for environmental protection.

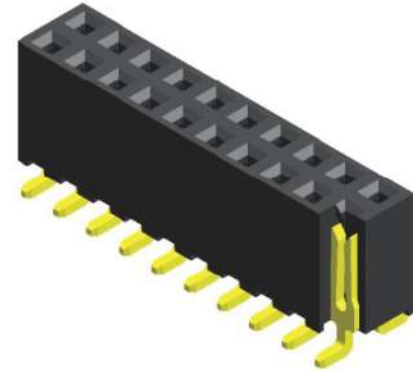

Mating with

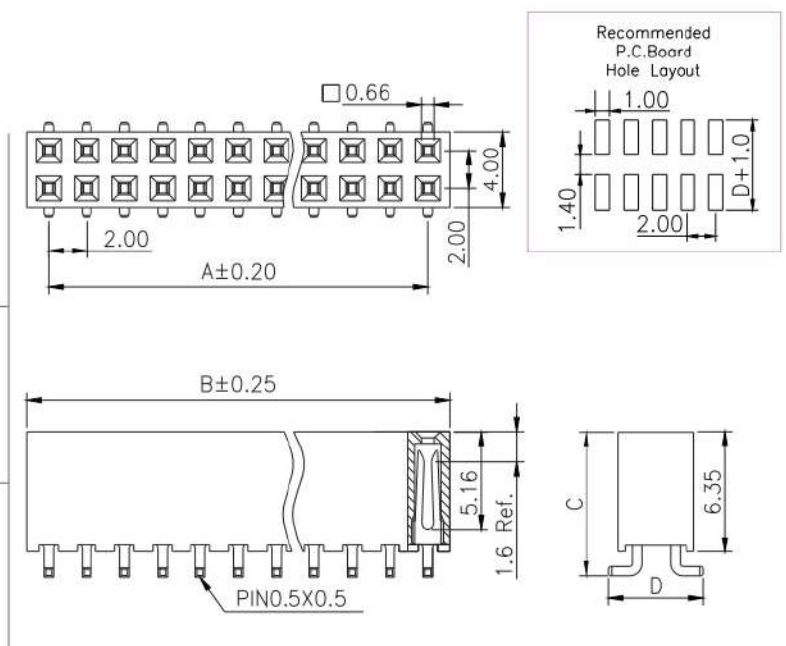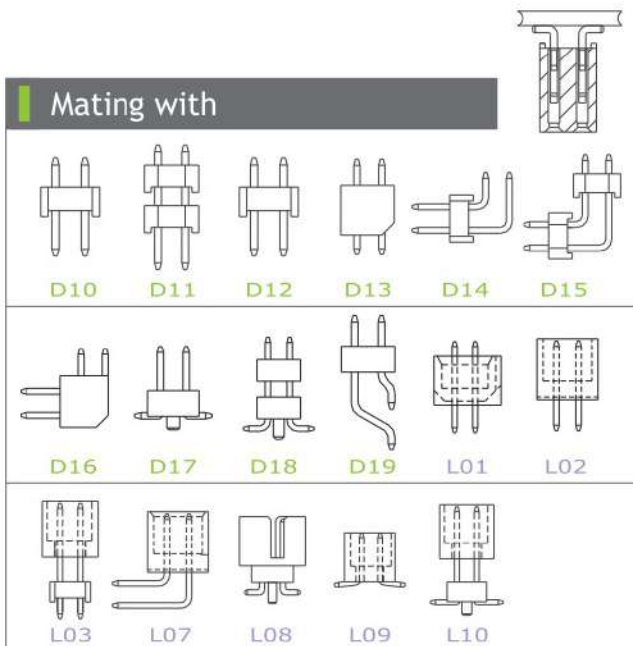

P.S. : Suggested mating pin length : 3.0 ~ 4.9 mm

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	A	B		A	B		A	B		A	B
02	2.00	4.30	11	20.00	22.30	21	40.00	42.30	31	60.00	62.30
03	4.00	6.30	12	22.00	24.30	22	42.00	44.30	32	62.00	64.30
04	6.00	8.30	13	24.00	26.30	23	44.00	46.30	33	64.00	66.30
05	8.00	10.30	14	26.00	28.30	24	46.00	48.30	34	66.00	68.30
06	10.00	12.30	15	28.00	30.30	25	48.00	50.30	35	68.00	70.30
07	12.00	14.30	16	30.00	32.30	26	50.00	52.30	36	70.00	72.30
08	14.00	16.30	17	32.00	34.30	27	52.00	54.30	37	72.00	74.30
09	16.00	18.30	18	34.00	36.30	28	54.00	56.30	38	74.00	76.30
10	18.00	20.30	19	36.00	38.30	29	56.00	58.30	39	76.00	78.30
			20	38.00	40.30	30	58.00	60.30	40	78.00	80.30

Ordering Information

CSFC2	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	-	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	C1AC
	Height Option (H)		No. of Pins per Row	Standard Plating	Pin Length (C / D)	
	<input type="checkbox"/> <input type="checkbox"/>		<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> : Gold Flash	<input type="checkbox"/> : C=7.60 / D=5.00	
	<input type="checkbox"/> <input type="checkbox"/>		<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> : Tin	<input type="checkbox"/> : C=8.00 / D=6.50	
	<input type="checkbox"/> <input type="checkbox"/>		<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> : Gold Flash / Tin	<input type="checkbox"/> : C=7.60 / D=6.50	

For special length requirement
Please contact our sales personnel

Female Header

pitch 2.00mm (0.079") | Dual row | S.M.T. | Locating peg

CSFC215 Series


Specifications

Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C



Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 LCP

All materials must meet Greenconn's requirements for environmental protection.

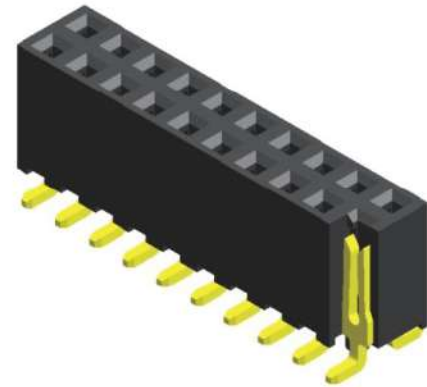

Mating with

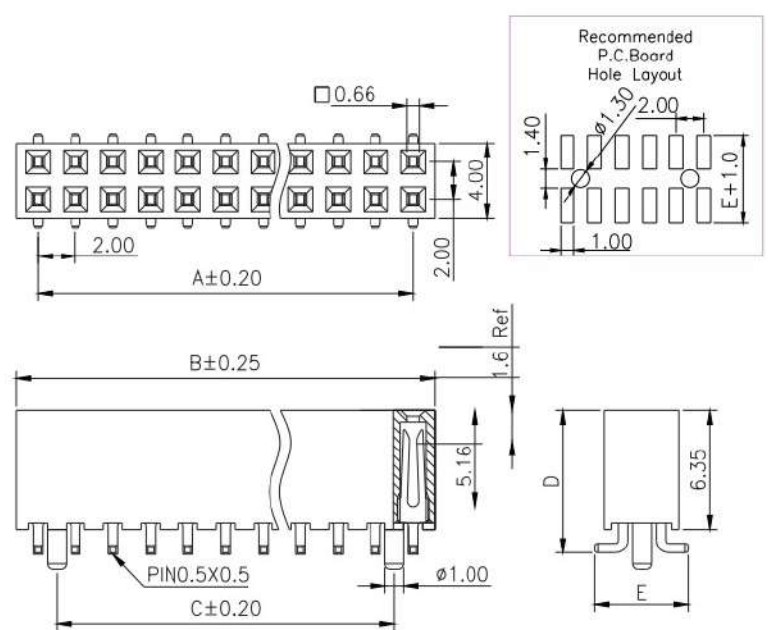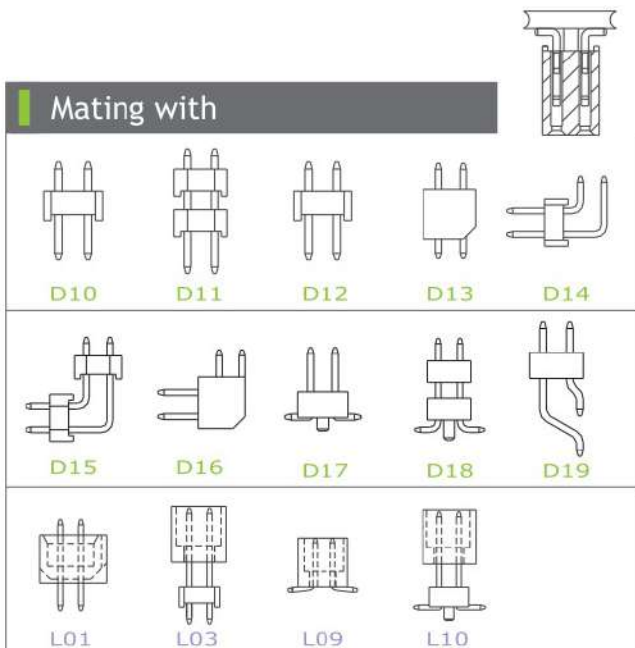

P.S. : Suggested mating pin length : 3.0 ~ 4.9 mm

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	A	B	C		A	B	C		A	B	C		A	B	C
02	2.00	4.30		11	20.00	22.30	18.00	21	40.00	42.30	38.00	31	60.00	62.30	58.00
03	4.00	6.30		12	22.00	24.30	20.00	22	42.00	44.30	40.00	32	62.00	64.30	60.00
04	6.00	8.30		13	24.00	26.30	22.00	23	44.00	46.30	42.00	33	64.00	66.30	62.00
05	8.00	10.30	6.00	14	26.00	28.30	24.00	24	46.00	48.30	44.00	34	66.00	68.30	64.00
06	10.00	12.30	8.00	15	28.00	30.30	26.00	25	48.00	50.30	46.00	35	68.00	70.30	66.00
07	12.00	14.30	10.00	16	30.00	32.30	28.00	26	50.00	52.30	48.00	36	70.00	72.30	68.00
08	14.00	16.30	12.00	17	32.00	34.30	30.00	27	52.00	54.30	50.00	37	72.00	74.30	70.00
09	16.00	18.30	14.00	18	34.00	36.30	32.00	28	54.00	56.30	52.00	38	74.00	76.30	72.00
10	18.00	20.30	16.00	19	36.00	38.30	34.00	29	56.00	58.30	54.00	39	76.00	78.30	74.00
				20	38.00	40.30	36.00	30	58.00	60.30	56.00	40	78.00	80.30	76.00

Ordering Information

CSFC2

Height Option (H)

-

No. of Pins per Row

Standard Plating

: Gold Flash

Selective Plating

: Tin

: Gold Flash / Tin

Standard Packaging : Tube

C1AC

Pin Length (B)

: D=7.60 / E=5.00

: D=7.60 / E=6.50

For special length requirement
Please contact our sales personnel

Female Header

pitch 2.00mm (0.079") | Dual row | S.M.T.

CSFC219 Series


Specifications

Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C


Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 Nylon


All materials must meet Greenconn's requirements for environmental protection.

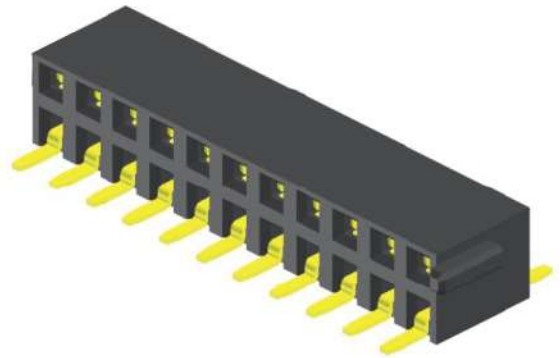

Mating with

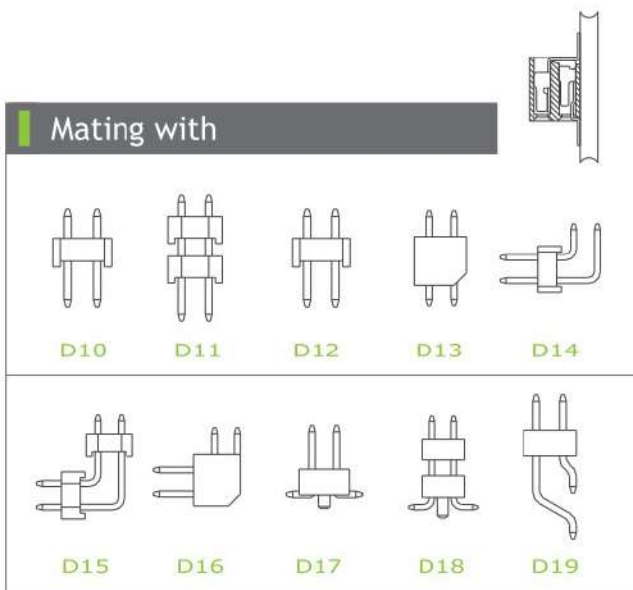

P.S. : Suggested mating pin length : 3.0 ~ 4.8 mm

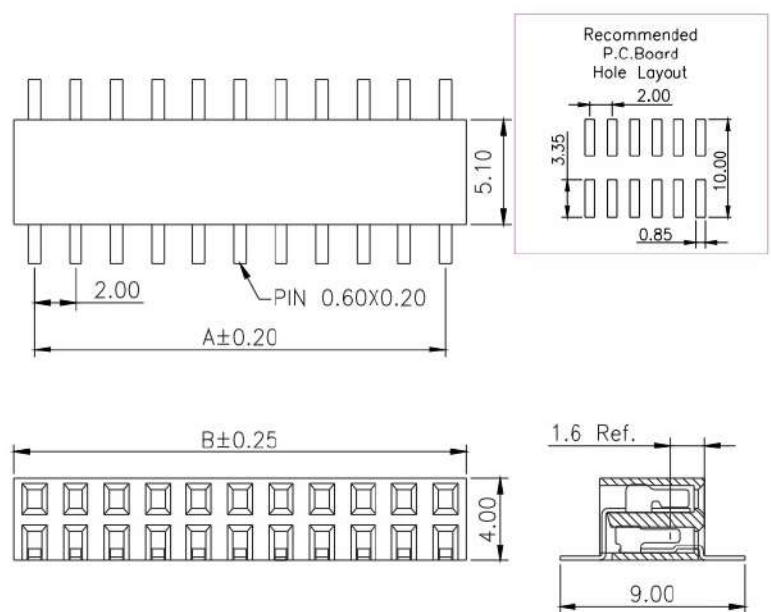

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	A	C		A	C		A	C
03	4.00	6.00	11	20.00	22.00	21	40.00	42.00
04	6.00	8.00	12	22.00	24.00	22	42.00	44.00
05	8.00	10.00	13	24.00	26.00	23	44.00	46.00
06	10.00	12.00	14	26.00	28.00	24	46.00	48.00
07	12.00	14.00	15	28.00	30.00	25	48.00	50.00
08	14.00	16.00	16	30.00	32.00			
09	16.00	18.00	17	32.00	34.00			
10	18.00	20.00	18	34.00	36.00			
			19	36.00	38.00			
			20	38.00	40.00			

Ordering Information

CSFC2	<input type="checkbox"/> <input type="checkbox"/>	-	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	A001R1AC
	Height Option (H)		No. of Pins per Row	Standard Plating	
	<input type="checkbox"/> 19		<input type="checkbox"/> 03	<input type="checkbox"/> 02 : Gold Flash	
			<input type="checkbox"/> ?	Selective Plating	
			<input type="checkbox"/> 25	<input type="checkbox"/> 01 : Tin	
				<input type="checkbox"/> 05 : Gold Flash / Tin	

Standard Packaging : Tube

Female Header

pitch 2.00mm (0.079") | Dual row | Clip

CSFE201 Series


Specifications

Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C


Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 Nylon


All materials must meet Greenconn's requirements for environmental protection.

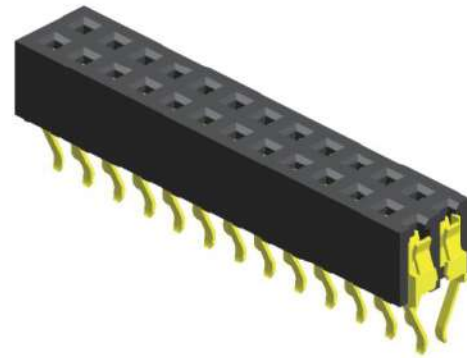

Mating with

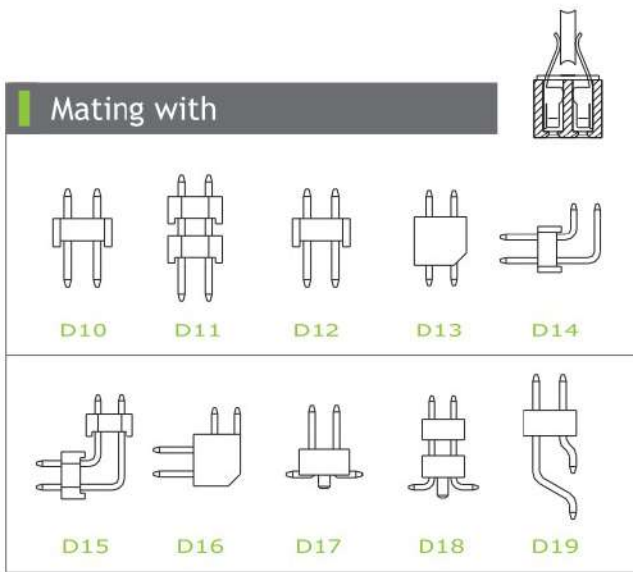

P.S. : Suggested mating pin length : 3.0 ~ 4.0 mm

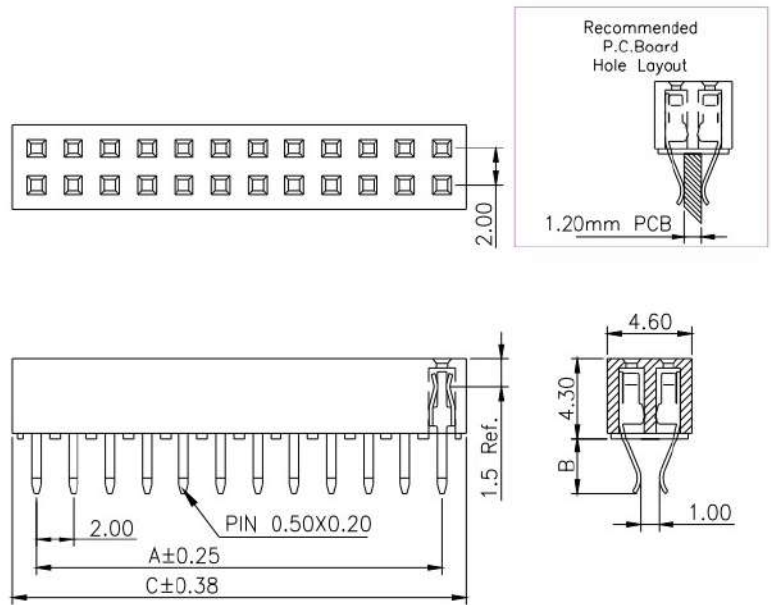

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	A	C		A	C		A	C		A	C
03	4.00	6.60	11	20.00	22.60	21	40.00	42.60	31	60.00	62.60
04	6.00	8.60	12	22.00	24.60	22	42.00	44.60	32	62.00	64.60
05	8.00	10.60	13	24.00	26.60	23	44.00	46.60	33	64.00	66.60
06	10.00	12.60	14	26.00	28.60	24	46.00	48.60	34	66.00	68.60
07	12.00	14.60	15	28.00	30.60	25	48.00	50.60	35	68.00	70.60
08	14.00	16.60	16	30.00	32.60	26	50.00	52.60	36	70.00	72.60
09	16.00	18.60	17	32.00	34.60	27	52.00	54.60	37	72.00	74.60
10	18.00	20.60	18	34.00	36.60	28	54.00	56.60	38	74.00	76.60
			19	36.00	38.60	29	56.00	58.60	39	76.00	78.60
			20	38.00	40.60	30	58.00	60.60	40	78.00	80.60

Ordering Information

CSFE2

Height Option (H)

01

-

No. of Pins per Row

03

?

40

Standard Plating

02 : Gold Flash

Selective Plating

01 : Tin

05 : Gold Flash / Tin

Standard Packaging : Tube

Pin Length (B)

002 : B=3.00

R1AC

For special length requirement
Please contact our sales personnel

Female Header

pitch 2.00mm (0.079") | Dual row | Dip

CSFF201 Series


Specifications

Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C


Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 Nylon


All materials must meet Greenconn's requirements for environmental protection.

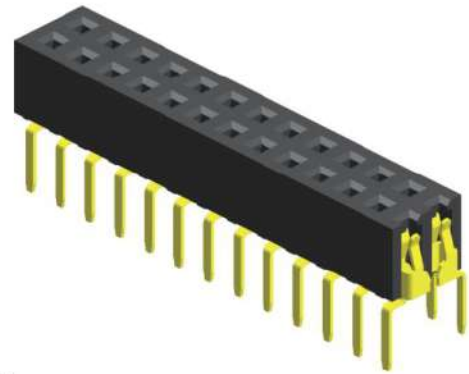

Mating with

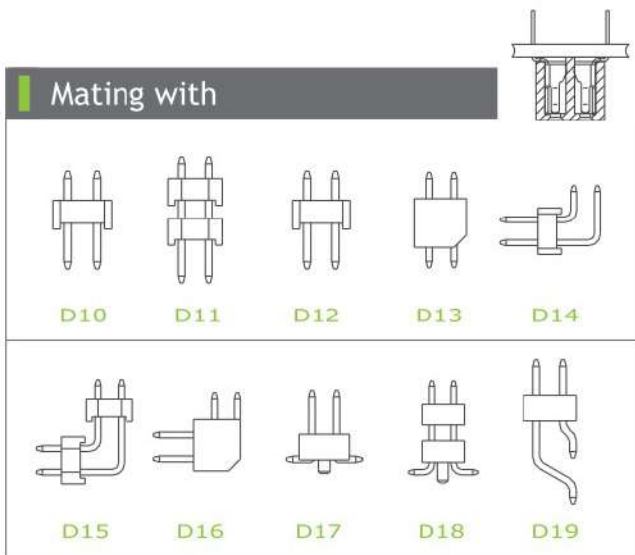

P.S. : Suggested mating pin length : 1.6 ~ 4.0 mm

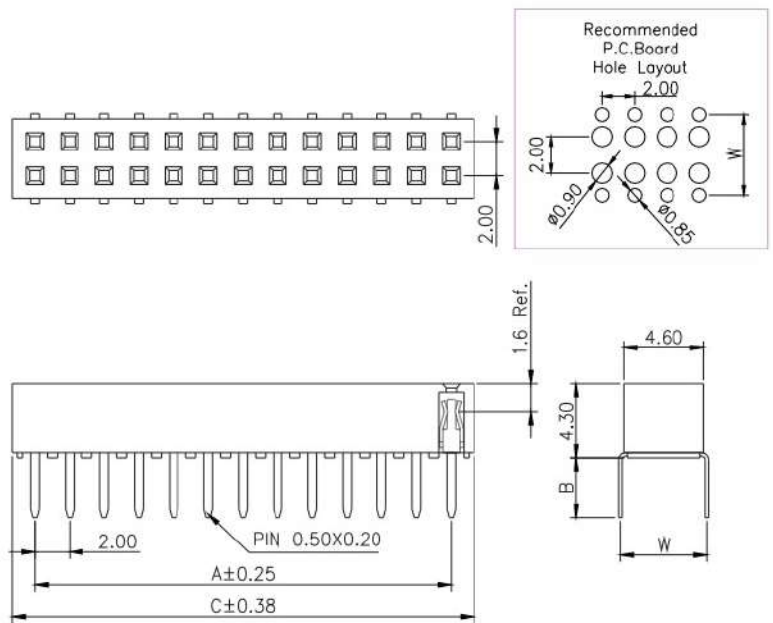

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	A	C		A	C		A	C		A	C
02	2.00	4.60	11	20.00	22.60	21	40.00	42.60	31	60.00	62.60
03	4.00	6.60	12	22.00	24.60	22	42.00	44.60	32	62.00	64.60
04	6.00	8.60	13	24.00	26.60	23	44.00	46.60	33	64.00	66.60
05	8.00	10.60	14	26.00	28.60	24	46.00	48.60	34	66.00	68.60
06	10.00	12.60	15	28.00	30.60	25	48.00	50.60	35	68.00	70.60
07	12.00	14.60	16	30.00	32.60	26	50.00	52.60	36	70.00	72.60
08	14.00	16.60	17	32.00	34.60	27	52.00	54.60	37	72.00	74.60
09	16.00	18.60	18	34.00	36.60	28	54.00	56.60	38	74.00	76.60
10	18.00	20.60	19	36.00	38.60	29	56.00	58.60	39	76.00	78.60
			20	38.00	40.60	30	58.00	60.60	40	78.00	80.60

Ordering Information

CSFF2	<input type="checkbox"/> <input type="checkbox"/>	-	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	R1AC
	Height Option (H)		No. of Pins per Row	Standard Plating	Pin Length (B/W)	
	<input type="checkbox"/> <input type="checkbox"/>		<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> : Gold Flash	<input type="checkbox"/> <input type="checkbox"/> : B=2.40 / W=5.00	
	<input type="checkbox"/> <input type="checkbox"/>		<input type="checkbox"/> <input type="checkbox"/>	Selective Plating	<input type="checkbox"/> <input type="checkbox"/> : B=3.00 / W=6.00	
	<input type="checkbox"/> <input type="checkbox"/>		<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> : Tin	For special length requirement Please contact our sales personnel	
	<input type="checkbox"/> <input type="checkbox"/>		<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> : Gold Flash / Tin		

Female Header

pitch 2.00mm (0.079") | Dual row | Dip

CSFF202 Series


Specifications

Current Rating : 2.0 Ampere
 Insulation Resistance : 1000 MΩ Min
 Dielectric Withstanding : 500V AC
 Contact Resistance : 20 mΩ Max
 Operating Temperature : -40°C to +105°C



Materials

Contact Material : Phosphor Bronze
 Insulation Material : High Temperature Thermoplastic, 94V-0 Nylon

All materials must meet Greenconn's requirements for environmental protection.

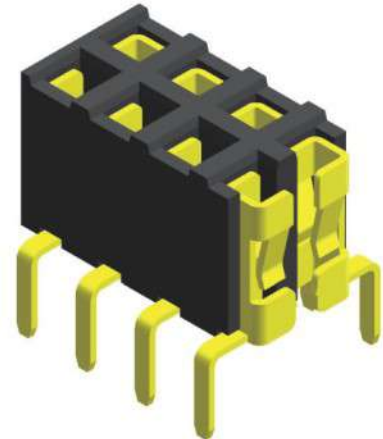

Mating with

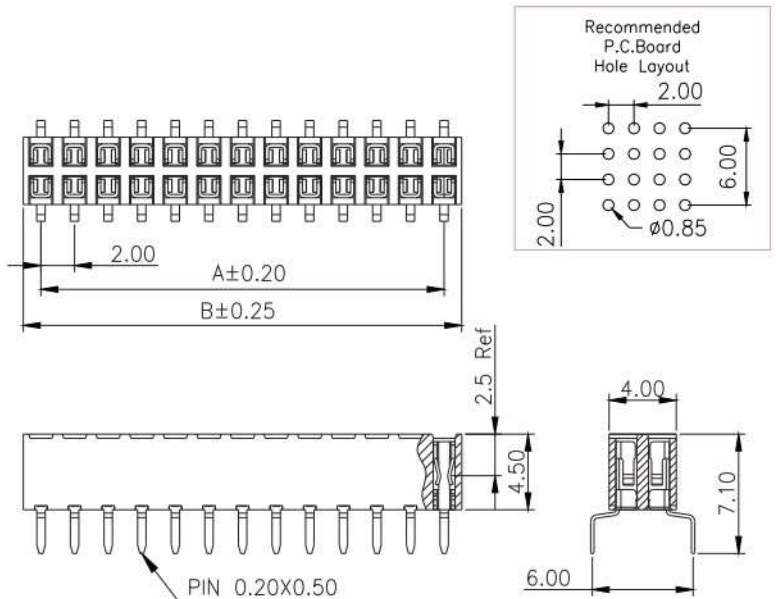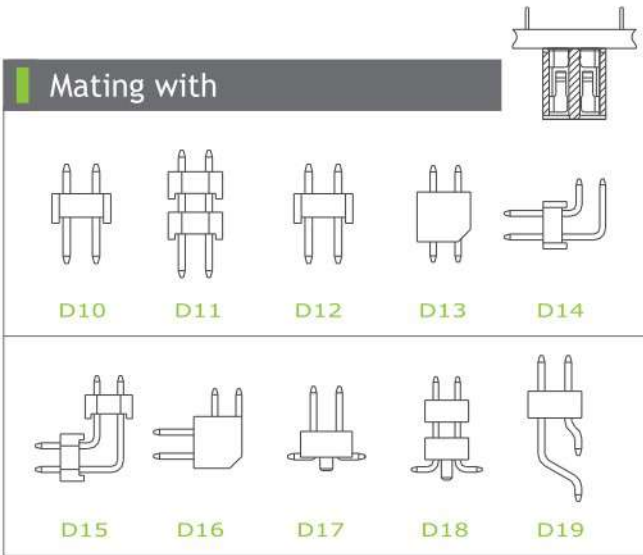

P.S. : Suggested mating pin length : < 4.5 mm

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	A	C			A	C			A	C			A	C	
02	2.00	4.10		11	20.00	22.10		21	40.00	42.10		31	60.00	62.10	
03	4.00	6.10		12	22.00	24.10		22	42.00	44.10		32	62.00	64.10	
04	6.00	8.10		13	24.00	26.10		23	44.00	46.10		33	64.00	66.10	
05	8.00	10.10		14	26.00	28.10		24	46.00	48.10		34	66.00	68.10	
06	10.00	12.10		15	28.00	30.10		25	48.00	50.10		35	68.00	70.10	
07	12.00	14.10		16	30.00	32.10		26	50.00	52.10		36	70.00	72.10	
08	14.00	16.10		17	32.00	34.10		27	52.00	54.10		37	72.00	74.10	
09	16.00	18.10		18	34.00	36.10		28	54.00	56.10		38	74.00	76.10	
10	18.00	20.10		19	36.00	38.10		29	56.00	58.10		39	76.00	78.10	
				20	38.00	40.10		30	58.00	60.10		40	78.00	80.10	

Ordering Information

Standard Packaging : Tube

CSFF2 - A001R1AC
 Height Option (H) No. of Pins per Row Standard Plating : Gold Flash
 : Tin
 : Gold Flash / Tin

Female Header

pitch 2.00mm (0.079") | Triple row | Dip | Board spacer

CSFA302 Series


Specifications

Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C


Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 Nylon





All materials must meet Greenconn's requirements for environmental protection.

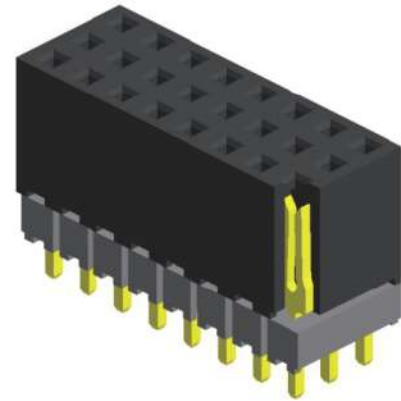

Mating with

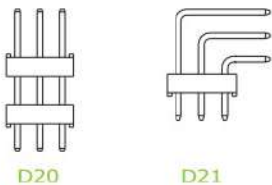

P.S. : Suggested mating pin length : 3.0 ~ 4.9 mm

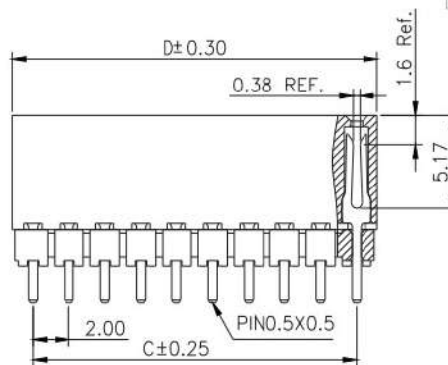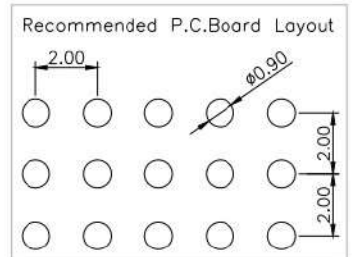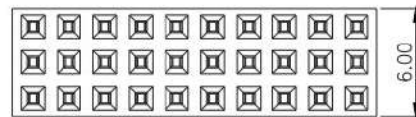

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	C	D		C	D		C	D		C	D
02	2.00	4.30	11	20.00	22.30	21	40.00	42.30	31	60.00	62.30
03	4.00	6.30	12	22.00	24.30	22	42.00	44.30	32	62.00	64.30
04	6.00	8.30	13	24.00	26.30	23	44.00	46.30	33	64.00	66.30
05	8.00	10.30	14	26.00	28.30	24	46.00	48.30	34	66.00	68.30
06	10.00	12.30	15	28.00	30.30	25	48.00	50.30	35	68.00	70.30
07	12.00	14.30	16	30.00	32.30	26	50.00	52.30	36	70.00	72.30
08	14.00	16.30	17	32.00	34.30	27	52.00	54.30	37	72.00	74.30
09	16.00	18.30	18	34.00	36.30	28	54.00	56.30	38	74.00	76.30
10	18.00	20.30	19	36.00	38.30	29	56.00	58.30	39	76.00	78.30
			20	38.00	40.30	30	58.00	60.30	40	78.00	80.30

Ordering Information

CSFA3
 Height Option (H)
 02

-
 No. of Pins per Row
 02
 ?
 40

Standard Plating
 02 : Gold Flash

Selective Plating
 01 : Tin
 05 : Gold Flash / Tin

Standard Packaging : Tube

Pin Length (A/B)
 001 : A=8.35 / B=2.08

For special length requirement
 Please contact our sales personnel

Female Header

pitch 2.00mm (0.079") | Triple row | Dip

CSFA304 Series


Specifications

Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C


Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 Nylon





All materials must meet Greenconn's requirements for environmental protection.

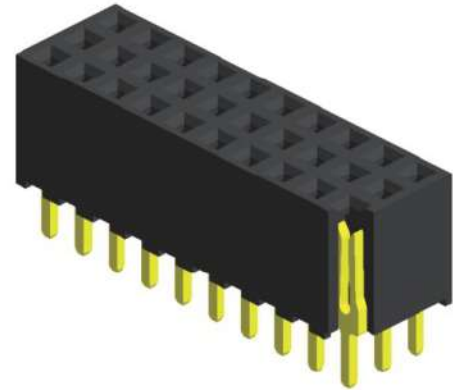

Mating with



P.S. : Suggested mating pin length : 3.0 ~ 4.9 mm

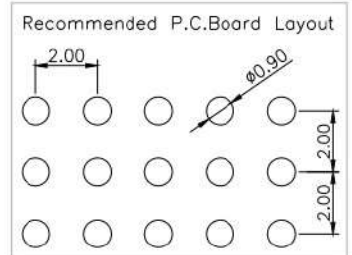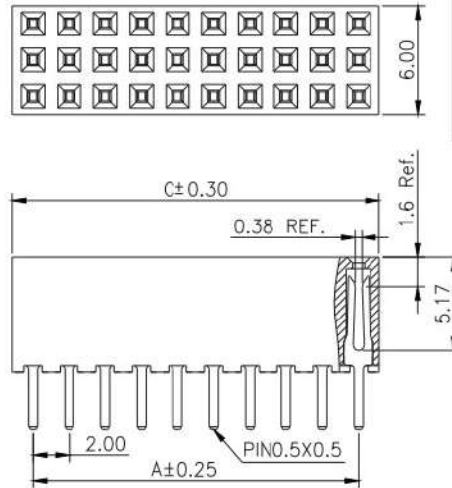

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	C	D		C	D		C	D		C	D
02	2.00	4.30	11	20.00	22.30	21	40.00	42.30	31	60.00	62.30
03	4.00	6.30	12	22.00	24.30	22	42.00	44.30	32	62.00	64.30
04	6.00	8.30	13	24.00	26.30	23	44.00	46.30	33	64.00	66.30
05	8.00	10.30	14	26.00	28.30	24	46.00	48.30	34	66.00	68.30
06	10.00	12.30	15	28.00	30.30	25	48.00	50.30	35	68.00	70.30
07	12.00	14.30	16	30.00	32.30	26	50.00	52.30	36	70.00	72.30
08	14.00	16.30	17	32.00	34.30	27	52.00	54.30	37	72.00	74.30
09	16.00	18.30	18	34.00	36.30	28	54.00	56.30	38	74.00	76.30
10	18.00	20.30	19	36.00	38.30	29	56.00	58.30	39	76.00	78.30
			20	38.00	40.30	30	58.00	60.30	40	78.00	80.30

Ordering Information

CSFA3 Height Option (H)

- No. of Pins per Row

Standard Plating

: Gold Flash

Selective Plating

: Tin

: Gold Flash / Tin

Standard Packaging : Tube

R1AC

Pin Length (B)

: B=3.20

: B=2.30

For special length requirement
Please contact our sales personnel

Female Header

pitch 2.00mm (0.079") | Four row | Dip

CSFA404 Series


Specifications

Current Rating :	3.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C


Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 Nylon

All materials must meet Greenconn's requirements for environmental protection.


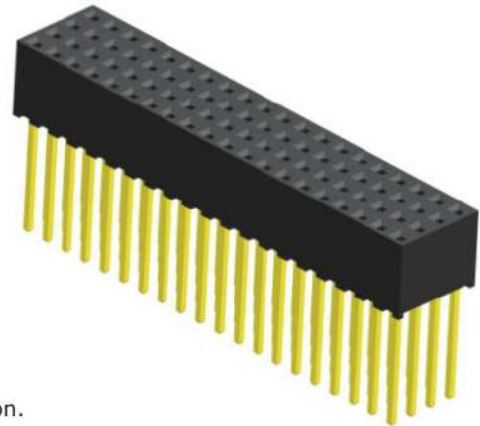


Mating with



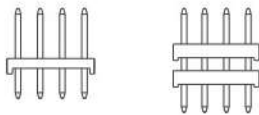


D22

D23

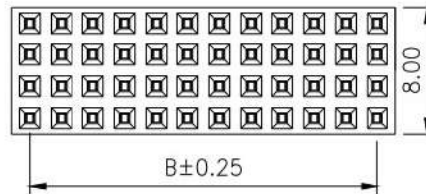

Recommended P.C.Board Layout

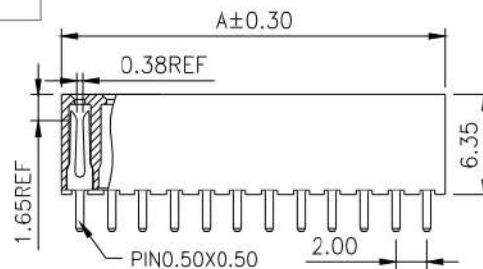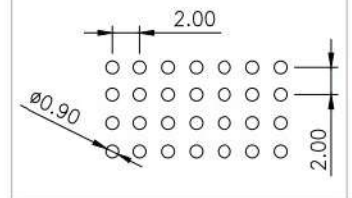

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	A	B		A	B		A	B		A	B
02	2.00	4.30	11	20.00	22.30	21	40.00	42.30	31	60.00	62.30
03	4.00	6.30	12	22.00	24.30	22	42.00	44.30	32	62.00	64.30
04	6.00	8.30	13	24.00	26.30	23	44.00	46.30	33	64.00	66.30
05	8.00	10.30	14	26.00	28.30	24	46.00	48.30	34	66.00	68.30
06	10.00	12.30	15	28.00	30.30	25	48.00	50.30	35	68.00	70.30
07	12.00	14.30	16	30.00	32.30	26	50.00	52.30	36	70.00	72.30
08	14.00	16.30	17	32.00	34.30	27	52.00	54.30	37	72.00	74.30
09	16.00	18.30	18	34.00	36.30	28	54.00	56.30	38	74.00	76.30
10	18.00	20.30	19	36.00	38.30	29	56.00	58.30	39	76.00	78.30
			20	38.00	40.30	30	58.00	60.30	40	78.00	80.30

Ordering Information

Standard Packaging : Box

CSFA4	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	-	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	A001R1AA
	Height Option (H)		No. of Pins per Row	Standard Plating	
	<input type="checkbox"/> 04		<input type="checkbox"/> 02	<input type="checkbox"/> 02 : Gold Flash	
			<input type="checkbox"/> 40	Selective Plating	
				<input type="checkbox"/> 01 : Tin	
				<input type="checkbox"/> 05 : Gold Flash / Tin	

Female Header

pitch 2.00mm (0.079") | Four row | Dip | Board spacer

CSFA405 Series


Specifications

Current Rating :	3.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C


Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 Nylon

All materials must meet Greenconn's requirements for environmental protection.

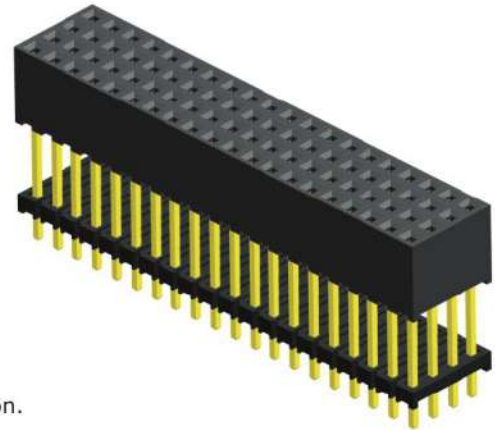


Mating with





D22

D23

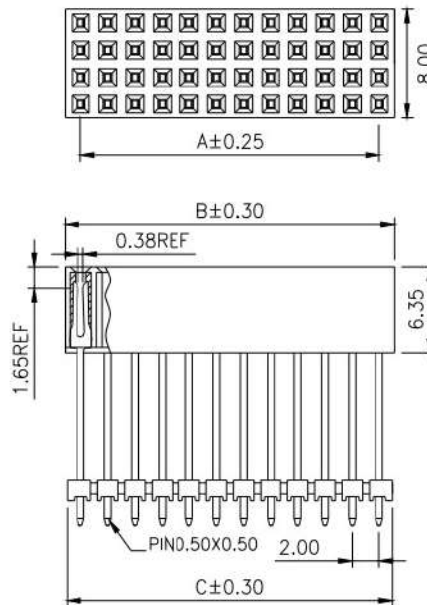

Recommended P.C.Board Layout



No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	A	B	C		A	B	C		A	B	C		A	B	C
02	2.00	4.30	4.00	11	20.00	22.30	22.00	21	40.00	42.30	42.00	31	60.00	62.30	62.00
03	4.00	6.30	6.00	12	22.00	24.30	24.00	22	42.00	44.30	44.00	32	62.00	64.30	64.00
04	6.00	8.30	8.00	13	24.00	26.30	26.00	23	44.00	46.30	46.00	33	64.00	66.30	66.00
05	8.00	10.30	10.00	14	26.00	28.30	28.00	24	46.00	48.30	48.00	34	66.00	68.30	68.00
06	10.00	12.30	12.00	15	28.00	30.30	30.00	25	48.00	50.30	50.00	35	68.00	70.30	70.00
07	12.00	14.30	14.00	16	30.00	32.30	32.00	26	50.00	52.30	52.00	36	70.00	72.30	72.00
08	14.00	16.30	16.00	17	32.00	34.30	34.00	27	52.00	54.30	54.00	37	72.00	74.30	74.00
09	16.00	18.30	18.00	18	34.00	36.30	36.00	28	54.00	56.30	56.00	38	74.00	76.30	76.00
10	18.00	20.30	20.00	19	36.00	38.30	38.00	29	56.00	58.30	58.00	39	76.00	78.30	78.00
				20	38.00	40.30	40.00	30	58.00	60.30	60.00	40	78.00	80.30	80.00

Ordering Information

Standard Packaging : Box

CSFA4	<input type="checkbox"/> <input checked="" type="checkbox"/>	-	<input type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/> <input checked="" type="checkbox"/>	A001R1AA
	Height Option (H)		No. of Pins per Row	Standard Plating	
	<input type="checkbox"/> <input checked="" type="checkbox"/>		<input type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/> <input checked="" type="checkbox"/> : Gold Flash	
			<input type="checkbox"/> <input checked="" type="checkbox"/>	Selective Plating	
			<input type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/> <input checked="" type="checkbox"/> : Tin	
			<input type="checkbox"/> <input checked="" type="checkbox"/>	<input type="checkbox"/> <input checked="" type="checkbox"/> : Gold Flash / Tin	

Mini Jumper

2.00mm pitch (0.079")

CSFG106 Series





Specifications

Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	1000V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C

Materials

Contact Material :	Brass
Insulation Material :	High Temperature Thermoplastic, 94V-0 PBT

All materials must meet Greenconn's requirements for environmental protection.

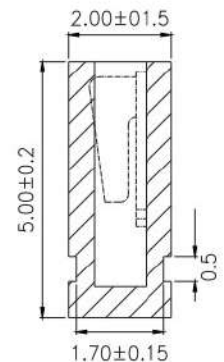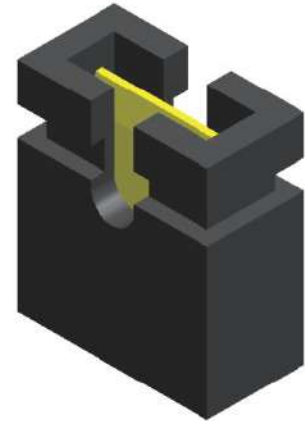

No. of Pins/Row	Dimension Information		

Ordering Information

Standard Packaging : PE bag

CSFG1	<input type="text" value="XX"/>	-	<input type="text" value="XX"/>	<input type="text" value="XX"/>	A001A1BN
	Height Option (H)		No. of Pins per Row	Standard Plating	
	<input type="text" value="06"/>		<input type="text" value="02"/>	<input type="text" value="02"/> : Gold Flash	
				Selective Plating	
				<input type="text" value="01"/> : Tin	

Box header

2.00mm pitch (0.079") | Dip | Polarization

GPFA213 Series


Specifications

Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C



Materials

Contact Material :	Brass
Insulation Material :	High Temperature Thermoplastic, 94V-0 LCP

All materials must meet Greenconn's requirements for environmental protection.

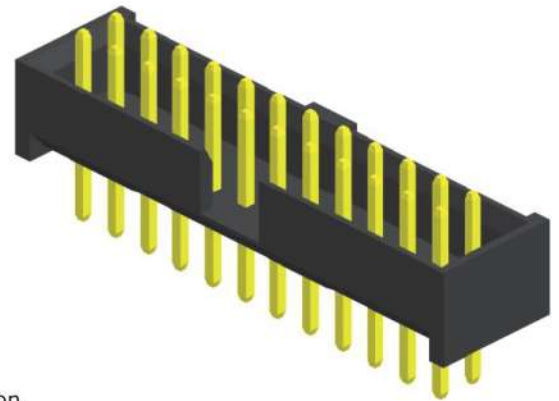

Mating with

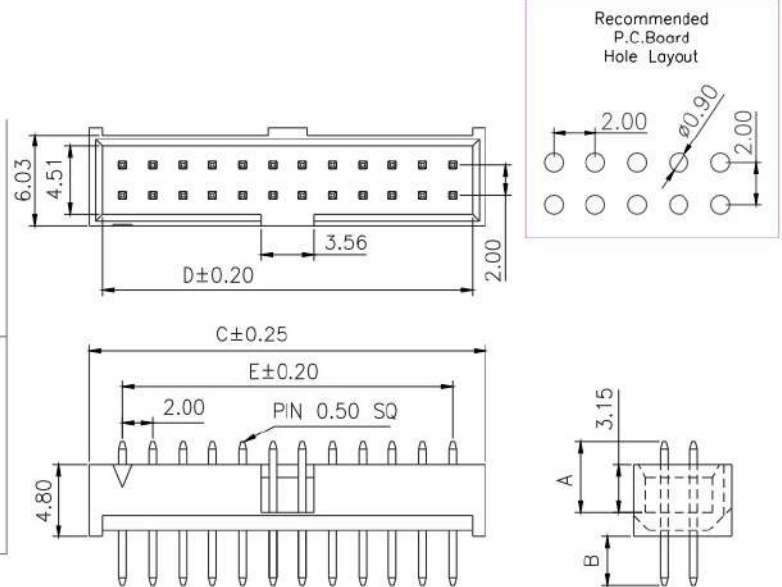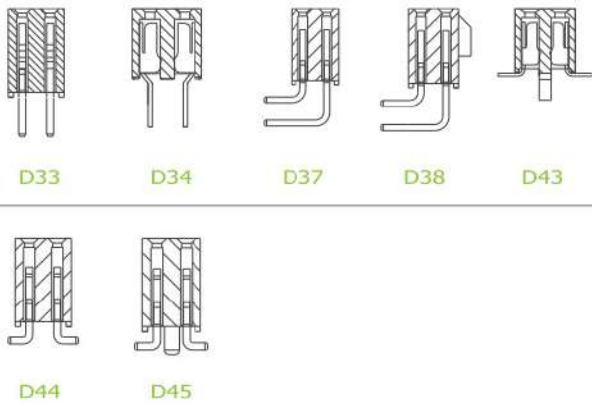

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	C	D	E		C	D	E		C	D	E
				11	24.38	22.62	20.00	21	44.38	42.62	40.00
				12	26.38	24.62	22.00	22	46.38	44.62	42.00
				13	28.38	26.62	24.00	23	48.38	46.62	44.00
04	10.38	8.62	6.00	14	30.38	28.62	26.00	24	50.38	48.62	46.00
05	12.38	10.62	8.00	15	32.38	30.62	28.00	25	52.38	50.62	48.00
06	14.38	12.62	10.00	16	34.38	32.62	30.00				
07	16.38	14.62	12.00	17	36.38	34.62	32.00				
08	18.38	16.62	14.00	18	38.38	36.62	34.00				
09	20.38	18.62	16.00	19	40.38	38.62	36.00				
10	22.38	20.62	18.00	20	42.38	40.62	38.00				

Ordering Information

GPFA2	<input type="checkbox"/> <input type="checkbox"/>	-	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	C1BC
	Height Option (H)		No. of Pins per Row	Standard Plating	Pin Length (A/B)	
	<input type="checkbox"/> 13		<input type="checkbox"/> 04	<input type="checkbox"/> 02 : Gold Flash	<input type="checkbox"/> 001 : A=4.67 / B=3.23	
			<input type="checkbox"/> 25	Selective Plating		
				<input type="checkbox"/> 01 : Tin		
				<input type="checkbox"/> 05 : Gold Flash / Tin		

For special length requirement
Please contact our sales personnel

Box header

2.00mm pitch (0.079") | Dip | Polarization

GPFA220 Series


Specifications

Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C

Materials

Contact Material :	Brass
Insulation Material :	High Temperature Thermoplastic, 94V-0 Nylon


All materials must meet Greenconn's requirements for environmental protection.

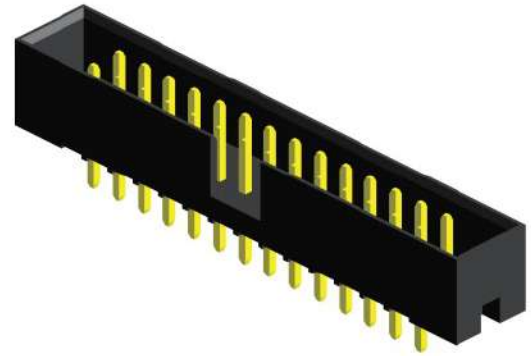






Mating with



D33 D34 D37 D38 D44



L12

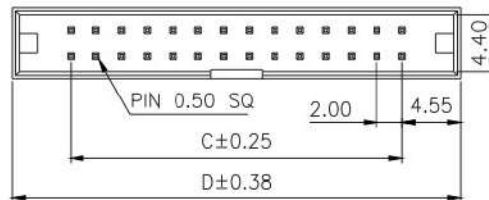

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	C	D		C	D		C	D
			11	20.00	29.10	21	40.00	49.10
			12	22.00	31.10	22	42.00	51.10
			13	24.00	33.10	23	44.00	53.10
04	6.00	15.10	14	26.00	35.10	24	46.00	55.10
05	8.00	17.10	15	28.00	37.10	25	48.00	57.10
06	10.00	19.10	16	30.00	39.10			
07	12.00	21.10	17	32.00	41.10			
08	14.00	23.10	18	34.00	43.10			
09	16.00	25.10	19	36.00	45.10			
10	18.00	27.10	20	38.00	47.10			

Ordering Information

GPFA2

Height Option (H)

20

-

No. of Pins per Row

04

?

25

Standard Plating

02 : Gold Flash

Selective Plating

01 : Tin

05 : Gold Flash / Tin

Standard Packaging : Tube

A Pin Length (A)

001 : A=2.50

R1BC

For special length requirement
Please contact our sales personnel

Box header

pitch 2.00mm (0.079") | Dip | Board spacer | Polarization

GPFA221 Series


Specifications

Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C



Materials

Contact Material :	Brass
Insulation Material :	High Temperature Thermoplastic, 94V-0 Nylon

All materials must meet Greenconn's requirements for environmental protection.

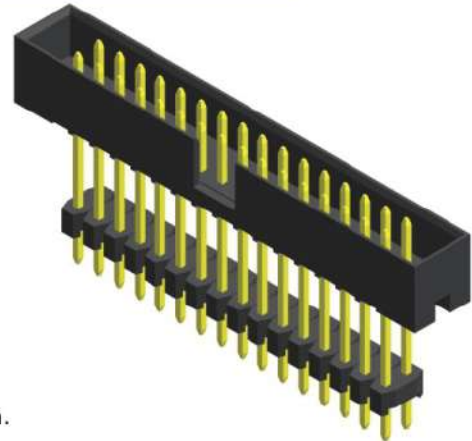

Mating with

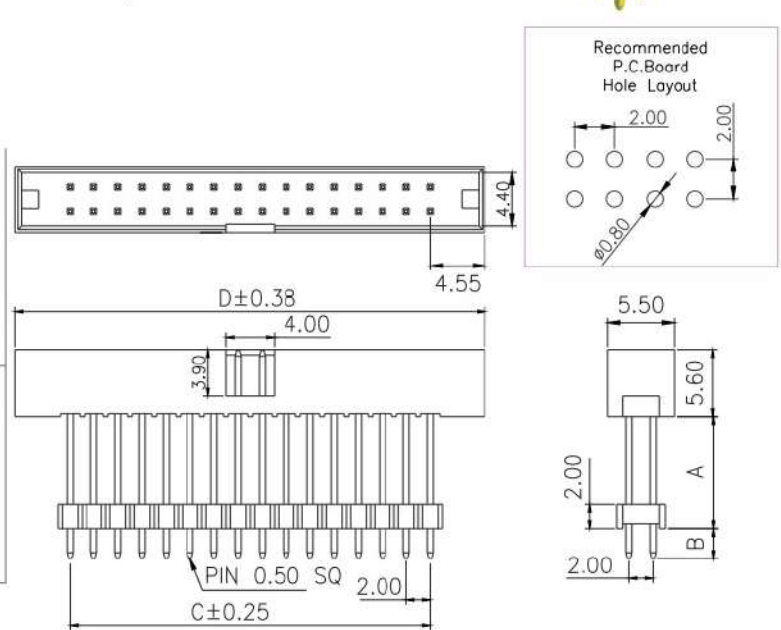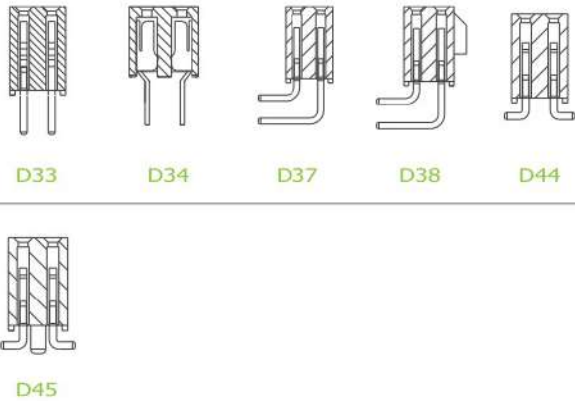

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	C	D		C	D		C	D
			11	20.00	29.10	21	40.00	49.10
			12	22.00	31.10	22	42.00	51.10
			13	24.00	33.10	23	44.00	53.10
04	6.00	15.10	14	26.00	35.10	24	46.00	55.10
05	8.00	17.10	15	28.00	37.10	25	48.00	57.10
06	10.00	19.10	16	30.00	39.10			
07	12.00	21.10	17	32.00	41.10			
08	14.00	23.10	18	34.00	43.10			
09	16.00	25.10	19	36.00	45.10			
10	18.00	27.10	20	38.00	47.10			

Ordering Information

GPFA2

Height Option (H)

21

-

No. of Pins per Row

04

?

25

Standard Plating

02 : Gold Flash

Selective Plating

01 : Tin

05 : Gold Flash / Tin

Standard Packaging : Tube

R1BC

A Pin Length (A/B)

003 : A=15.0 / B=2.80

024 : A=17.5 / B=5.50

For special length requirement
Please contact our sales personnel

Ejector Box header

pitch 2.00mm (0.079") | Dip | Polarization | with Lock

GPFA233 Series






Specifications

Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C

Materials

Contact Material :	Brass
Insulation Material :	High Temperature Thermoplastic, 94V-0 Nylon

All materials must meet Greenconn's requirements for environmental protection.

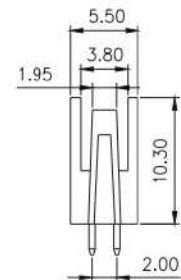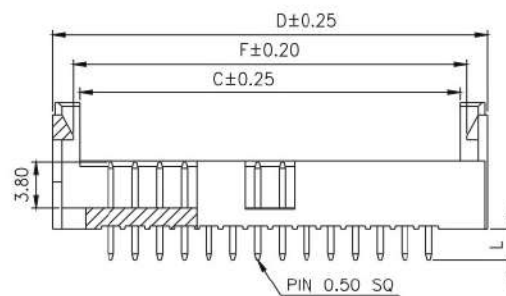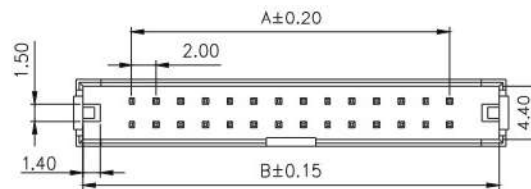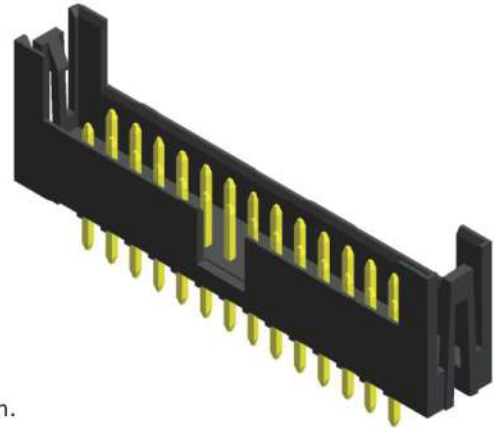

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information				
	A	B	C	D	F
05	8.00	16.00	12.20	17.50	14.20
06	10.00	18.00	14.20	19.50	16.20
07	12.00	20.00	16.20	21.50	18.20
08	14.00	22.00	18.20	23.50	20.20
09	16.00	24.00	20.20	25.50	22.20
10	18.00	26.00	22.20	27.50	24.20
11	20.00	28.00	24.20	29.50	26.20
12	22.00	30.00	26.20	31.50	28.20
13	24.00	32.00	28.20	33.50	30.20

No. of Pins/Row	Dimension Information				
	A	B	C	D	F
14	26.00	34.00	30.20	35.50	32.20
15	28.00	36.00	32.20	37.50	34.20
16	30.00	38.00	34.20	39.50	36.20
17	32.00	40.00	36.20	41.50	38.20
18	34.00	42.00	38.20	43.50	40.20
19	36.00	44.00	40.20	45.50	42.20
20	38.00	46.00	42.20	47.50	44.20
21	40.00	48.00	44.20	49.50	46.20
22	42.00	50.00	46.20	51.50	48.20
23	44.00	52.00	48.20	53.50	50.20
24	46.00	54.00	50.20	55.50	52.20
25	48.00	56.00	52.20	57.50	54.20

Ordering Information

GPFA2	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	-	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	R1BC
	Height Option (H)		No. of Pins per Row	Standard Plating	Pin Length (L)	
	<input type="text" value="33"/>		<input type="text" value="05"/>	<input type="text" value="02"/> : Gold Flash	<input type="text" value="001"/> : L=2.50	
			<input type="text" value="25"/>	Selective Plating		
				<input type="text" value="01"/> : Tin		
				<input type="text" value="05"/> : Gold Flash / Tin		

For special length requirement
Please contact our sales personnel

Ejector Box header

pitch 2.00mm (0.079") | Dip | Polarization | with Lock

GPFA240 Series


Specifications

Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C

Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 Nylon


All materials must meet Greenconn's requirements for environmental protection.

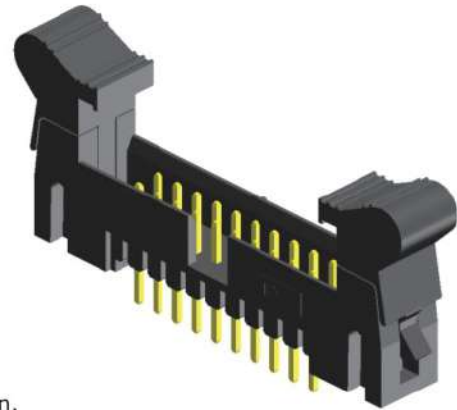

Mating with



D37

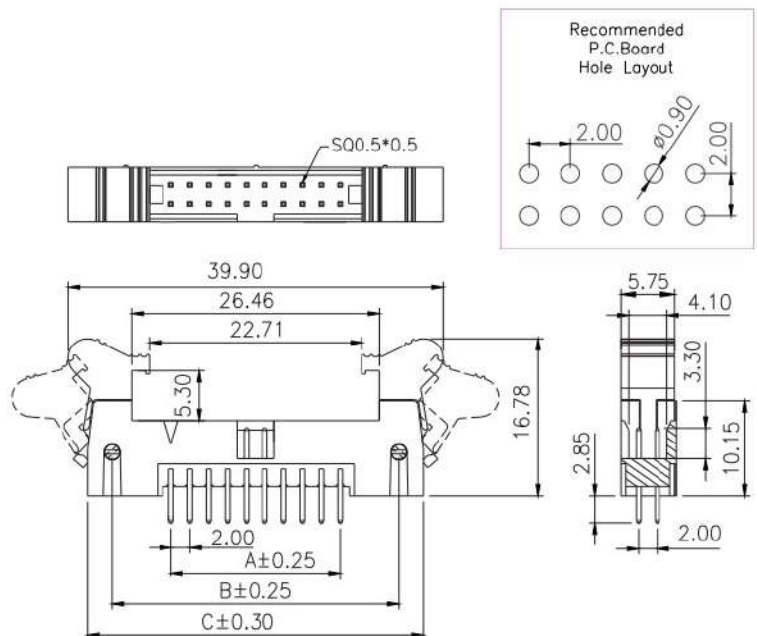

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	A	B	C		A	B	C
10	18.00	30.60	35.75	20	38.00	50.60	55.75
				15	28.00	40.60	45.75
				16	30.00	42.60	47.75
				17	32.00	44.60	49.75
				18	34.00	46.60	51.75
				19	36.00	48.60	53.75

Ordering Information

GPFA2

Height Option (H)

-

No. of Pins per Row

Standard Plating

: Gold Flash

Selective Plating

: Tin

: Gold Flash / Tin

Standard Packaging : Box

A001R1AA

Ejector Box header

pitch 2.00mm (0.079") | R/A | Polarization | with Lock

GPFB218 Series



Specifications

Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C

Materials

Contact Material :	Brass
Insulation Material :	High Temperature Thermoplastic, 94V-0 Nylon

All materials must meet Greenconn's requirements for environmental protection.

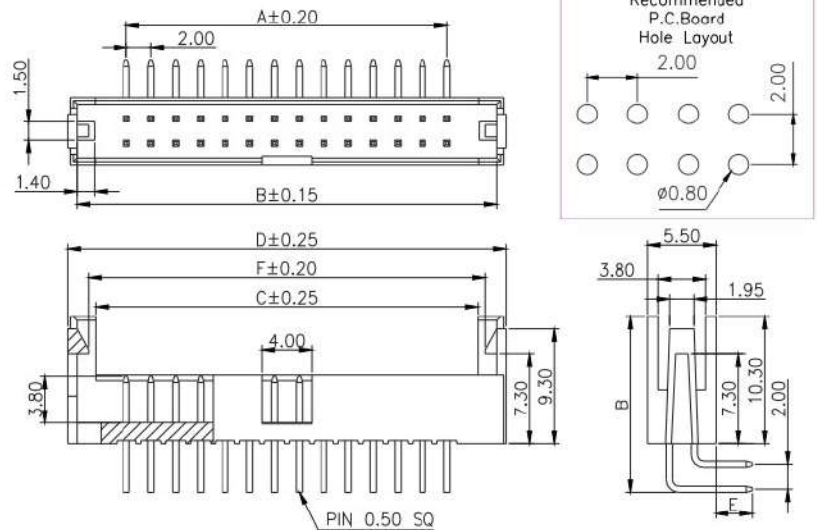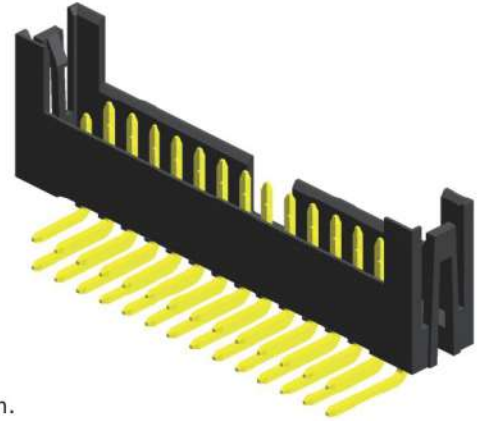

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information				
	A	B	C	D	F
05	8.00	16.00	12.20	17.50	14.20
06	10.00	18.00	14.20	19.50	16.20
07	12.00	20.00	16.20	21.50	18.20
08	14.00	22.00	18.20	23.50	20.20
09	16.00	24.00	20.20	25.50	22.20
10	18.00	26.00	22.20	27.50	24.20
11	20.00	28.00	24.20	29.50	26.20
12	22.00	30.00	26.20	31.50	28.20
13	24.00	32.00	28.20	33.50	30.20

No. of Pins/Row	Dimension Information				
	A	B	C	D	F
14	26.00	34.00	30.20	35.50	32.20
15	28.00	36.00	32.20	37.50	34.20
16	30.00	38.00	34.20	39.50	36.20
17	32.00	40.00	36.20	41.50	38.20
18	34.00	42.00	38.20	43.50	40.20
19	36.00	44.00	40.20	45.50	42.20
20	38.00	46.00	42.20	47.50	44.20
21	40.00	48.00	44.20	49.50	46.20
22	42.00	50.00	46.20	51.50	48.20
23	44.00	52.00	48.20	53.50	50.20
24	46.00	54.00	50.20	55.50	52.20
25	48.00	56.00	52.20	57.50	54.20

Ordering Information

GPFB2	<input type="checkbox"/> <input type="checkbox"/>	-	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	R1BC
	Height Option (H)		No. of Pins per Row	Standard Plating	Pin Length (B/E)	
	<input type="checkbox"/> 18		<input type="checkbox"/> 05	<input type="checkbox"/> 02 : Gold Flash	<input type="checkbox"/> 001 : B=14.2 / E=3.00	
			<input type="checkbox"/> ?	Selective Plating		
			<input type="checkbox"/> 25	<input type="checkbox"/> 01 : Tin		
				<input type="checkbox"/> 05 : Gold Flash / Tin		

For special length requirement
Please contact our sales personnel

Box header

pitch 2.00mm (0.079") | R/A | Polarization

GPFB220 Series


Specifications

Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C






Materials

Contact Material :	Brass
Insulation Material :	High Temperature Thermoplastic, 94V-0 Nylon

All materials must meet Greenconn's requirements for environmental protection.

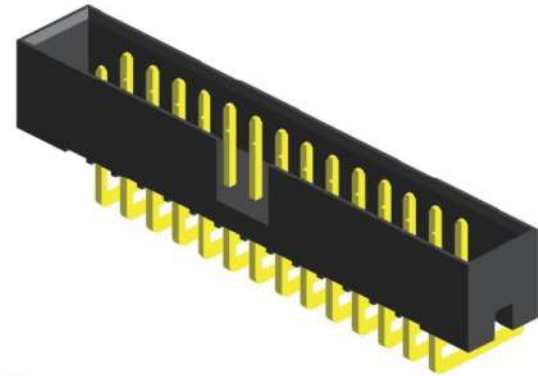

Mating with

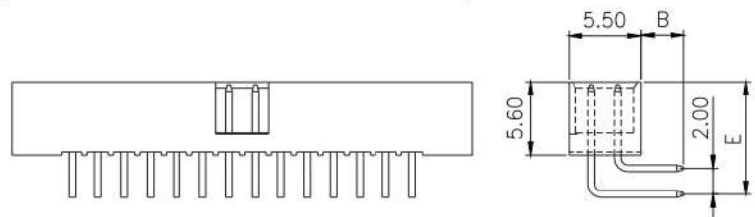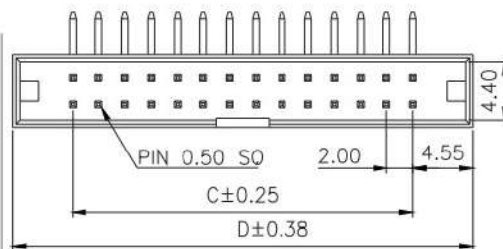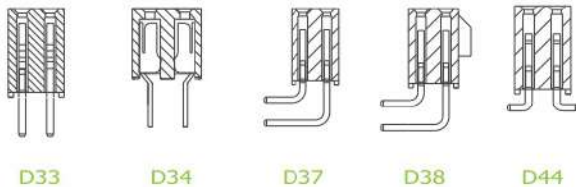

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	C	D		C	D		C	D
05	8.00	17.10	11	20.00	29.10	21	40.00	49.10
06	10.00	19.10	12	22.00	31.10	22	42.00	51.10
07	12.00	21.10	13	24.00	33.10	23	44.00	53.10
08	14.00	23.10	14	26.00	35.10	24	46.00	55.10
09	16.00	25.10	15	28.00	37.10	25	48.00	57.10
10	18.00	27.10	16	30.00	39.10			
			17	32.00	41.10			
			18	34.00	43.10			
			19	36.00	45.10			
			20	38.00	47.10			

Ordering Information

GPFB2	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	-	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	R1BC
	Height Option (H)		No. of Pins per Row	Standard Plating	Pin Length (B/E)	
	<input type="text" value="20"/>		<input type="text" value="05"/>	<input type="text" value="02"/> : Gold Flash	<input type="text" value="002"/> : B=3.00 / E=9.12	
			<input type="text" value="25"/>	Selective Plating		
				<input type="text" value="01"/> : Tin		
				<input type="text" value="05"/> : Gold Flash / Tin		

For special length requirement
Please contact our sales personnel

Box header

pitch 2.00mm (0.079") | S.M.T. | Locating peg | Polarization

GPFC214 Series


Specifications

Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C






Materials

Contact Material :	Brass
Insulation Material :	High Temperature Thermoplastic, 94V-0 Nylon

All materials must meet Greenconn's requirements for environmental protection.

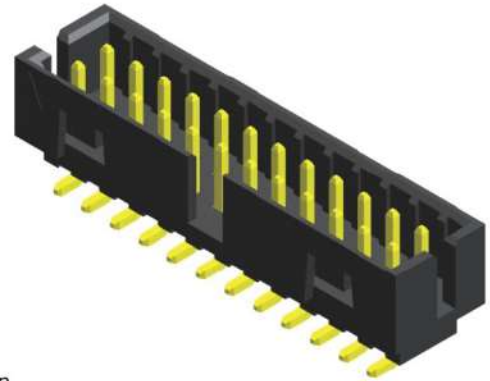

Mating with

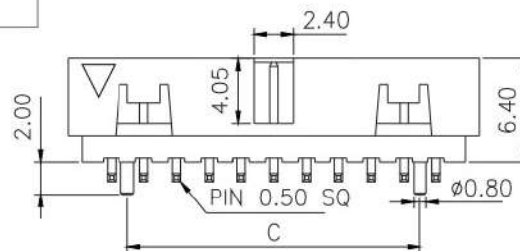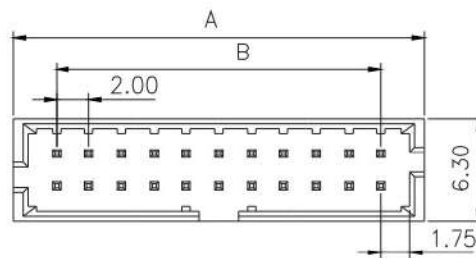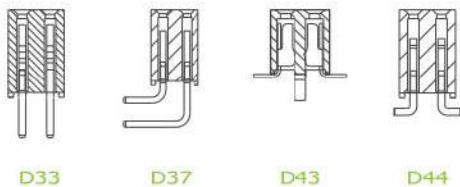

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	A	B	C		A	B	C		A	B	C
				11	24.65	20.00	18.00	21	44.65	40.00	38.00
				12	26.65	22.00	20.00	22	46.65	42.00	40.00
				13	28.65	24.00	22.00	23	48.65	44.00	42.00
04	10.65	6.00	4.00	14	30.65	26.00	24.00	24	50.65	46.00	44.00
05	12.65	8.00	6.00	15	32.65	28.00	26.00	25	52.65	48.00	46.00
06	14.65	10.00	8.00	16	34.65	30.00	28.00				
07	16.65	12.00	10.00	17	36.65	32.00	30.00				
08	18.65	14.00	12.00	18	38.65	34.00	32.00				
09	20.65	16.00	14.00	19	40.65	36.00	34.00				
10	22.65	18.00	16.00	20	42.65	38.00	36.00				

Ordering Information

GPFC2

Height Option (H)

-

No. of Pins per Row

Standard Plating

: Gold Flash

Selective Plating

: Tin

: Gold Flash / Tin

Standard Packaging : Tube

B001R1BC

Box header

pitch 2.00mm (0.079") | S.M.T. | Polarization

GPFC220 Series


Specifications

Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C

Materials

Contact Material :	Brass
Insulation Material :	High Temperature Thermoplastic, 94V-0 Nylon


All materials must meet Greenconn's requirements for environmental protection.

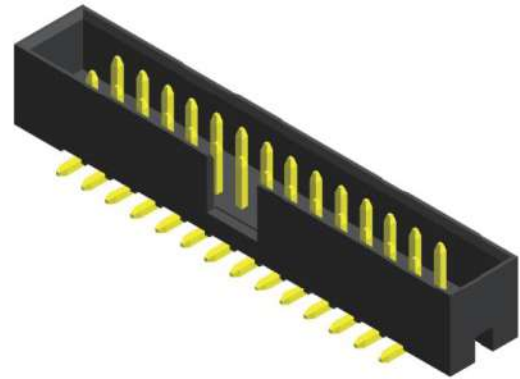






Mating with



D33 D34 D37 D38 D44



D45

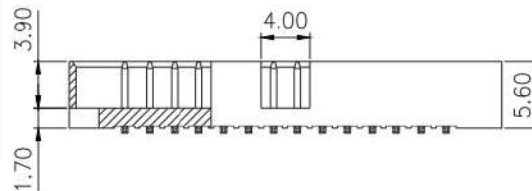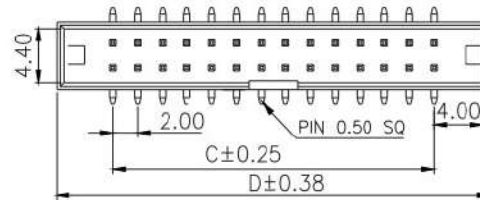

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	C	D		C	D		C	D
			11	20.00	29.10	21	40.00	49.10
			12	22.00	31.10	22	42.00	51.10
			13	24.00	33.10	23	44.00	53.10
04	6.00	15.10	14	26.00	35.10	24	46.00	55.10
05	8.00	17.10	15	28.00	37.10	25	48.00	57.10
06	10.00	19.10	16	30.00	39.10			
07	12.00	21.10	17	32.00	41.10			
08	14.00	23.10	18	34.00	43.10			
09	16.00	25.10	19	36.00	45.10			
10	18.00	27.10	20	38.00	47.10			

Ordering Information

GPFC2

Height Option (H)

20

-

No. of Pins per Row

04

?

25

Standard Plating

02 : Gold Flash

Selective Plating

01 : Tin

05 : Gold Flash / Tin

Standard Packaging : Tube

Pin Length (W)

001 : W=7.70

R1BC

For special length requirement
Please contact our sales personnel

Box header

pitch 2.00mm (0.079") | S.M.T. | Board spacer | Locating peg | Polarization

GPFC221 Series


Specifications

Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C

Materials

Contact Material :	Brass
Insulation Material :	High Temperature Thermoplastic, 94V-0 Nylon


All materials must meet Greenconn's requirements for environmental protection.

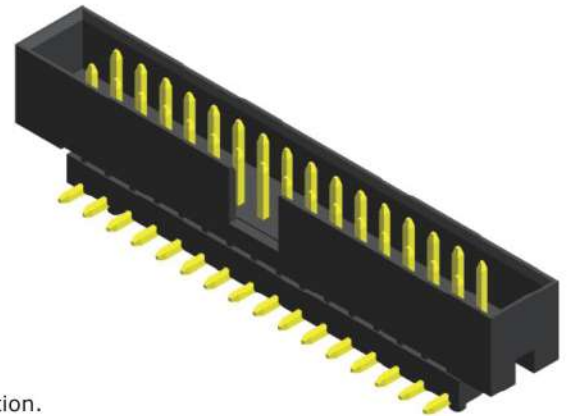






Mating with



D33 D34 D37 D38 D44



D45

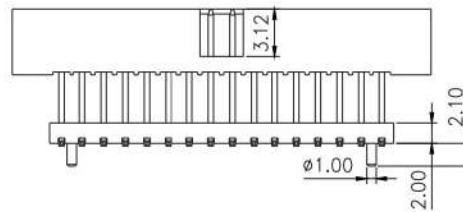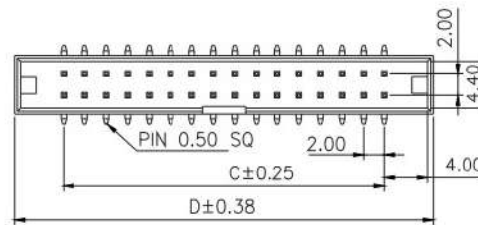

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	C	D		C	D		C	D
05	8.00	17.10	11	20.00	29.10	21	40.00	49.10
06	10.00	19.10	12	22.00	31.10	22	42.00	51.10
07	12.00	21.10	13	24.00	33.10	23	44.00	53.10
08	14.00	23.10	14	26.00	35.10	24	46.00	55.10
09	16.00	25.10	15	28.00	37.10	25	48.00	57.10
10	18.00	27.10	16	30.00	39.10			
			17	32.00	41.10			
			18	34.00	43.10			
			19	36.00	45.10			
			20	38.00	47.10			

Ordering Information

GPFC2	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	-	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	R1BC
	Height Option (H)		No. of Pins per Row	Standard Plating	Pin Length (A/W)	
	<input type="text" value="21"/>		<input type="text" value="05"/>	<input type="text" value="02"/> : Gold Flash	<input type="text" value="006"/> : A=13.7 / W=7.80	
			<input type="text" value="25"/>	Selective Plating		
				<input type="text" value="01"/> : Tin		
				<input type="text" value="05"/> : Gold Flash / Tin		

For special length requirement
Please contact our sales personnel

Ejector Box header

pitch 2.00mm (0.079") | S.M.T. | Polarization | with Lock

GPFC236 Series



Specifications

Current Rating :	2.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	500V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C

Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 Nylon

All materials must meet Greenconn's requirements for environmental protection.

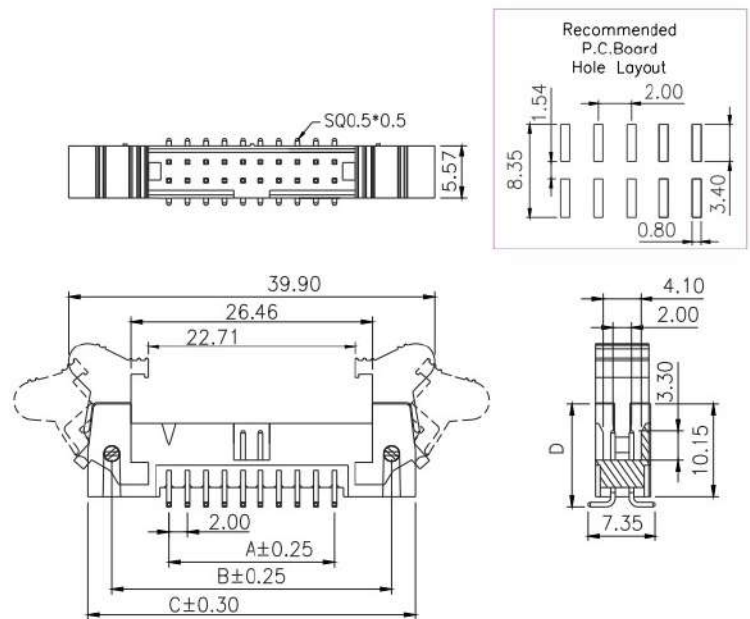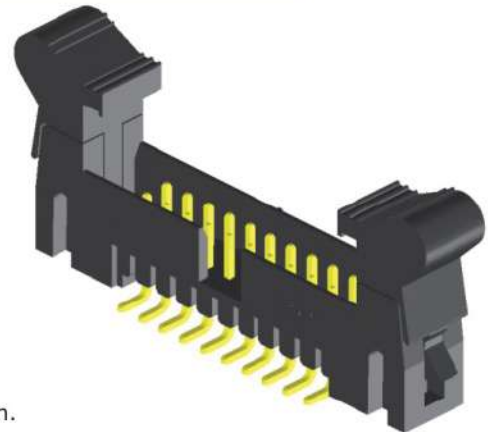

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	A	B	C		A	B	C
10	18.00	30.60	35.75	15	28.00	40.60	45.75
				16	30.00	42.60	47.75
				17	32.00	44.60	49.75
				18	34.00	46.60	51.75
				19	36.00	48.60	53.75
				20	38.00	50.60	55.75

Ordering Information

GPFC2

Height Option (H)

36

-

No. of Pins per Row

10 15 16 17 18
 19
 20

Standard Plating

02 : Gold Flash

Selective Plating

01 : Tin

05 : Gold Flash / Tin

Standard Packaging : Box

R1AA

A Pin Length (D)

001 : D=11.25

002 : D=10.20

For special length requirement
Please contact our sales personnel

I.D.C. socket

pitch 2.00mm (0.079") | Dip

CKFA216 Series


Specifications

Current Rating :	0.5 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	125V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C



Materials

Contact Material :	Brass
Insulation Material :	High Temperature Thermoplastic, 94V-0 PBT

All materials must meet Greenconn's requirements for environmental protection.

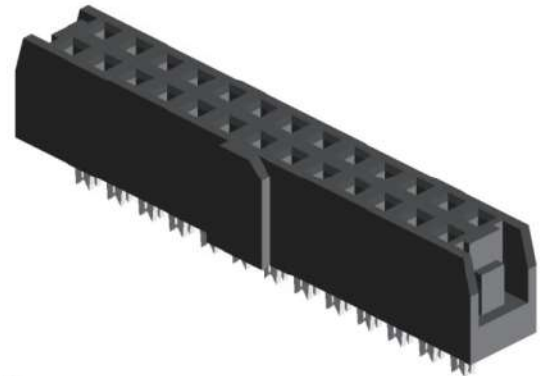

Mating with

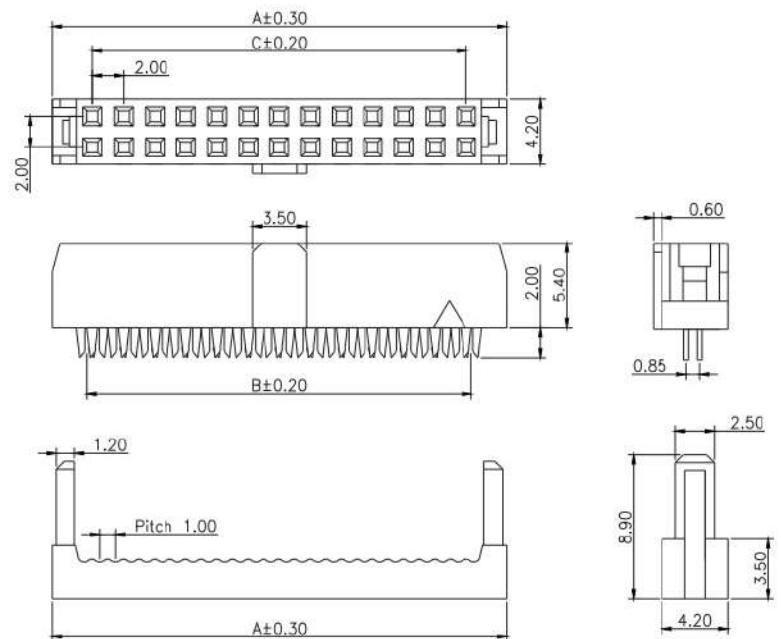

No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	A	B	C		A	B	C		A	B	C		A	B	C
03	11.20	5.00	4.00	11	27.20	21.00	20.00	22	49.20	43.00	42.00	31	67.20	61.00	60.00
04	13.20	7.00	6.00	12	29.20	23.00	22.00					32	69.20	63.00	62.00
05	15.20	9.00	8.00	13	31.20	25.00	24.00					34	73.20	67.00	66.00
06	17.20	11.00	10.00	15	35.20	29.00	28.00	25	55.20	49.00	48.00				
07	19.20	13.00	12.00	16	37.20	31.00	30.00								
08	21.20	15.00	14.00	17	39.20	33.00	32.00								
09	23.20	17.00	16.00	18	41.20	35.00	34.00								
10	25.20	19.00	18.00	19	43.20	37.00	36.00	30	65.20	59.00	58.00	40	85.20	79.00	78.00
				20	45.20	39.00	38.00								

Ordering Information

CKFA2

Height Option (H)

-

No. of Pins per Row

Standard Plating

: Gold Flash

Selective Plating

: Tin

: Gold Flash / Tin

Standard Packaging : Tube

A003A1BC

Greenconn provides




Floating Connectors



8Gbps High-speed Connector



RJ45 Series

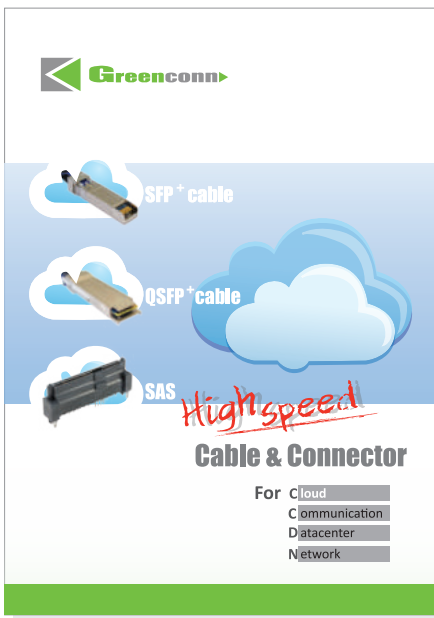

High Speed Series



Connector Brochure


Memo.



China


Greenconn Technology (Ganzhou) Ltd.

 The Dongshan Industrial District, Nankang District,
Ganzhou City, Jiangxi Province

 + 86 - 797 - 6635 510

 + 86 - 797 - 6635 653

 No.1 Niujiao Road, Yanchuan Community, Yanluo Street,
Baoan District, Shenzhen City, Guangdong Province

 + 86 - 755 - 2707 0050/1

 + 86 - 755 - 2707 0056

Kunshan Greenconn Technology Co., Ltd.

 No.18-2 Hong-Yang South Road, Bacheng Town,
Kunshan City, Jiangsu Province


 + 86 - 512 - 5782 5636

 + 86 - 512 - 5031 6595

Taiwan

Greenconn Corporation

 5F, No. 657-3, Zhongzheng Road, Xinzhuang District,
New Taipei City 242

 + 886 - 2 - 2209 1343

 + 886 - 2 - 2901 9811



www.greenconn.com
sales@greenconn.com

