


Board
to
Board



Wire
to
Board

PCI

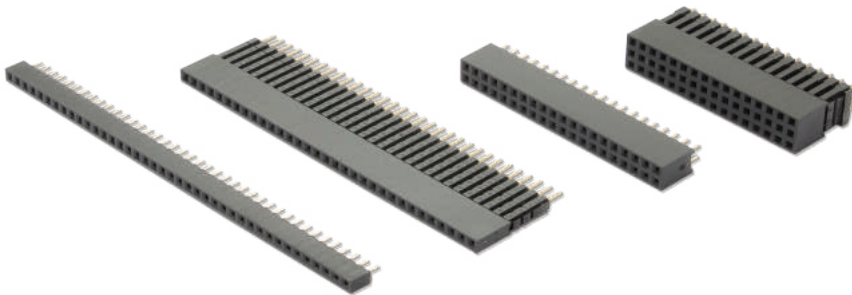

Greenconn ▶

Product selection guide
2019 - 20



I/O
connector


www.greenconn.com

solution for pitch 1.00mm

Board to Board




▶ Board to Board




GBCC204 Series

B01

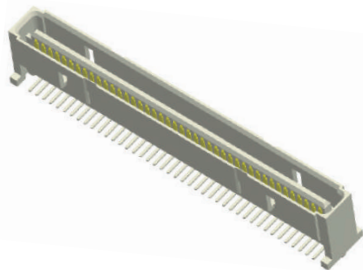


GBCC210 Series

B02




GBCC248 Series

B03

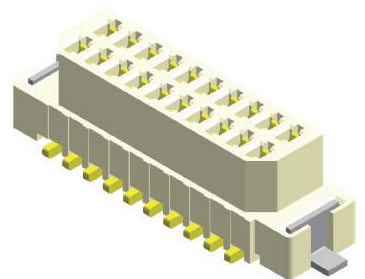

CBCC201 Series


B04

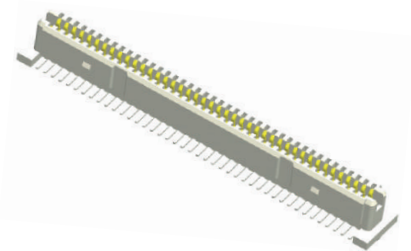

CBCC210 Series


B05

▶ Pin Header




GPCA102 Series

B06

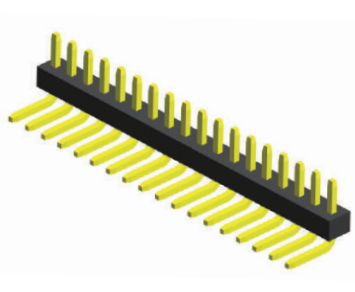


GPCB101 Series

B07

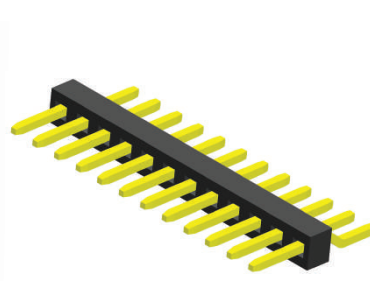

GPCD101 Series


B08

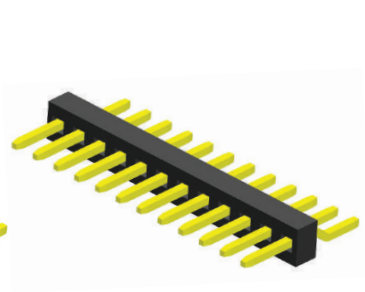

GPCD102 Series


B09

solution for pitch 1.00mm

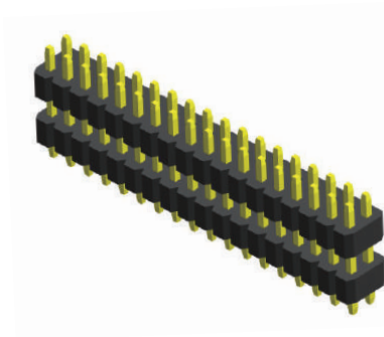


GPCA203 Series

B10




GPCA210 Series

B11




GPCB201 Series

B12

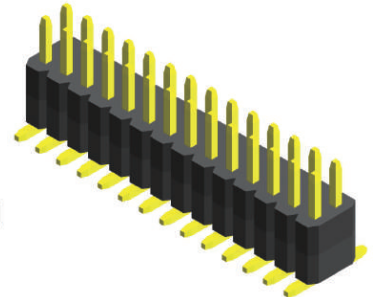


GPCC201 Series

B13




GPCC205 Series

B14



GPCC209
GPCC210
GPCC211 Series


B15

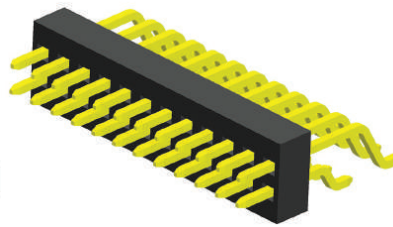

GPCD201 Series


B16

▶ Female Header




CSCA116 Series

B17

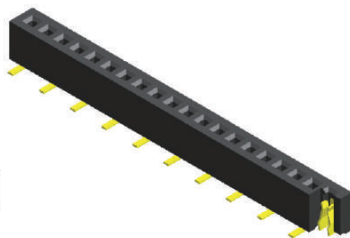


CSCC118 Series

B18

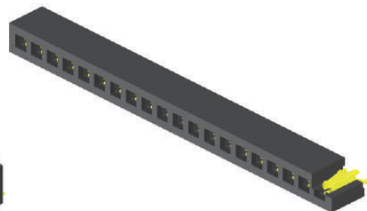

CSCD116 Series

B19

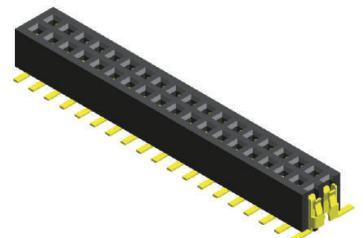


CSCC211 Series

B20

solution for pitch 1.00mm

Wire to Board

▶ Wafer

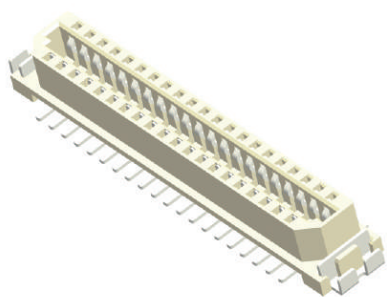

GWCC202 Series

I01

Board to Board

pitch 1.00x1.45mm (0.039"x0.057") | Male | S.M.T. R/A

GBCC204 Series


Specifications

Current Rating : 1.0 Ampere
 Insulation Resistance : 1000 MΩ Min
 Dielectric Withstanding : 300V AC
 Contact Resistance : 20 mΩ Max
 Operating Temperature : -40°C to +105°C

Materials

Contact Material : Phosphor Bronze
 Insulation Material : High Temperature Thermoplastic, 94V-0 Nylon






All materials must meet Greenconn's requirements for environmental protection.

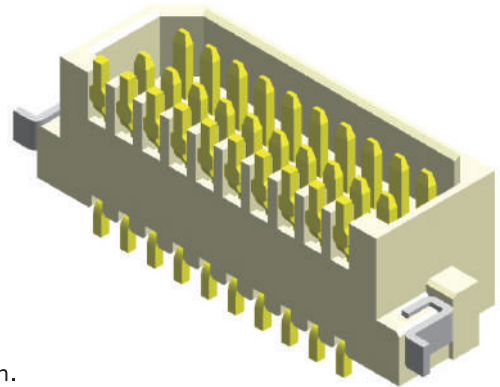

Mating with



B04

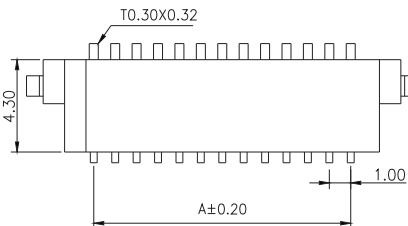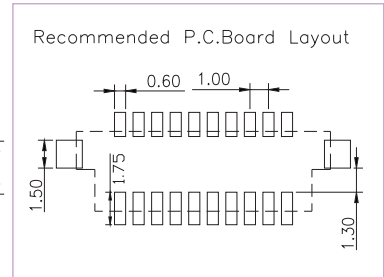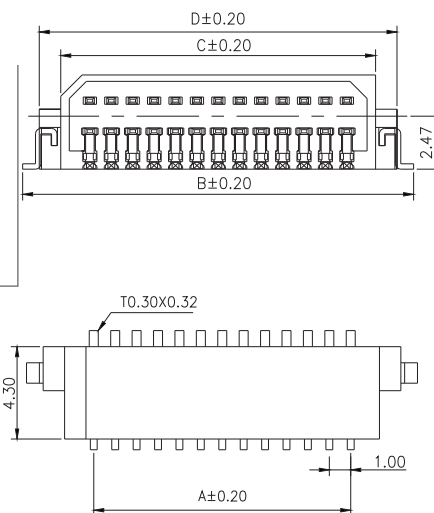

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information				No. of Pins/Row	Dimension Information			
	A	B	C	D		A	B	C	D
					11	10.00	16.25	12.70	14.70
					12	11.00	17.25	13.70	15.70
					13	12.00	18.25	14.70	16.70
					14	13.00	19.25	15.70	17.70
					15	14.00	20.25	16.70	18.70
05	4.00	10.25	6.70	8.70					
06	5.00	11.25	7.70	9.70					
07	6.00	12.25	8.70	10.70					
08	7.00	13.25	9.70	11.70					
09	8.00	14.25	10.70	12.70					
10	9.00	15.25	11.70	13.70					

Ordering Information

Standard Packaging : Tube

GBCC2 - A001REAC
 Height Option (H) Standard No. of Pins per Row Standard Plating
 : Gold Flash
 Selective Plating
 : Tin

Board to Board

pitch 1.00mm (0.039") | Male | S.M.T. | Locating peg

GBCC210 Series


Specifications

Current Rating :	0.5 Ampere
Insulation Resistance :	500 MΩ Min
Dielectric Withstanding :	200V AC
Contact Resistance :	30 mΩ Max
Operating Temperature :	-40°C to +105°C


Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 LCP






All materials must meet Greenconn's requirements for environmental protection.

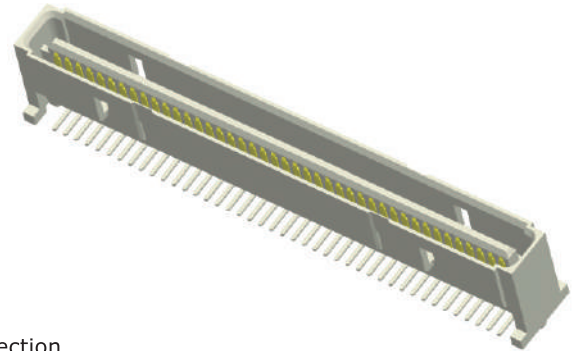

Mating with



B05

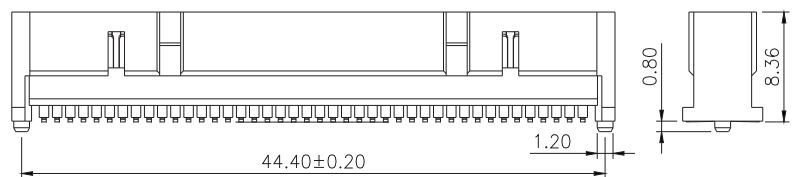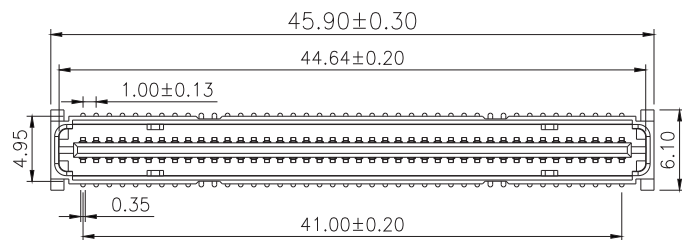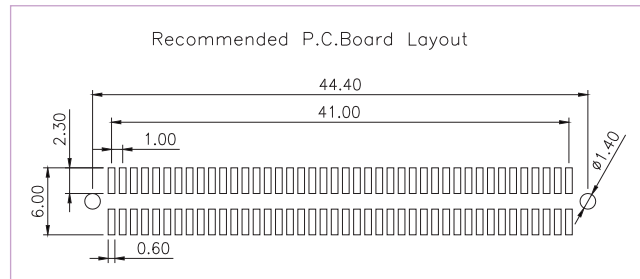

Ordering Information

Standard Packaging : Cap+Tape Reel

GBCC2	<input type="text" value="XX"/>	-	<input type="text" value="XX"/>	<input type="text" value="XX"/>	B001C2AF
	Height Option (H) Standard		No. of Pins per Row	Standard Plating	
	<input type="text" value="10"/>		<input type="text" value="42"/>	<input type="text" value="38"/> : Gold 10u" / Matte Tin 100u"	
				Selective Plating	
				<input type="text" value="01"/> : Tin	
				<input type="text" value="02"/> : Gold Flash	

Board to Board

pitch 1.00x1.45mm (0.039"x0.057") | Male | S.M.T.

GBCC248 Series


Specifications

Current Rating :	1.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	300V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C

Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 Nylon






All materials must meet Greenconn's requirements for environmental protection.

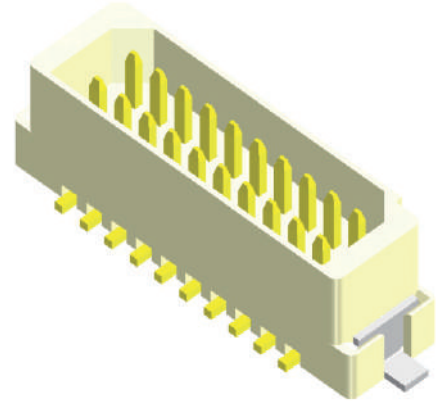

Mating with



B04

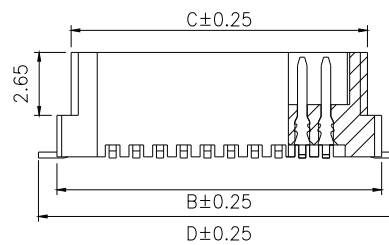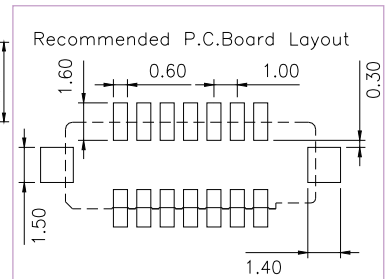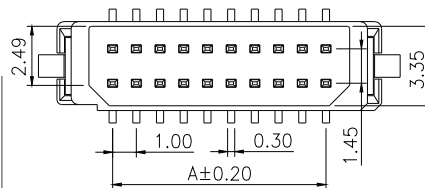

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information				No. of Pins/Row	Dimension Information			
	A	B	C	D		A	B	C	D
03	2.00	6.70	5.50	8.26	11	10.00	14.70	13.50	16.26
04	3.00	7.70	6.50	9.26	12	11.00	15.70	14.50	17.26
05	4.00	8.70	7.50	10.26	13	12.00	16.70	15.50	18.26
06	5.00	9.70	8.50	11.26	14	13.00	17.70	16.50	19.26
07	6.00	10.70	9.50	12.26	15	14.00	18.70	17.50	20.26
08	7.00	11.70	10.50	13.26					
09	8.00	12.70	11.50	14.26					
10	9.00	13.70	12.50	15.26					

Ordering Information

Standard Packaging : Tube

GBCC2

Height Option (H) Standard

-

No. of Pins per Row

?

Standard Plating

: Gold Flash

Selective Plating

: Tin

A001REAC


Board to Board

pitch 1.00x1.45mm (0.039"x0.057") | Female | S.M.T.

CBCC201 Series

Specifications

Current Rating :	1.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	300V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C

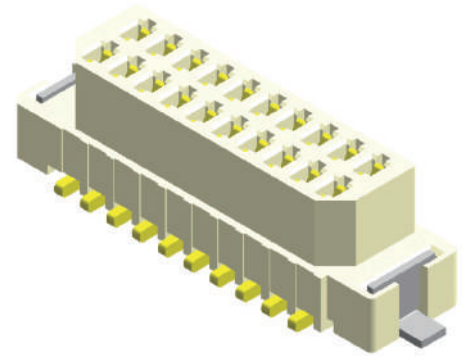


Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 Nylon



All materials must meet Greenconn's requirements for environmental protection.

Mating with






B01

B03

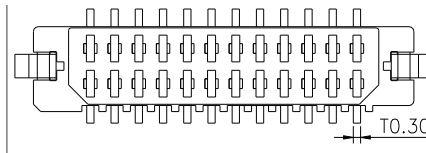

Recommended P.C.Board Layout

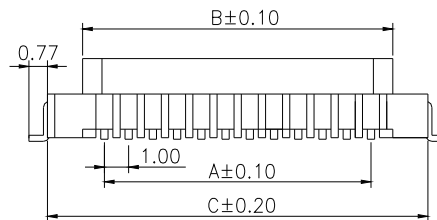

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information				No. of Pins/Row	Dimension Information			
	A	B	C	D		A	B	C	D
03	2.00	3.80	6.70	8.25	11	10.00	11.80	14.70	16.25
04	3.00	4.80	7.70	9.25	12	11.00	12.80	15.70	17.25
05	4.00	5.80	8.70	10.25	13	12.00	13.80	16.70	18.25
06	5.00	6.80	9.70	11.25	14	13.00	14.80	17.70	19.25
07	6.00	7.80	10.70	12.25	15	14.00	15.80	18.70	20.25
08	7.00	8.80	11.70	13.25					
09	8.00	9.80	12.70	14.25					
10	9.00	10.80	13.70	15.25					

Ordering Information

Standard Packaging : Tube

CBCC2	<input type="text" value="XX"/>	-	<input type="text" value="XX"/>	<input type="text" value="XX"/>	A001REAC
	Height Option (H) Standard		No. of Pins per Row	Standard Plating	
	<input type="text" value="01"/>		<input type="text" value="03"/>	<input type="text" value="02"/> : Gold Flash	
			<input type="text" value="15"/>	Selective Plating	
				<input type="text" value="01"/> : Tin	

Board to Board

pitch 1.00mm (0.039") | Female | S.M.T. | Locating peg

CBCC210 Series


Specifications

Current Rating :	0.5 Ampere
Insulation Resistance :	500 MΩ Min
Dielectric Withstanding :	200V AC
Contact Resistance :	30 mΩ Max
Operating Temperature :	-40°C to +105°C


Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 LCP







All materials must meet Greenconn's requirements for environmental protection.

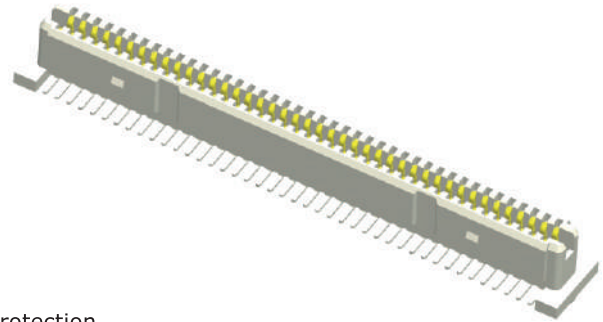

Mating with



B02

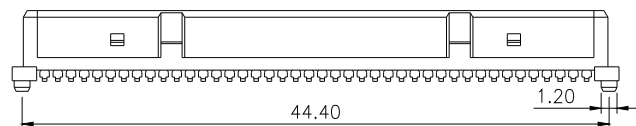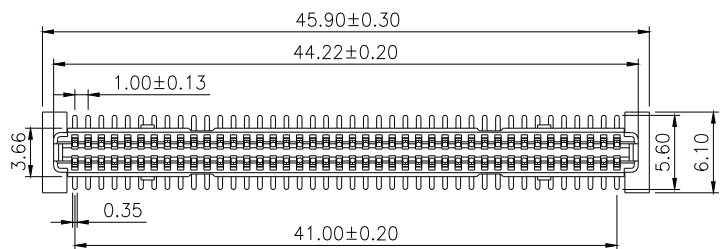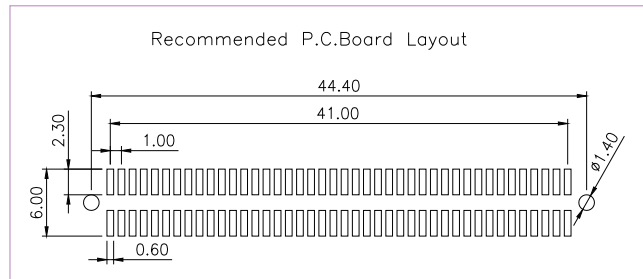

Ordering Information

Standard Packaging : Cap+Tape Reel

CBCC2	<input type="text" value="XX"/>	-	<input type="text" value="XX"/>	<input type="text" value="XX"/>	B001C2AF
	Height Option (H) Standard		No. of Pins per Row	Standard Plating	
	<input type="text" value="10"/>		<input type="text" value="42"/>	<input type="text" value="38"/> : Gold 10u" / Matte Tin 100u"	
				Selective Plating	
				<input type="text" value="01"/> : Tin	
				<input type="text" value="02"/> : Gold Flash	

Pin Header

pitch 1.00mm (0.039") | Single row | Dip | Board spacer

GPCA102 Series


Specifications

Current Rating :	1.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	300V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C






Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 LCP

All materials must meet Greenconn's requirements for environmental protection.

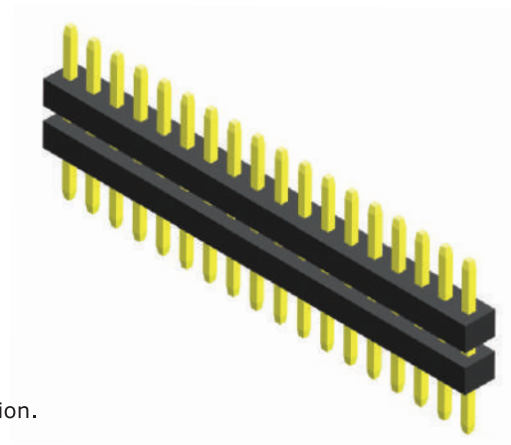

Mating with

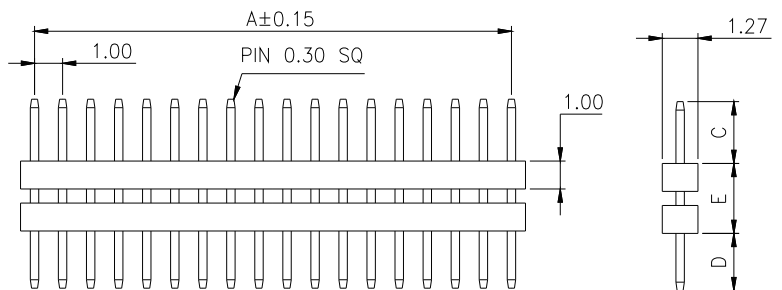

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	A	B			A	B			A	B			A	B	
				11	10.00	11.00		21	20.00	21.00		31	30.00	31.00	
				12	11.00	12.00		22	21.00	22.00		32	31.00	32.00	
				13	12.00	13.00		23	22.00	23.00		33	32.00	33.00	
04	3.00	4.00		14	13.00	14.00		24	23.00	24.00		34	33.00	34.00	
05	4.00	5.00		15	14.00	15.00		25	24.00	25.00		35	34.00	35.00	
06	5.00	6.00		16	15.00	16.00		26	25.00	26.00		36	35.00	36.00	
07	6.00	7.00		17	16.00	17.00		27	26.00	27.00		37	36.00	37.00	
08	7.00	8.00		18	17.00	18.00		28	27.00	28.00		38	37.00	38.00	
09	8.00	9.00		19	18.00	19.00		29	28.00	29.00		39	38.00	39.00	
10	9.00	10.00		20	19.00	20.00		30	29.00	30.00		40	39.00	40.00	

Ordering Information

Standard Packaging : Box

GPCA1	<input type="checkbox"/> <input type="checkbox"/>	-	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	C1AA
	Layer Option		No. of Pins per Row	Standard Plating	Pin Length (C/D/E)	
	<input type="checkbox"/> 02 : Double layer		<input type="checkbox"/> 04 ? <input type="checkbox"/> 40	<input type="checkbox"/> 02 : Gold Flash <input type="checkbox"/> 01 : Tin	<input type="checkbox"/> 004 : C=1.90 / D=1.90 / E=2.55	
						For special length requirement Please contact our sales personnel

Pin Header

pitch 1.00mm (0.039") | Single row | R/A

GPCB101 Series


Specifications

Current Rating :	1.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	300V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C


Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 LCP





All materials must meet Greenconn's requirements for environmental protection.

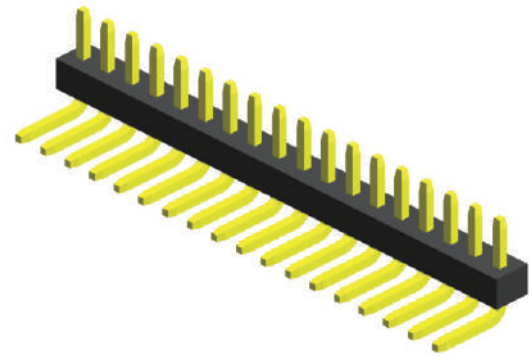

Mating with

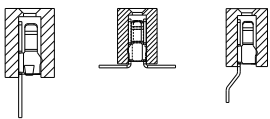

B17 B18 B19

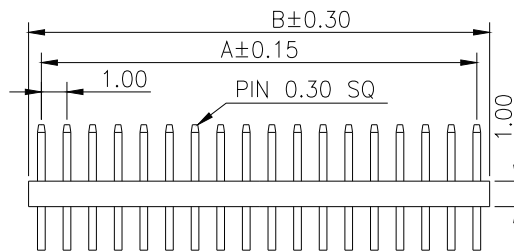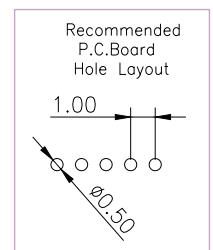

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	A	B			A	B			A	B			A	B	
02	1.00	2.00		11	10.00	11.00		21	20.00	21.00		31	30.00	31.00	
03	2.00	3.00		12	11.00	12.00		22	21.00	22.00		32	31.00	32.00	
04	3.00	4.00		13	12.00	13.00		23	22.00	23.00		33	32.00	33.00	
05	4.00	5.00		14	13.00	14.00		24	23.00	24.00		34	33.00	34.00	
06	5.00	6.00		15	14.00	15.00		25	24.00	25.00		35	34.00	35.00	
07	6.00	7.00		16	15.00	16.00		26	25.00	26.00		36	35.00	36.00	
08	7.00	8.00		17	16.00	17.00		27	26.00	27.00		37	36.00	37.00	
09	8.00	9.00		18	17.00	18.00		28	27.00	28.00		38	37.00	38.00	
10	9.00	10.00		19	18.00	19.00		29	28.00	29.00		39	38.00	39.00	
				20	19.00	20.00		30	29.00	30.00		40	39.00	40.00	

Ordering Information

Standard Packaging : Tube

GPCB1	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	-	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	<input checked="" type="checkbox"/> <input checked="" type="checkbox"/> <input checked="" type="checkbox"/>	C1AC
	Height Option (H)		No. of Pins per Row	Standard Plating	Pin Length (C/D/E)	
	<input type="checkbox"/> 01		<input checked="" type="checkbox"/> 02	<input type="checkbox"/> 02 : Gold Flash	<input type="checkbox"/> 003 : C=3.00 / D=2.50 / E=2.50	
			<input type="checkbox"/> 40	Selective Plating	<input type="checkbox"/> 004 : C=1.80 / D=2.50 / E=2.50	
				<input type="checkbox"/> 01 : Tin	For special length requirement Please contact our sales personnel	

Pin Header

pitch 1.00mm (0.039") | Single row | S.M.T.

GPCD101 Series


Specifications

Current Rating :	1.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	300V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C



Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 LCP



All materials must meet Greenconn's requirements for environmental protection.

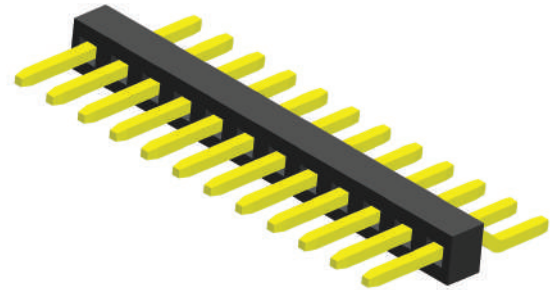

Mating with

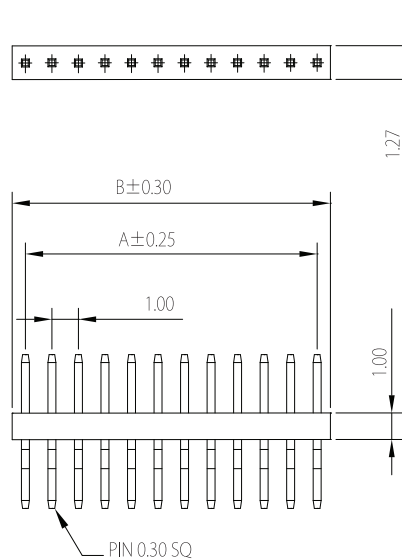

Recommended P.C.Board Layout



* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	A	B			A	B			A	B			A	B	
02	1.00	2.00		11	10.00	11.00		21	20.00	21.00		31	30.00	31.00	
03	2.00	3.00		12	11.00	12.00		22	21.00	22.00		32	31.00	32.00	
04	3.00	4.00		13	12.00	13.00		23	22.00	23.00		33	32.00	33.00	
05	4.00	5.00		14	13.00	14.00		24	23.00	24.00		34	33.00	34.00	
06	5.00	6.00		15	14.00	15.00		25	24.00	25.00		35	34.00	35.00	
07	6.00	7.00		16	15.00	16.00		26	25.00	26.00		36	35.00	36.00	
08	7.00	8.00		17	16.00	17.00		27	26.00	27.00		37	36.00	37.00	
09	8.00	9.00		18	17.00	18.00		28	27.00	28.00		38	37.00	38.00	
10	9.00	10.00		19	18.00	19.00		29	28.00	29.00		39	38.00	39.00	
				20	19.00	20.00		30	29.00	30.00		40	39.00	40.00	

Ordering Information

Standard Packaging : Tube

GPCD1	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>	-	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>	C1AC
	Layer Option		No. of Pins per Row	Standard Plating	Pin Length (C/D/E)			
	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>		<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> : Gold Flash	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/> : C=2.20 / D=2.60 / E=1.50			
	<input type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/>		<input type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/>	Selective Plating	<input type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/> : C=4.00 / D=2.60 / E=1.50			
				<input type="checkbox"/> <input type="checkbox"/> <input checked="" type="checkbox"/> : Tin	For special length requirement Please contact our sales personnel			

Pin Header

pitch 1.00mm (0.039") | Single row | S.M.T

GPCD102 Series


Specifications

Current Rating :	1.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	300V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C



Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 LCP



All materials must meet Greenconn's requirements for environmental protection.

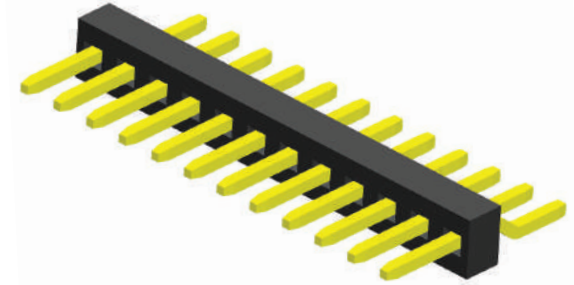

Mating with

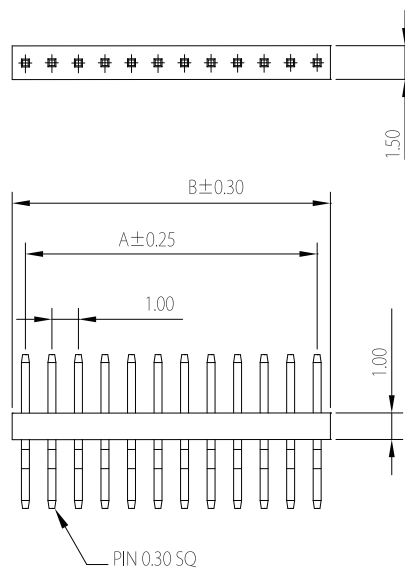

Recommended P.C.Board Layout

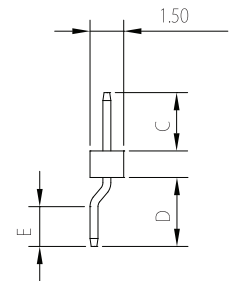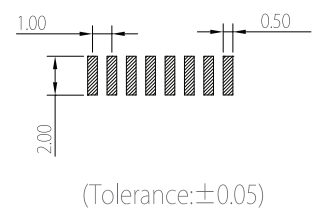

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	A	B			A	B			A	B			A	B	
02	1.00	2.00		11	10.00	11.00		21	20.00	21.00		31	30.00	31.00	
03	2.00	3.00		12	11.00	12.00		22	21.00	22.00		32	31.00	32.00	
04	3.00	4.00		13	12.00	13.00		23	22.00	23.00		33	32.00	33.00	
05	4.00	5.00		14	13.00	14.00		24	23.00	24.00		34	33.00	34.00	
06	5.00	6.00		15	14.00	15.00		25	24.00	25.00		35	34.00	35.00	
07	6.00	7.00		16	15.00	16.00		26	25.00	26.00		36	35.00	36.00	
08	7.00	8.00		17	16.00	17.00		27	26.00	27.00		37	36.00	37.00	
09	8.00	9.00		18	17.00	18.00		28	27.00	28.00		38	37.00	38.00	
10	9.00	10.00		19	18.00	19.00		29	28.00	29.00		39	38.00	39.00	
				20	19.00	20.00		30	29.00	30.00		40	39.00	40.00	

Ordering Information

Standard Packaging : Tube

GPCD1	<input type="checkbox"/> <input type="checkbox"/>	-	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	C1AC
	Height Option (H) Standard		No. of Pins per Row	Standard Plating	Pin Length (C/D/E)	
	<input type="checkbox"/> 02		<input type="checkbox"/> 02	<input type="checkbox"/> 02 : Gold Flash	<input type="checkbox"/> 001 : C=2.20 / D=2.60 / E=1.50	
			<input type="checkbox"/> 40	Selective Plating	<input type="checkbox"/> 007 : C=3.00 / D=2.60 / E=1.50	
				<input type="checkbox"/> 01 : Tin	For special length requirement Please contact our sales personnel	

Pin Header

pitch 1.00mm (0.039") | Dual row | Dip | Board spacer

GPCA203 Series


Specifications

Current Rating :	1.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	300V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C

Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 LCP





All materials must meet Greenconn's requirements for environmental protection.

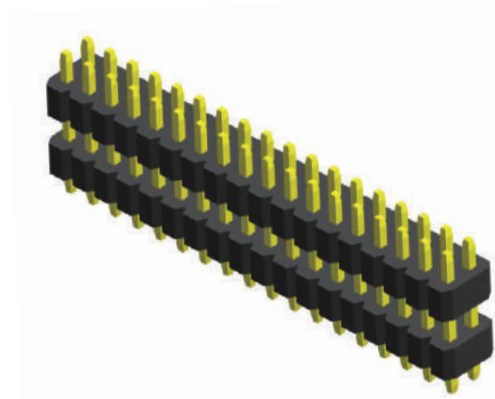

Mating with



B20

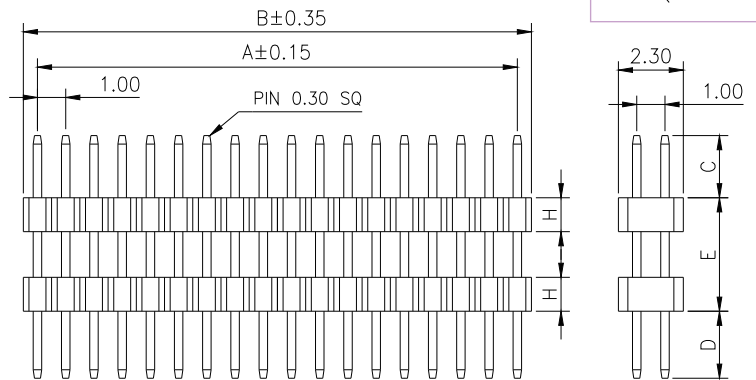

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	A	B			A	B			A	B			A	B	
02	1.00	2.00		11	10.00	11.00		21	20.00	21.00		31	30.00	31.00	
03	2.00	3.00		12	11.00	12.00		22	21.00	22.00		32	31.00	32.00	
04	3.00	4.00		13	12.00	13.00		23	22.00	23.00		33	32.00	33.00	
05	4.00	5.00		14	13.00	14.00		24	23.00	24.00		34	33.00	34.00	
06	5.00	6.00		15	14.00	15.00		25	24.00	25.00		35	34.00	35.00	
07	6.00	7.00		16	15.00	16.00		26	25.00	26.00		36	35.00	36.00	
08	7.00	8.00		17	16.00	17.00		27	26.00	27.00		37	36.00	37.00	
09	8.00	9.00		18	17.00	18.00		28	27.00	28.00		38	37.00	38.00	
10	9.00	10.00		19	18.00	19.00		29	28.00	29.00		39	38.00	39.00	
				20	19.00	20.00		30	29.00	30.00		40	39.00	40.00	

Ordering Information

Standard Packaging : Box

GPCA2	<input type="checkbox"/> <input type="checkbox"/>	-	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	C1AA
	Layer Option (H)		No. of Pins per Row	Standard Plating	Pin Length (C/D/E)	
	<input type="checkbox"/> 03 : H=1.00 (Double layer)		<input type="checkbox"/> 02 }	<input type="checkbox"/> 02 : Gold Flash	<input type="checkbox"/> 003 : C=1.90 / D=1.90 / E=2.55	
			<input type="checkbox"/> 40	Selective Plating		
				<input type="checkbox"/> 01 : Tin		
						For special length requirement Please contact our sales personnel

Pin Header

pitch 1.00mm (0.039") | Dual row | Dip

GPCA210 Series


Specifications

Current Rating :	1.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	300V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C

Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 LCP





All materials must meet Greenconn's requirements for environmental protection.

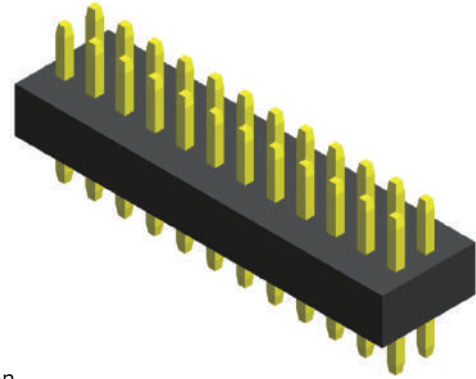

Mating with



B20

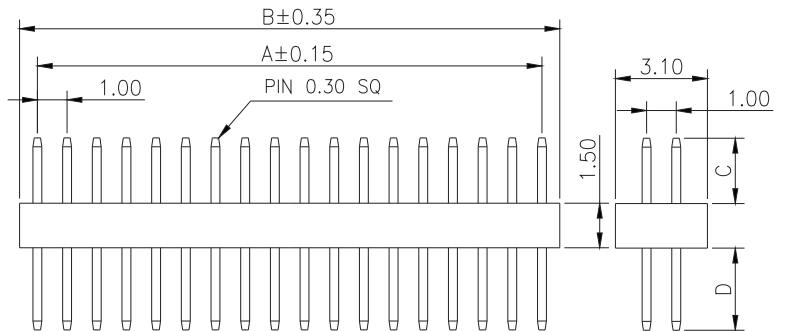

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	A	B			A	B			A	B			A	B	
02	1.00	2.20		11	10.00	11.20		21	20.00	21.20		31	30.00	31.20	
03	2.00	3.20		12	11.00	12.20		22	21.00	22.20		32	31.00	32.20	
04	3.00	4.20		13	12.00	13.20		23	22.00	23.20		33	32.00	33.20	
05	4.00	5.20		14	13.00	14.20		24	23.00	24.20		34	33.00	34.20	
06	5.00	6.20		15	14.00	15.20		25	24.00	25.20		35	34.00	35.20	
07	6.00	7.20		16	15.00	16.20		26	25.00	26.20		36	35.00	36.20	
08	7.00	8.20		17	16.00	17.20		27	26.00	27.20		37	36.00	37.20	
09	8.00	9.20		18	17.00	18.20		28	27.00	28.20		38	37.00	38.20	
10	9.00	10.20		19	18.00	19.20		29	28.00	29.20		39	38.00	39.20	
				20	19.00	20.20		30	29.00	30.20		40	39.00	40.20	

Ordering Information

Standard Packaging : Box

GPCA2	[XX]	-	[XX]	[XX]	[X]	[XXX]	C1AA
	Height Option (H) Standard		No. of Pins per Row	Standard Plating	[A]	Pin Length (C/D)	
	[10]		[02]	[02] : Gold Flash		[010] : C=4.00 / D=2.00	
			[40]	Selective Plating		[700] : C=1.90 / D=3.00	
				[01] : Tin		For special length requirement Please contact our sales personnel	

Pin Header

pitch 1.00mm (0.039") | Dual row | R/A

GPCB201 Series


Specifications

Current Rating :	1.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	300V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C

Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 LCP






All materials must meet Greenconn's requirements for environmental protection.

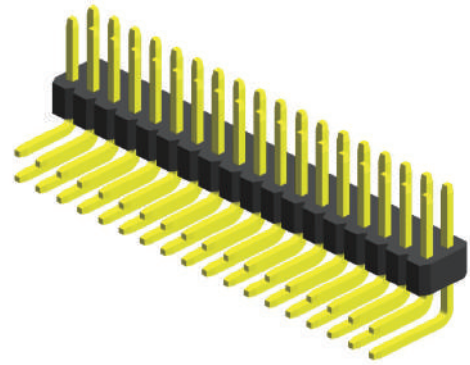

Mating with



B20

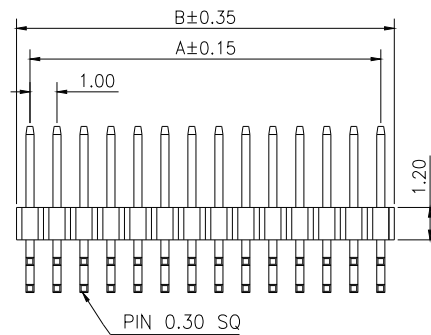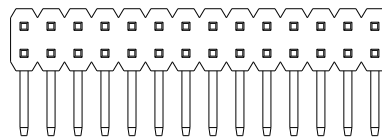

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	A	B			A	B			A	B			A	B	
02	1.00	2.00		11	10.00	11.00		21	20.00	21.00		31	30.00	31.00	
03	2.00	3.00		12	11.00	12.00		22	21.00	22.00		32	31.00	32.00	
04	3.00	4.00		13	12.00	13.00		23	22.00	23.00		33	32.00	33.00	
05	4.00	5.00		14	13.00	14.00		24	23.00	24.00		34	33.00	34.00	
06	5.00	6.00		15	14.00	15.00		25	24.00	25.00		35	34.00	35.00	
07	6.00	7.00		16	15.00	16.00		26	25.00	26.00		36	35.00	36.00	
08	7.00	8.00		17	16.00	17.00		27	26.00	27.00		37	36.00	37.00	
09	8.00	9.00		18	17.00	18.00		28	27.00	28.00		38	37.00	38.00	
10	9.00	10.00		19	18.00	19.00		29	28.00	29.00		39	38.00	39.00	
				20	19.00	20.00		30	29.00	30.00		40	39.00	40.00	

Ordering Information

Standard Packaging : Box

GPCB2	<input type="checkbox"/> <input type="checkbox"/>	-	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	C1AC
	Height Option (H) Standard		No. of Pins per Row	Standard Plating	A	Pin Length (C/D/E)	
	<input type="checkbox"/> 01		<input type="checkbox"/> 02	<input type="checkbox"/> 02 : Gold Flash	<input type="checkbox"/> 010	: C=2.00 / D=2.10 / E=1.90	
			<input type="checkbox"/> 40	Selective Plating			
				<input type="checkbox"/> 01 : Tin			
							For special length requirement Please contact our sales personnel

Pin Header

pitch 1.00mm (0.039") | Dual row | S.M.T.

GPCC201 Series


Specifications

Current Rating :	1.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	300V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C

Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 Nylon





All materials must meet Greenconn's requirements for environmental protection.

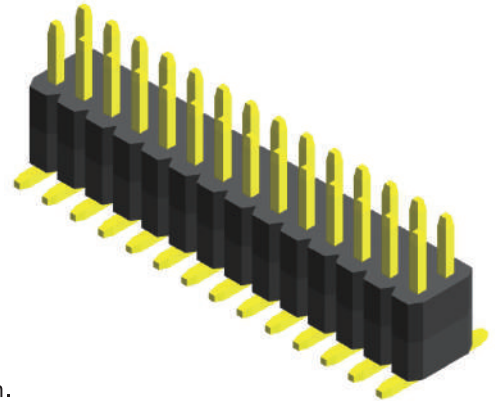

Mating with



B20

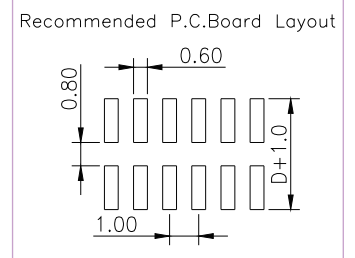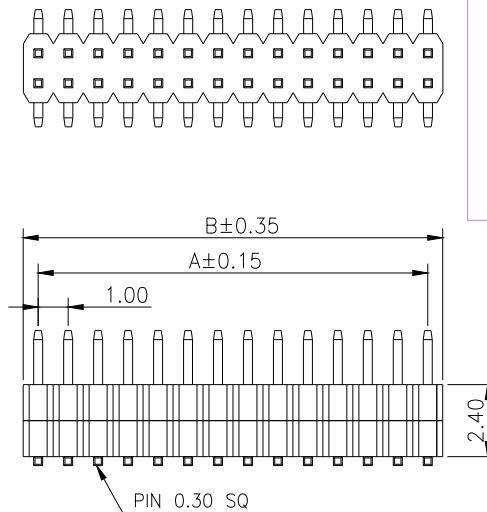

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	A	B			A	B			A	B			A	B	
02	1.00	2.00		11	10.00	11.00		21	20.00	21.00		31	30.00	31.00	
03	2.00	3.00		12	11.00	12.00		22	21.00	22.00		32	31.00	32.00	
04	3.00	4.00		13	12.00	13.00		23	22.00	23.00		33	32.00	33.00	
05	4.00	5.00		14	13.00	14.00		24	23.00	24.00		34	33.00	34.00	
06	5.00	6.00		15	14.00	15.00		25	24.00	25.00		35	34.00	35.00	
07	6.00	7.00		16	15.00	16.00		26	25.00	26.00		36	35.00	36.00	
08	7.00	8.00		17	16.00	17.00		27	26.00	27.00		37	36.00	37.00	
09	8.00	9.00		18	17.00	18.00		28	27.00	28.00		38	37.00	38.00	
10	9.00	10.00		19	18.00	19.00		29	28.00	29.00		39	38.00	39.00	
				20	19.00	20.00		30	29.00	30.00		40	39.00	40.00	

Ordering Information

Standard Packaging : Box

GPCC2	<input type="checkbox"/> X <input type="checkbox"/> X	-	<input type="checkbox"/> X <input type="checkbox"/> X	<input type="checkbox"/> X <input type="checkbox"/> X	<input type="checkbox"/> X <input type="checkbox"/> X <input type="checkbox"/> X	R1AC
	Height Option (H) Standard		No. of Pins per Row	Standard Plating	Pin Length (C/D/E)	
	<input type="checkbox"/> 01		<input type="checkbox"/> 02	<input type="checkbox"/> 02 : Gold Flash	<input type="checkbox"/> 004 : C=1.90 / D=3.80 / E=3.70	
			<input type="checkbox"/> 40	Selective Plating	<input type="checkbox"/> 005 : C=2.50 / D=3.80 / E=5.00	
				<input type="checkbox"/> 01 : Tin	For special length requirement Please contact our sales personnel	

Pin Header

pitch 1.00mm (0.039") | Dual row | S.M.T. | Board spacer | Locating peg

GPCC205 Series


Specifications

Current Rating :	1.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	300V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C

Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 LCP



All materials must meet Greenconn's requirements for environmental protection.

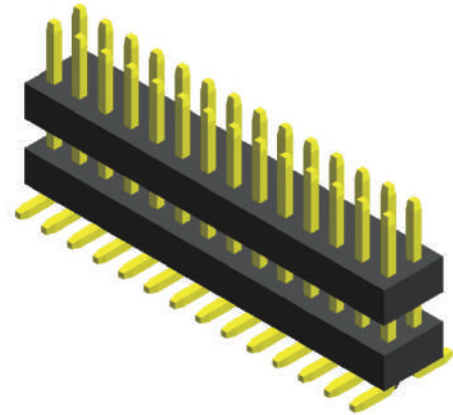



Mating with



B20

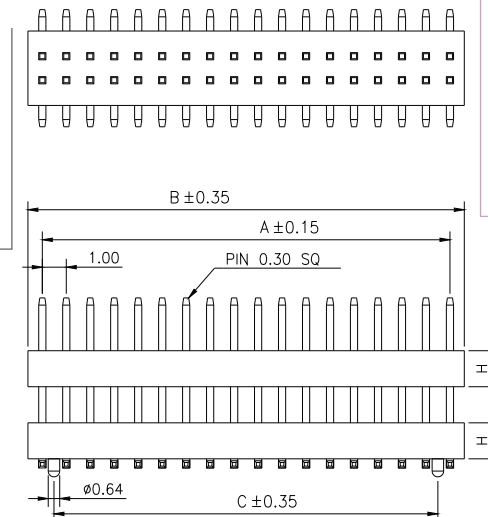

Recommended P.C.Board Layout



* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	A	B	C		A	B	C		A	B	C		A	B	C
03	2.00	3.20	1.00	11	10.00	11.20	9.00	21	20.00	21.20	19.00	31	30.00	31.20	29.00
04	3.00	4.20	2.00	12	11.00	12.20	10.00	22	21.00	22.20	20.00	32	31.00	32.20	30.00
05	4.00	5.20	3.00	13	12.00	13.20	11.00	23	22.00	23.20	21.00	33	32.00	33.20	31.00
06	5.00	6.20	4.00	14	13.00	14.20	12.00	24	23.00	24.20	22.00	34	33.00	34.20	32.00
07	6.00	7.20	5.00	15	14.00	15.20	13.00	25	24.00	25.20	23.00	35	34.00	35.20	33.00
08	7.00	8.20	6.00	16	15.00	16.20	14.00	26	25.00	26.20	24.00	36	35.00	36.20	34.00
09	8.00	9.20	7.00	17	16.00	17.20	15.00	27	26.00	27.20	25.00	37	36.00	37.20	35.00
10	9.00	10.20	8.00	18	17.00	18.20	16.00	28	27.00	28.20	26.00	38	37.00	38.20	36.00
				19	18.00	19.20	17.00	29	28.00	29.20	27.00	39	38.00	39.20	37.00
				20	19.00	20.20	18.00	30	29.00	30.20	28.00	40	39.00	40.20	38.00

Ordering Information

GPCC2 [XX]

Layer Option (H)

[05] : H=1.00

- [XX]

No. of Pins per Row

[03]

~

[40]

[XX]

Standard Plating

[02] : Gold Flash

Selective Plating

[01] : Tin

Standard Packaging : Tube

[X]

[XXX]

C1AC

[B] Pin Length (C/D/E/F)

[004] : C=1.90/D=1.30/E=5.20/F=2.30

For special length requirement
Please contact our sales personnel

Pin Header

pitch 1.00mm (0.039") | Dual row | S.M.T. | W/O Locating peg

GPCC209
GPCC210
GPCC211 Series


Specifications

Current Rating :	1.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	300V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C

Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 LCP



All materials must meet Greenconn's requirements for environmental protection.

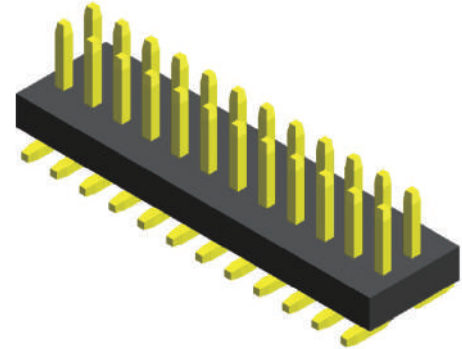



Mating with



B20

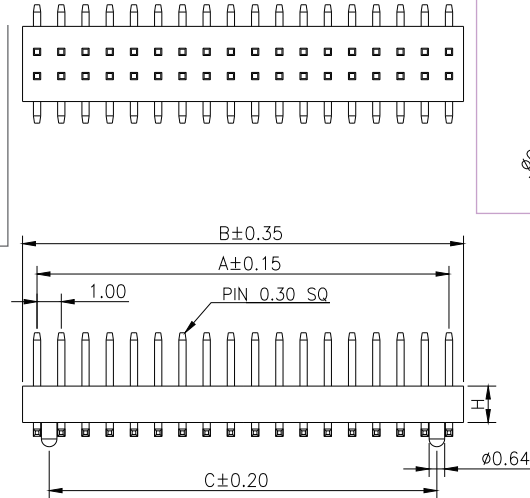

Recommended P.C.Board Layout



* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	A	B	C		A	B	C		A	B	C		A	B	C
02	1.00	2.00		11	10.00	11.00	9.00	21	20.00	21.00	19.00	31	30.00	31.00	29.00
03	2.00	3.00		12	11.00	12.00	10.00	22	21.00	22.00	20.00	32	31.00	32.00	30.00
04	3.00	4.00		13	12.00	13.00	11.00	23	22.00	23.00	21.00	33	32.00	33.00	31.00
05	4.00	5.00	3.00	14	13.00	14.00	12.00	24	23.00	24.00	22.00	34	33.00	34.00	32.00
06	5.00	6.00	4.00	15	14.00	15.00	13.00	25	24.00	25.00	23.00	35	34.00	35.00	33.00
07	6.00	7.00	5.00	16	15.00	16.00	14.00	26	25.00	26.00	24.00	36	35.00	36.00	34.00
08	7.00	8.00	6.00	17	16.00	17.00	15.00	27	26.00	27.00	25.00	37	36.00	37.00	35.00
09	8.00	9.00	7.00	18	17.00	18.00	16.00	28	27.00	28.00	26.00	38	37.00	38.00	36.00
10	9.00	10.00	8.00	19	18.00	19.00	17.00	29	28.00	29.00	27.00	39	38.00	39.00	37.00
				20	19.00	20.00	18.00	30	29.00	30.00	28.00	40	39.00	40.00	38.00

Ordering Information

Standard Packaging : Tube

GPCC2	<input type="text" value="XX"/>	-	<input type="text" value="XX"/>	<input type="text" value="XX"/>	<input type="text" value="X"/>	<input type="text" value="XXX"/>	C1AC
	Height Option (H) Standard		No. of Pins per Row	Standard Plating	A:W/O Peg B:Peg	Pin Length (C/D/E)	
	<input type="text" value="09"/> : H=1.00		<input type="text" value="02"/>	<input type="text" value="02"/> : Gold Flash	GPCC209...A	<input type="text" value="007"/> : C=2.20 / D=1.50 / E=6.00	
	<input type="text" value="10"/> : H=1.50		<input type="text" value="40"/>	Selective Plating	GPCC210...A	<input type="text" value="007"/> : C=1.90 / D=1.80 / E=5.20	
	<input type="text" value="11"/> : H=1.20			<input type="text" value="01"/> : Tin	GPCC211...A	<input type="text" value="001"/> : C=2.00 / D=1.60 / E=4.80	
					GPCC209...B	<input type="text" value="001"/> : C=1.90 / D=1.30 / E=4.60	
					GPCC210...B	<input type="text" value="001"/> : C=1.90 / D=1.90 / E=6.20	
					GPCC211...B	<input type="text" value="001"/> : C=2.00 / D=1.60 / E=4.80	

For special length requirement
Please contact our sales personnel

Pin Header

pitch 1.00mm (0.039") | Dual row | S.M.T.

GPCD201 Series


Specifications

Current Rating :	1.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	300V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C

Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 LCP




All materials must meet Greenconn's requirements for environmental protection.

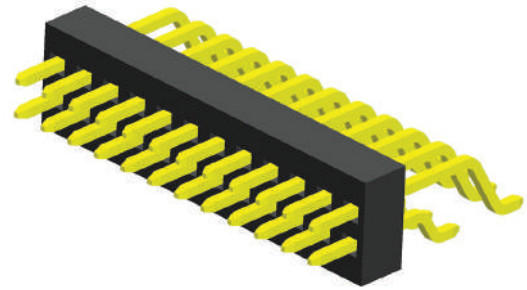



Mating with



B20

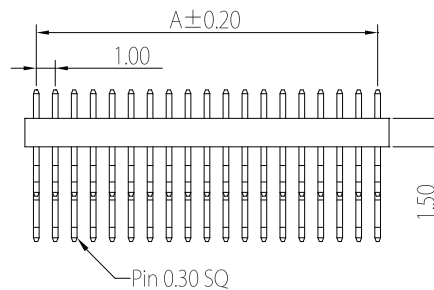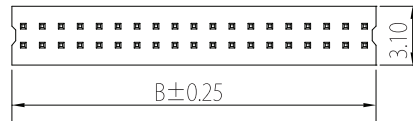

Recommended P.C.Board Layout



* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	A	B		A	B
02	1.00	2.20	11	10.00	11.20
03	2.00	3.20	12	11.00	12.20
04	3.00	4.20	13	12.00	13.20
05	4.00	5.20	14	13.00	14.20
06	5.00	6.20	15	14.00	15.20
07	6.00	7.20			
08	7.00	8.20			
09	8.00	9.20			
10	9.00	10.20			

Ordering Information

GPCD2

Layer Option (H)

: H=1.50

-

No. of Pins per Row

?

Standard Plating

: Gold Flash

Selective Plating

: Tin

Standard Packaging : Tube

C1AC

Pin Length (C/D/E)

: C=1.50 / D=2.60 / E=5.00

: C=2.50 / D=2.60 / E=5.00

For special length requirement

Please contact our sales personnel

Female Header

pitch 1.00mm (0.039") | Single row | S.M.T.

CSCC118 Series


Specifications

Current Rating :	1.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	300V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C




Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 LCP


All materials must meet Greenconn's requirements for environmental protection.

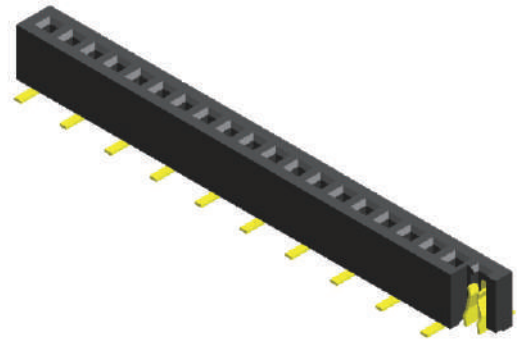

Mating with

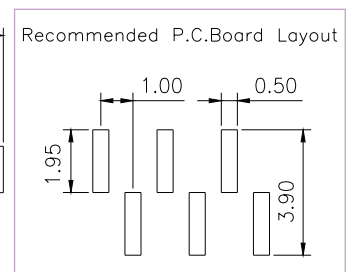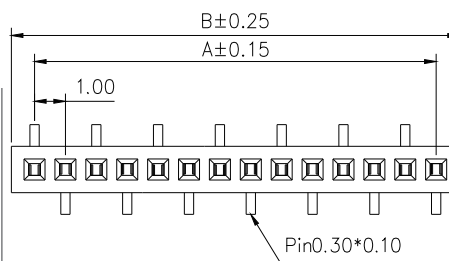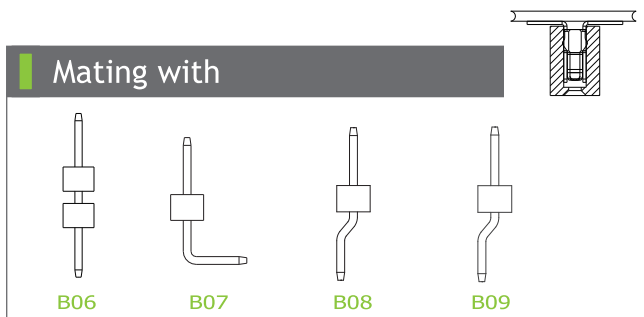

P.S. : Suggested mating pin length : 1.5 ~1.9 mm

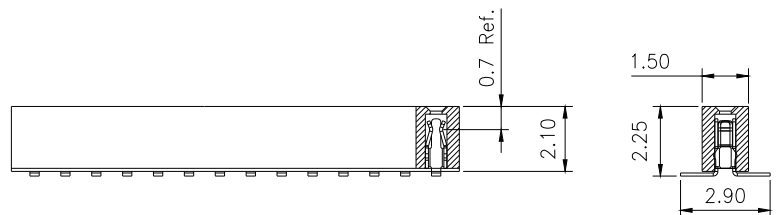

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	A	B			A	B			A	B			A	B	
02	1.00	2.50		11	10.00	11.50		21	20.00	21.50		31	30.00	31.50	
03	2.00	3.50		12	11.00	12.50		22	21.00	22.50		32	31.00	32.50	
04	3.00	4.50		13	12.00	13.50		23	22.00	23.50		33	32.00	33.50	
05	4.00	5.50		14	13.00	14.50		24	23.00	24.50		34	33.00	34.50	
06	5.00	6.50		15	14.00	15.50		25	24.00	25.50		35	34.00	35.50	
07	6.00	7.50		16	15.00	16.50		26	25.00	26.50		36	35.00	36.50	
08	7.00	8.50		17	16.00	17.50		27	26.00	27.50		37	36.00	37.50	
09	8.00	9.50		18	17.00	18.50		28	27.00	28.50		38	37.00	38.50	
10	9.00	10.50		19	18.00	19.50		29	28.00	29.50		39	38.00	39.50	
				20	19.00	20.50		30	29.00	30.50		40	39.00	40.50	

Ordering Information

Standard Packaging : Tube

CSCC1	<input type="text" value="XX"/>	-	<input type="text" value="XX"/>	<input type="text" value="XX"/>	A001C1AC
	Height Option (H) Standard		No. of Pins per Row	Standard Plating	
	<input type="text" value="18"/>		<input type="text" value="02"/>	<input type="text" value="02"/> : Gold Flash	
			<input type="text" value="40"/>	Selective Plating	
				<input type="text" value="01"/> : Tin	

Female Header

pitch 1.00mm (0.039") | Single row | S.M.T.

CSCD116 Series


Specifications

Current Rating :	1.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	300V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C


Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 LCP


All materials must meet Greenconn's requirements for environmental protection.

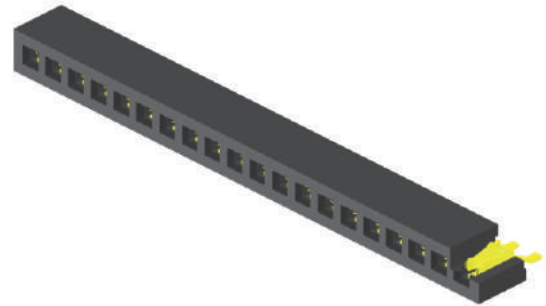

Mating with

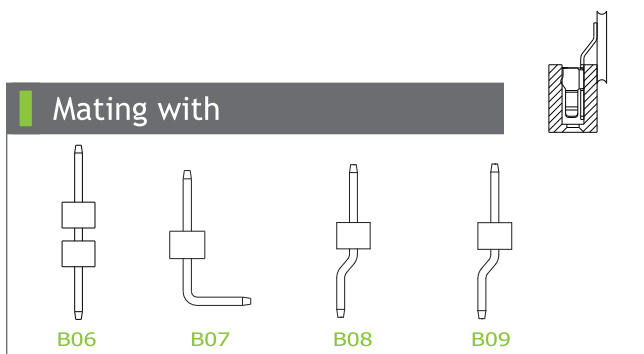

P.S. : Suggested mating pin length : 1.5 ~1.9 mm

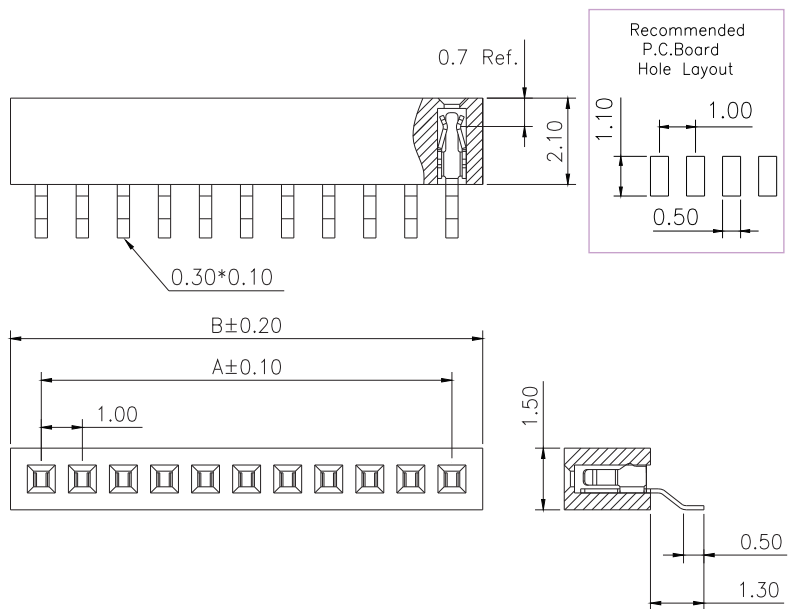

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	A	B		A	B		A	B		A	B
02	1.00	2.50	11	10.00	11.50	21	20.00	21.50	31	30.00	31.50
03	2.00	3.50	12	11.00	12.50	22	21.00	22.50	32	31.00	32.50
04	3.00	4.50	13	12.00	13.50	23	22.00	23.50	33	32.00	33.50
05	4.00	5.50	14	13.00	14.50	24	23.00	24.50	34	33.00	34.50
06	5.00	6.50	15	14.00	15.50	25	24.00	25.50	35	34.00	35.50
07	6.00	7.50	16	15.00	16.50	26	25.00	26.50	36	35.00	36.50
08	7.00	8.50	17	16.00	17.50	27	26.00	27.50	37	36.00	37.50
09	8.00	9.50	18	17.00	18.50	28	27.00	28.50	38	37.00	38.50
10	9.00	10.50	19	18.00	19.50	29	28.00	29.50	39	38.00	39.50
			20	19.00	20.50	30	29.00	30.50	40	39.00	40.50

Ordering Information

Standard Packaging : Tube

CSCD1	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>	-	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input checked="" type="checkbox"/> <input type="checkbox"/>	A001C1AC
	Height Option (H) Standard		No. of Pins per Row	Standard Plating	
	<input type="checkbox"/> 16		<input type="checkbox"/> 02	<input type="checkbox"/> 02 : Gold Flash	
			<input type="checkbox"/> 40	Selective Plating	
				<input type="checkbox"/> 01 : Tin	

Female Header

pitch 1.00mm (0.039") | Single row | S.M.T. | Locating peg

CSCC211 Series


Specifications

Current Rating :	1.0 Ampere
Insulation Resistance :	1000 MΩ Min
Dielectric Withstanding :	300V AC
Contact Resistance :	20 mΩ Max
Operating Temperature :	-40°C to +105°C



Materials

Contact Material :	Phosphor Bronze
Insulation Material :	High Temperature Thermoplastic, 94V-0 LCP


All materials must meet Greenconn's requirements for environmental protection.

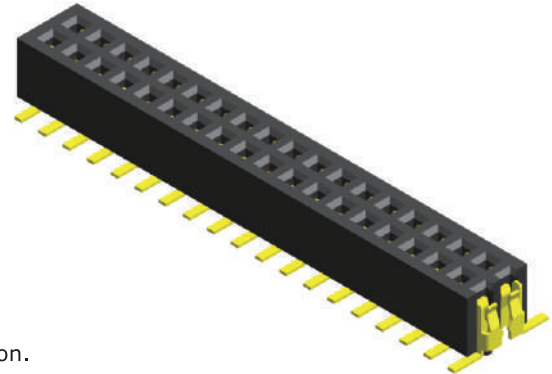

Mating with

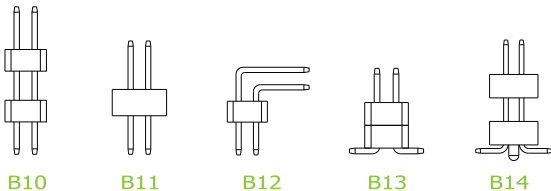

P.S. : Suggested mating pin length : 1.5 ~1.9 mm

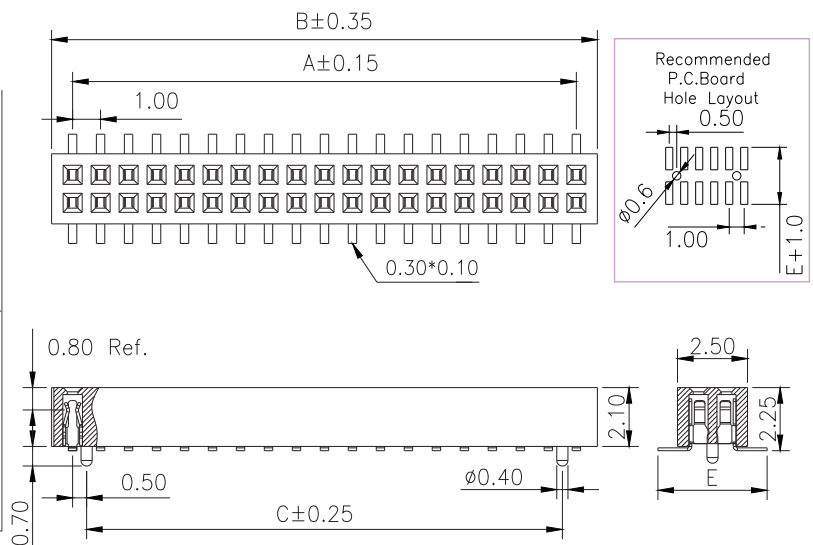

* For Coded Dimension Not Inside The Table, Please Refer To "Ordering Information"

No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	A	B	C		A	B	C		A	B	C		A	B	C
02	1.00	2.50		11	10.00	11.50	9.00	21	20.00	21.50	19.00	31	30.00	31.50	29.00
03	2.00	3.50	1.00	12	11.00	12.50	10.00	22	21.00	22.50	20.00	32	31.00	32.50	30.00
04	3.00	4.50	2.00	13	12.00	13.50	11.00	23	22.00	23.50	21.00	33	32.00	33.50	31.00
05	4.00	5.50	3.00	14	13.00	14.50	12.00	24	23.00	24.50	22.00	34	33.00	34.50	32.00
06	5.00	6.50	4.00	15	14.00	15.50	13.00	25	24.00	25.50	23.00	35	34.00	35.50	33.00
07	6.00	7.50	5.00	16	15.00	16.50	14.00	26	25.00	26.50	24.00	36	35.00	36.50	34.00
08	7.00	8.50	6.00	17	16.00	17.50	15.00	27	26.00	27.50	25.00	37	36.00	37.50	35.00
09	8.00	9.50	7.00	18	17.00	18.50	16.00	28	27.00	28.50	26.00	38	37.00	38.50	36.00
10	9.00	10.50	8.00	19	18.00	19.50	17.00	29	28.00	29.50	27.00	39	38.00	39.50	37.00
				20	19.00	20.50	18.00	30	29.00	30.50	28.00	40	39.00	40.50	38.00

Ordering Information

Standard Packaging : Tube

CSCC2	<input type="checkbox"/> <input type="checkbox"/>	-	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	<input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>	C1AC
	Height Option (H) Standard		No. of Pins per Row	Standard Plating	Pin Length (E)		
	<input type="checkbox"/> 11		<input type="checkbox"/> 02	<input type="checkbox"/> 02 : Gold Flash	<input type="checkbox"/> 001 : E=3.90		
			<input type="checkbox"/> 40	Selective Plating			
				<input type="checkbox"/> 01 : Tin			
					For special length requirement Please contact our sales personnel		



Specifications

Current Rating :	0.5 Ampere
Insulation Resistance :	500 MΩ Min
Dielectric Withstanding :	150V AC
Contact Resistance :	50 mΩ Max
Operating Temperature :	-45°C to +125°C

Materials

Contact Material :	Phosphor Bronze
Orient Slice :	Brass
Insulation Material :	High Temperature Thermoplastic, 94V-0 Nylon

All materials must meet Greenconn's requirements for environmental protection.

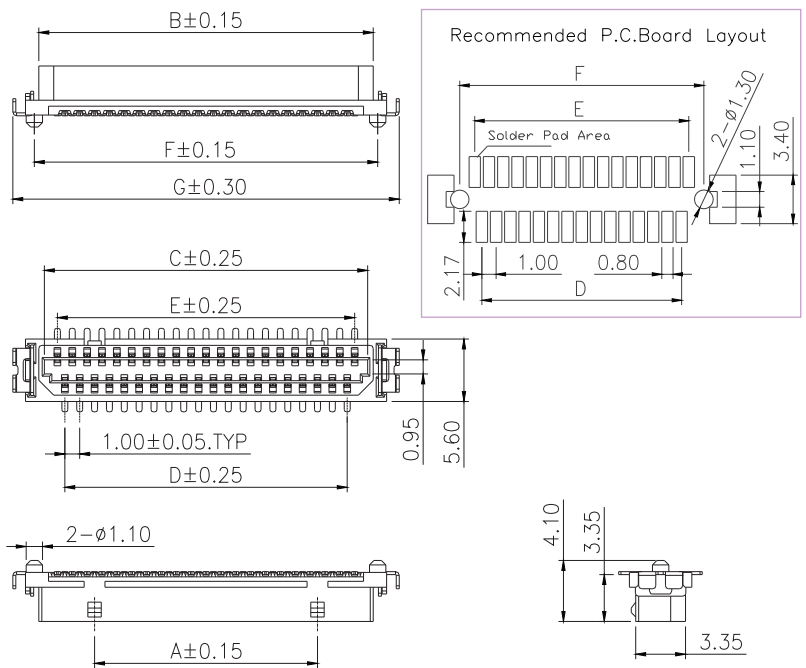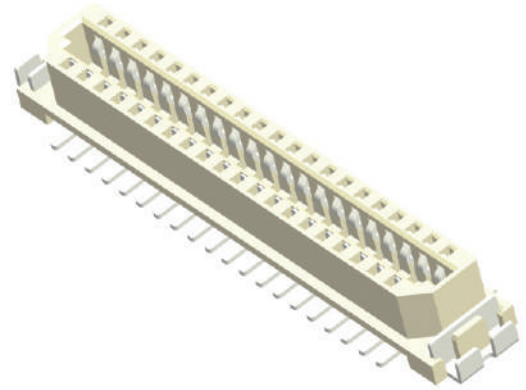

No. of Pins/Row	Dimension Information						
	A	B	C	D	E	F	G
09		6.50	5.75	3.00	4.00	2.80	5.80
11		7.50	6.75	4.00	5.00	3.80	6.80
13		8.50	7.75	5.00	6.00	4.80	7.80
15		9.50	8.75	6.00	7.00	5.80	8.80
17	3.00	10.50	9.75	7.00	8.00	6.80	9.80
19	4.00	11.50	10.75	8.00	9.00	7.80	10.80

No. of Pins/Row	Dimension Information						
	A	B	C	D	E	F	G
21	5.00	12.50	11.75	9.00	10.00	8.80	11.80
23	6.00	13.50	12.75	10.00	11.00	9.80	12.80
25	7.00	14.50	13.75	11.00	12.00	10.80	13.80
31	10.00	17.50	16.75	14.00	15.00	13.80	16.80
41	15.00	22.50	21.75	19.00	20.00	18.80	21.80
51	20.00	27.50	26.75	24.00	25.00	23.80	26.80

Ordering Information

Standard Packaging : Film Tape Real

GWCC2	<input type="text" value="XX"/>	-	<input type="text" value="XX"/>	<input type="text" value="XX"/>	B001R4AH
	Height Option (H) Standard		No. of Pins per Row	Standard Plating	
	<input type="text" value="02"/>		<input type="text" value="09"/> <input type="text" value="11"/> <input type="text" value="13"/> <input type="text" value="15"/> <input type="text" value="17"/> <input type="text" value="19"/> <input type="text" value="21"/> <input type="text" value="23"/> <input type="text" value="25"/> <input type="text" value="31"/> <input type="text" value="41"/> <input type="text" value="51"/>	<input type="text" value="01"/> : Tin	

Greenconn provides




Floating Connectors



8Gbps High-speed Connector



RJ45 Series

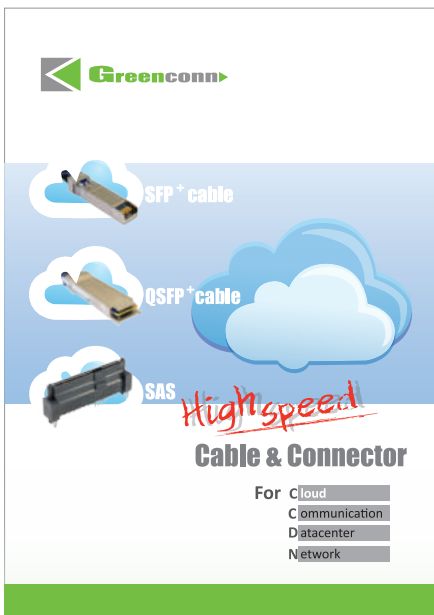

High Speed Series



Connector Brochure


Memo.




China


Greenconn Technology (Ganzhou) Ltd.

 The Dongshan Industrial District, Nankang District,
Ganzhou City, Jiangxi Province

 + 86 - 797 - 6635 510

 + 86 - 797 - 6635 653

 No.1 Niujiao Road, Yanchuan Community, Yanluo Street,
Baoan District, Shenzhen City, Guangdong Province

 + 86 - 755 - 2707 0050/1

 + 86 - 755 - 2707 0056

Kunshan Greenconn Technology Co., Ltd.

 No.18-2 Hong-Yang South Road, Bacheng Town,
Kunshan City, Jiangsu Province


 + 86 - 512 - 5782 5636


 + 86 - 512 - 5031 6595

Taiwan

Greenconn Corporation

 5F, No. 657-3, Zhongzheng Road, Xinzhuang District,
New Taipei City 242

 + 886 - 2 - 2209 1343

 + 886 - 2 - 2901 9811



www.greenconn.com
sales@greenconn.com

