



HBC 35A-1200A

Class of Operation: aR

保护特性: aR



Standard/ 标准: IEC 60269-4, GB/T 13539.4, UL 248-13

INTERRUPTING CAPACITY / 分断能力:

200,000 amperes at 500V AC (35A-1200A)

50,000 amperes at 500V DC (35A-1200A)

TECHNICAL PARAMETERS/ 技术参数:

CATALOG NO. 目录编号	CURRENT RATING 额定电流	SAFETY APPROVALS 安全认证	
		cURus	
HBC35	35A	○	
HBC40	40A	○	
HBC45	45A	○	
HBC50	50A	○	
HBC60	60A	○	
HBC70	70A	○	
HBC80	80A	○	
HBC90	90A	○	
HBC100	100A	○	
HBC125	125A	○	
HBC150	150A	○	
HBC175	175A	○	
HBC200	200A	○	
HBC225	225A	●	
HBC250	250A	●	
HBC275	275A	●	
HBC300	300A	●	
HBC325	325A	●	
HBC350	350A	●	
HBC400	400A	●	
HBC450	450A	●	
HBC500	500A	●	
HBC600	600A	●	
HBC700	700A	○	
HBC800	800A	○	
HBC1000	1000A	○	
HBC1200	1200A	○	

● DENOTES FOR APPROVAL


● 表示已取得安全认证

○ DENOTES FOR PENDING

○ 表示正在申请安全认证

Dimensions/ 尺寸:


Unit unit: mm

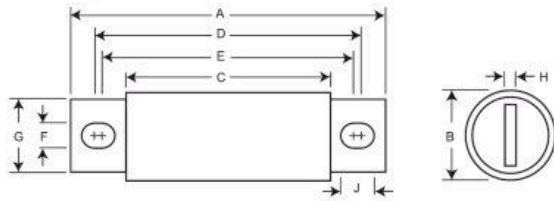

HBC 平均 I-T 曲线图 (仅供参考)

AVERAGE I-T CHARACTERISTICS CURVE

(FOR REFERENCE ONLY)

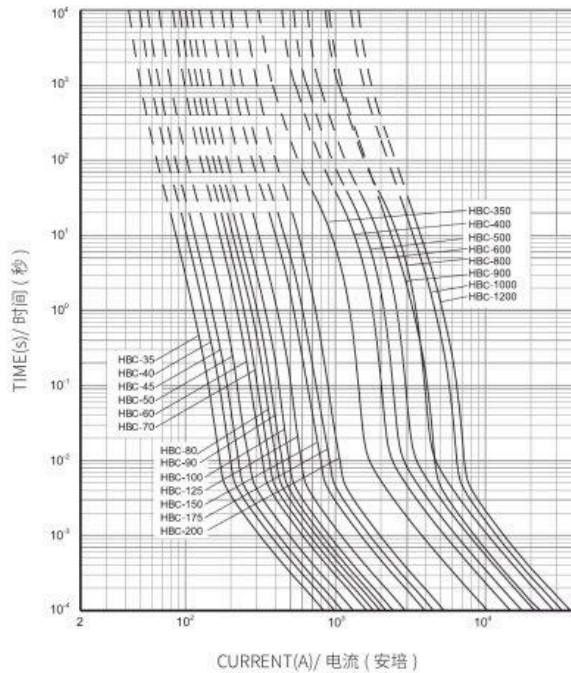

CATALOG NUMBER	A	B	C	D	E	F	G	H	J
HBC35 to 100	92	25.1	54	77	71.6	8.2	18	3.2	10.8
HBC125 to 200	92	31	54	75.6	72	8.6	24	4.8	10.4
HBC225 to 400	110	38	54	88	74.4	10.4	25.4	6.4	17.2
HBC450 to 600	110	50.8	54	90	74.4	10.4	38	6.4	18.2
HBC700 to 800	161	63.5	54	126.2	87.8	13.5	50	9.6	32.7
HBC1000 to 1200	177	76.2	82	137.8	112.4	15.8	60	11	28.5