

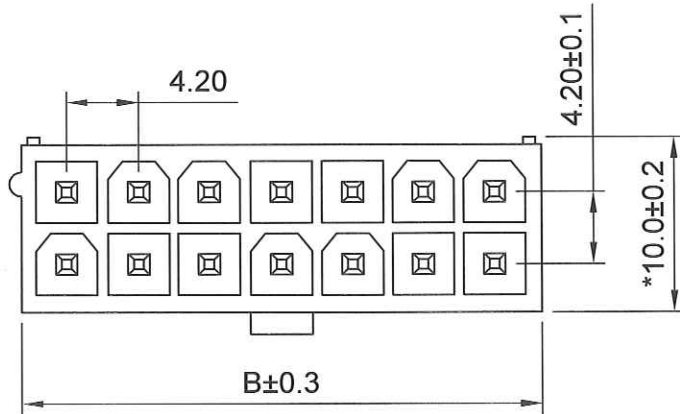
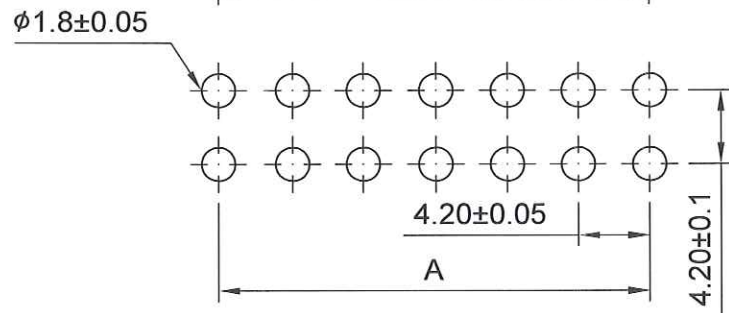


HSF
Compliant

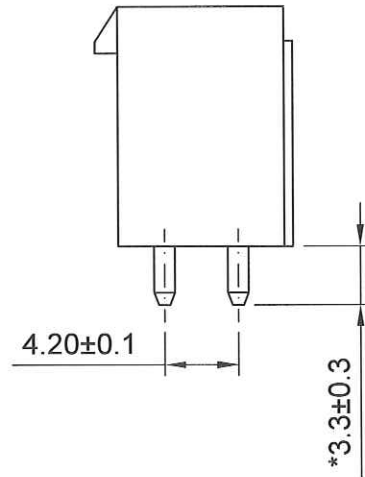

Specifications

Current & Voltage Rating : 7A & 250V AC/DC
 Insulation Resistance : 1000 MΩ min.
 Dielectric Withstanding : AC 1500V / minute
 Operating Temperature : -25°C ~ +85°C
 Contact Material : Brass
 Insulator Material : Nylon-66, UL 94V-2 (Nature)
 Finish : Tin plated
 Packing : Bag
 Applicable PC Board Thickness : 1.6mm

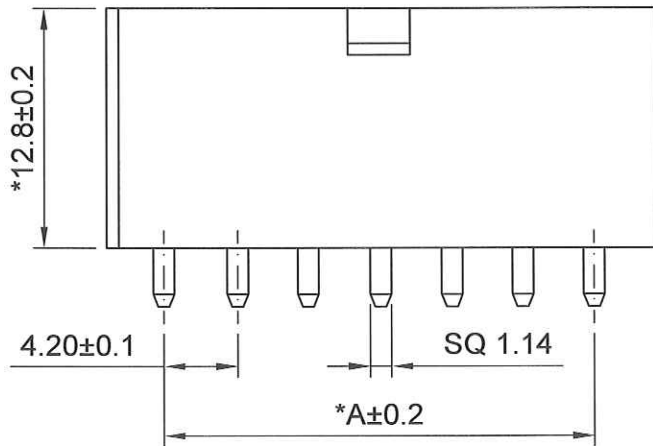

Recommended P.C.B. Layout

4420A-WS-xxT-B
 No. of contacts

No. of contacts	Dim. A	Dim. B
02	-	5.4
04	4.20	9.6
06	8.40	13.8
08	12.60	18.0
10	16.80	22.2
12	21.00	26.4
14	25.20	30.6
16	29.40	34.8
18	33.60	39.0
20	37.80	43.2
22	42.00	47.4
24	46.20	51.6

JAWS 兆旭股份有限公司
 JAWS CO., LTD.

7F., No.31, Ln. 169, Kangning St., Xizhi Dist.,
 New Taipei City 221, Taiwan (R.O.C.)
 TEL:886-2-2692-2898
 FAX:886-2-2692-2618
 Http://www.jaws.com.tw

THIRD ANGLE PROJECTION		DESIGN UNITS mm □ INCH
SIZE: A4	SCALE: FREE	SHEET: 1/1
CPN:		DWG NO.: JAWS-SOP-4420A011
DAN NO.: S10204-011		REV. 01

TITLE: 4.2mm Wafer
 Dual Rows, Straight Type (SQ pin)
 PARTS NO.: 4420A-WS-xxT-B

GENERAL TOLERANCES:	
X.X	±0.30
X.XX	±0.20
X.XXX	±0.10
ANGLE	±N/A

DRAWN	林峻吉	DATE	2013/04/11
CHECKED	林金長	DATE	2013/04/11
APPROVED	李佳宜	DATE	2013/04/11