

MATERIAL ⚠

Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Brass

ORDER INFORMATION

5 B H 2 S D C 5 6 - X X X X X X U - 0 0

Ⓞ:Standard Recommend




No. of contacts
(06~68)

G0:Gold Flash	S0:Selective
GA:5u"	SA:5u"
GB:10u"	SB:10u"
GC:20u"	SC:20u"
GD:30u"	SD:30u"
T0:Tin Plated	
TE:Tin 200u"	


5:W/O peg

T:Tube, W/O Cap
C:Tube, With Cap
H:Tape & Reel, W/O Cap
R:Tape & Reel, With Cap
Ⓞ:A:Tray, W/O Cap
P:Tray, With Cap



RoHS

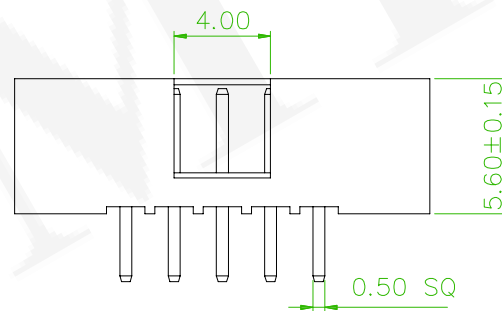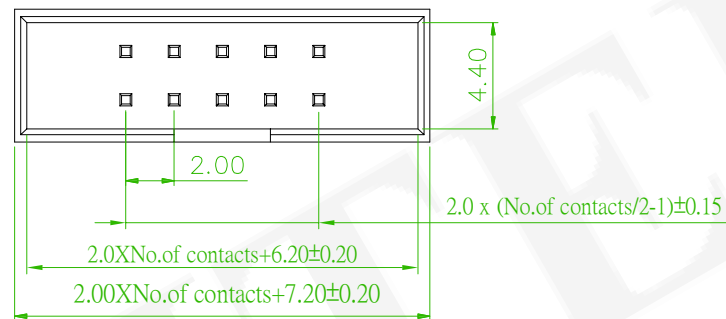

Old Part No.:BH2S-XX-U

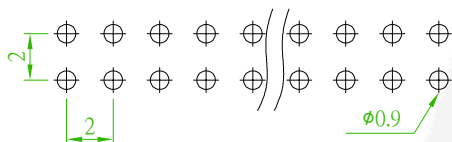

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	BOX HEADER 2.0mm			頁數 Page	1/1
	品號 PART NO.	5BH2SDC56-XXXXXXU-00 ⚠			繪圖 DRAWN	Tim 2022/10/05
	圖號 DRAWING NO.	GN057-TI034	版本 REV.	B	核對 CHECKED	Josh 2022/10/05
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2022/10/05
	公差 TOLERANCE	.X ± 0.30 .XX ± 0.25	單位 UNIT	mm	THIRD ANGLE PROJECTION	

ECN NO.:231004 Revise the drawing

Randy

2023/10/23

ECN NO. OR DESCRIPTION

REVISED

DATE

⚠

REV.