

SPECIFICATION


Current Rating: 1 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20m Ω Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature:-40°C to +105°C

MATERIAL



Insulator:Hi-Temp. Thermoplastic, UL94V-0, Black
 Contact Pin:Copper Alloy

ORDER INFORMATION


5 P S 3 M S A 4 4 - 2 X X X X X X N X U - 0 0

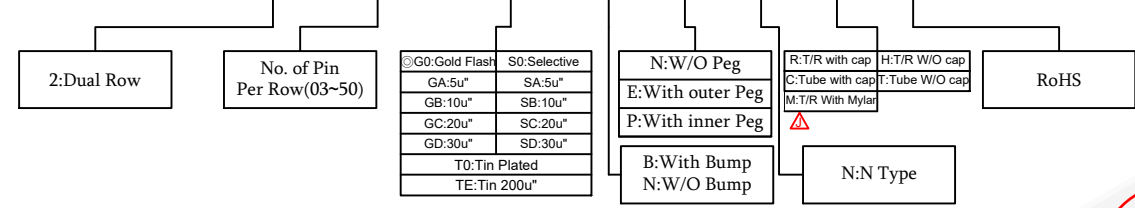


AMTEK 耀德
 2022.05.24
 Released DCC

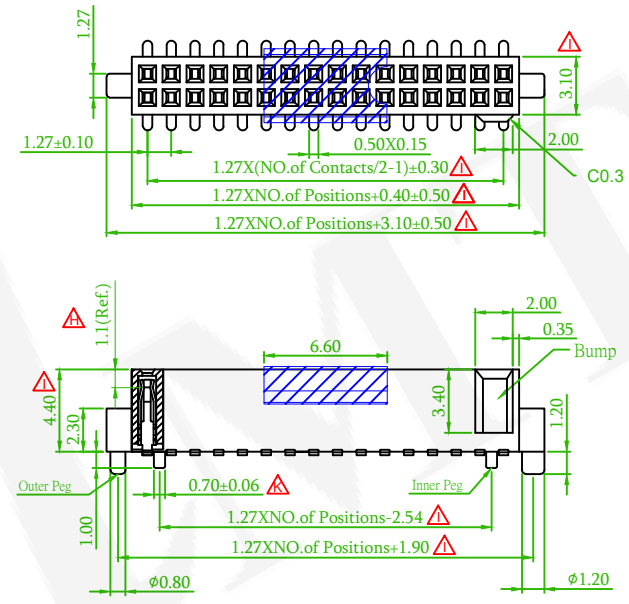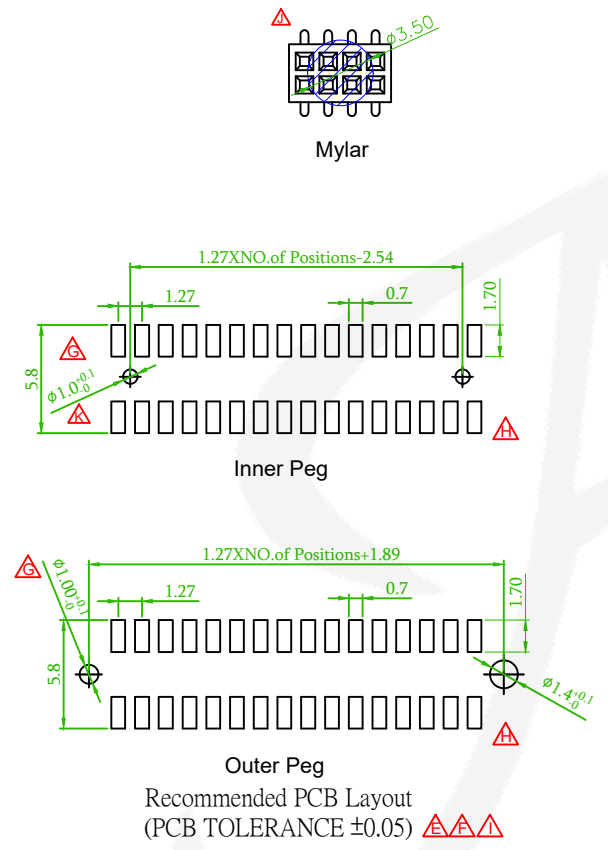


Inner Peg




Outer Peg



Special CAP for 2*2P
2*3P
2*4P
W/O Bump



Special CAP for 2*4P
2*5P
2*6P
With Bump



Old Part No. : PS3M44-2XX-U


Amtek Technology Co., Ltd.
 耀德精密有限公司
 TEL: 886-2-2260-6878
 FAX: 886-2-2260-8030

品名 TITLE	FEMALE HEADER 1.27mm D/R V/T SMT TYPE				頁數 Page	1/1
品號 PART NO.	5PS3MSA44-2XXXXXXNXU-00			繪圖 DRAWN	Roy 2015/08/31	
圖號 DRAWING NO.	GN003-RL223	版本 REV.	K	核對 CHECKED	Josh 2018/10/11	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/10/11	
公差 TOLERANCE	.X ± 0.20 .XX ± 0.12	.X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION	

	ECN NO.:220505 Revise the Drawing	Alice	2022/05/18
	Add the Mylar	Alice	2021/10/12
	ECN NO.:210727 Revise the Drawing	Benson	2021/08/09
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

5PS3MSA44-2XXXXXXNXU-00

Female Header 1.27mm 2 Row H=4.4mm SMT Type

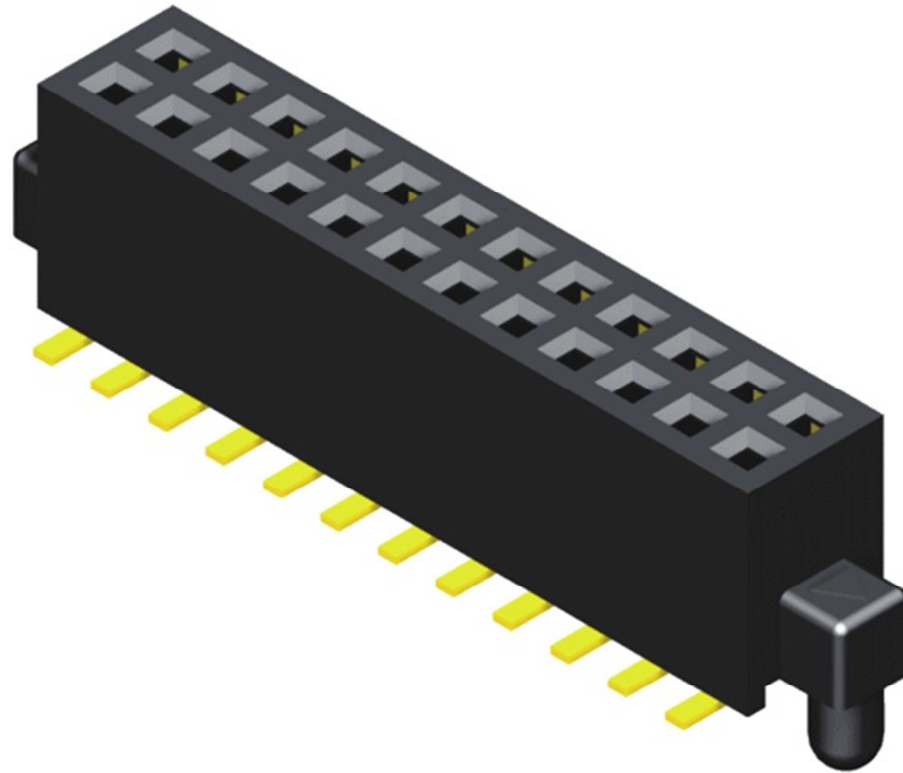

Specification:

Current Rating: 1 AMP

Insulation Resistance: 1000M Ω Min.

Contact Resistance: 20m Ω Max.

Dielectric Voltage: 500V AC for one minute

Operation Temperature: -40°C to +105°C

Material

Insulator: Hi-Temp. Thermoplastic, UL94V-0, Black

Contact Pin: Copper Alloy