
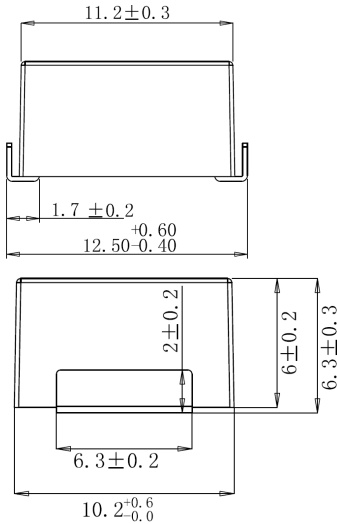


492 High current square Fuse



Main Characteristics

Square fuse; Time-Lag(T)

Standard

UL248-1

Materials

Body: Thermoplastic
End Caps: Tinned copper terminal

Operating Temperature

-55°C to +125°C

Stock Temperature

+10°C to +60°C


Relative humidity: ≤75% yearly average
Without dew, maximum 30 days at 95%

Vibration Resistance

24 cycles at 15 min. each (60068-6)
10-60Hz at 0.75mm amplitude
60-2000Hz at 10g acceleration

Soldering Parameters

260°C. ≤10 sec (Wave Soldering)
300°C. ≤2 sec (Hand Soldering)
Soldering Peak:
260°C. 10 sec.
280°C. 5 sec. (IEC 60068-20)

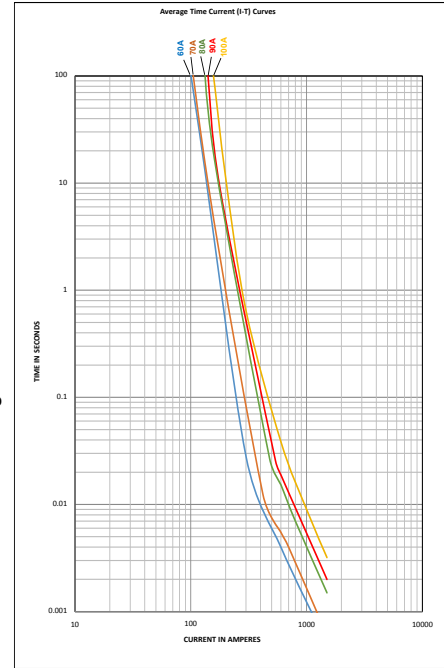

Dimensions(unit:mm)

Time vs Current Characteristics: UL-248-1

Rated Current	100%	200%
60A~100A	>1H	<60s



Electrical Characteristics at 25°C

Amp Code	Rated Current	Rated Voltage	max.Voltage Drop (mV)	Breaking Capacity	Typical Melting $I^2t(A^2sec)$	Typical Cold Resistance (mΩ)	Approval
							cURus
2600	60A	75V DC 100V DC	73	1500A@75VDC 1000A@100VDC	1148	0.78	•
2700	70A		75		1373	0.75	•
2800	80A		80		3420	0.58	•
2900	90A		85		4725	0.56	•
3100	100A		90		7313	0.5	•

Note: (1) Permissible continuous operating current is ≤100% at ambient temperature of 23°C (73.4°F)
(2) I²t is calculated at test time in 1500A current.

Ordering Information

Series	Amp Code	Supplementary Code	Qty
492			