





MINIATURE 5 VDC OUTPUT DIGITALLY CORRECTED FLATPACK PRESSURE TRANSDUCER

LL-DC-600 SERIES

- Wind Tunnel, Flight Test
- 5 VDC Output
- Moisture Protected
- High Accuracy Digital Correction
- Patented Leadless Technology **VIS**[®]

The LL-DC-600 series transducers are an excellent solution for Wind Tunnel and Flight Test pressure measurement applications. Their light weight and flat packaging makes them especially suitable for direct adherence to test parts where other means of pressure installation are undesirable or not possible. These transducers incorporate the latest Kulite patented technologies in pressure sensor development. The Digitally Corrected output of these transducers enables them to have accuracies down to .5% TEB over a fairly wide temperature range.

Part performance not guaranteed if used in water.

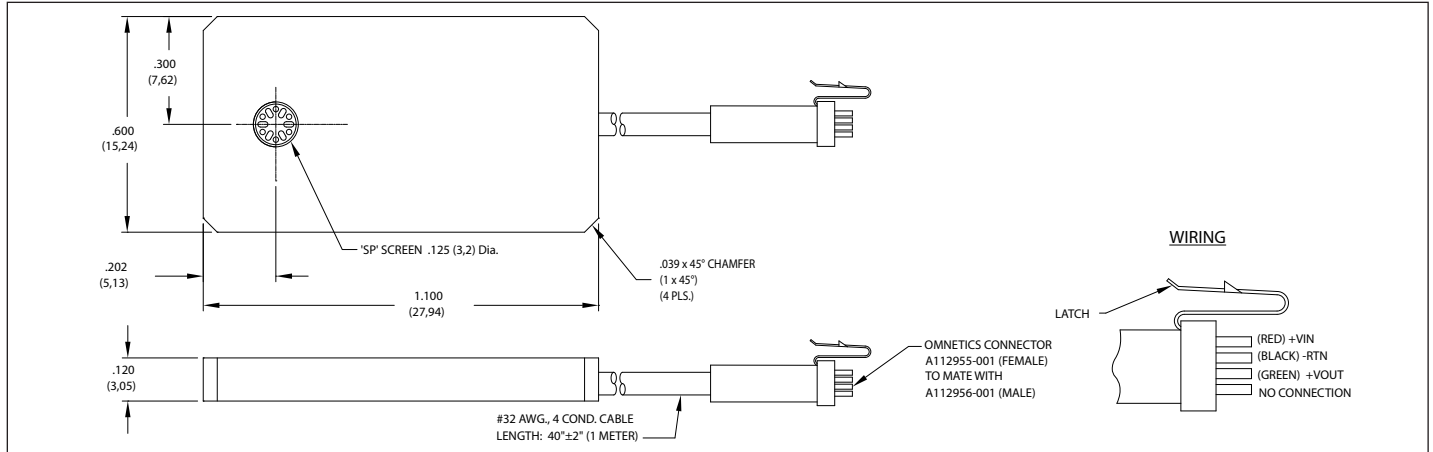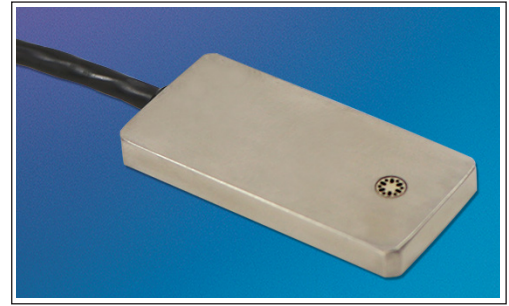

INPUT	Pressure Range	1 15	1.7 25	3.5 50	7 100
	Operational Mode	Absolute			
	Over Pressure	2 Times Rated Pressure Range			
	Burst Pressure	3 Times Rated Pressure Range			
	Pressure Media	Most Conductive Liquids and Gases - Please Consult Factory			
	Rated Electrical Excitation	12 ± 4 VDC			
	Maximum Electrical Current	25 mA			
OUTPUT	Output Impedance	50 Ohms (Typ.)			
	Full Scale Output (FSO)	4.5 V			
	Residual Unbalance	0.5 VDC			
	Total Error Band	± 0.5% (Typ.) (End Point Settings, Combined Non-Linearity, Hysteresis, Repeatability And All Thermal Effects Included)			
	Resolution	Infinitesimal			
	Frequency Response	DC to 10 KHz			
	Acceleration Sensitivity % FS/g Perpendicular	5.0x10 ⁻⁴	3.0x10 ⁻⁴	1.5x10 ⁻⁴	1.0x10 ⁻⁴
ENVIRONMENTAL	Insulation Resistance	100 Megohm Min. @ 50 VDC			
	Operating Temperature Range	-40°F to +250°F (-40°C to +125°C)			
	Compensated Temperature Range	+50°F to +212°F (-10°C to +100°C) Other Ranges Quoted on Request			
	Linear Vibration	20g Peak, Sine 10 to 2000 Hz			
PHYSICAL	Mechanical Shock	20g Half Sine Wave 10 msec. Duration			
	Electrical Connection	4 Conductor 32 AWG Cable 1 Meter (40") Long Terminated with Omnetics Connector A112955-001(Female) to Mate with A112956-001 (Male)			
	Weight	5 Grams (Nom.) Excluding Cable			
	Sensing Principle	Fully Active Four Arm Wheatstone Bridge Dielectrically Isolated Silicon on Silicon Patented Leadless Technology			

Note: Custom pressure ranges, accuracies and mechanical configurations available. Dimensions are in inches. Dimensions in parenthesis are in millimeters. All dimensions nominal. (C) Continuous development and refinement of our products may result in specification changes without notice. Copyright © 2018 Kulite Semiconductor Products, Inc. All Rights Reserved. Kulite miniature pressure transducers are intended for use in test and research and development programs and are not necessarily designed to be used in production applications. For products designed to be used in production programs, please consult the factory.